




INSTRUCTIONS FOR SHELTER SIDEWALL ACCESSORY

SIDEWALL SET UP

Step 1. Completely set up your E-Z UP® Instant Shelter® in the area that you intend to shade according to the owners manual instructions.

To get full optimal sidewall coverage, set frame legs to the 3rd height adjustment hole/or middle setting.




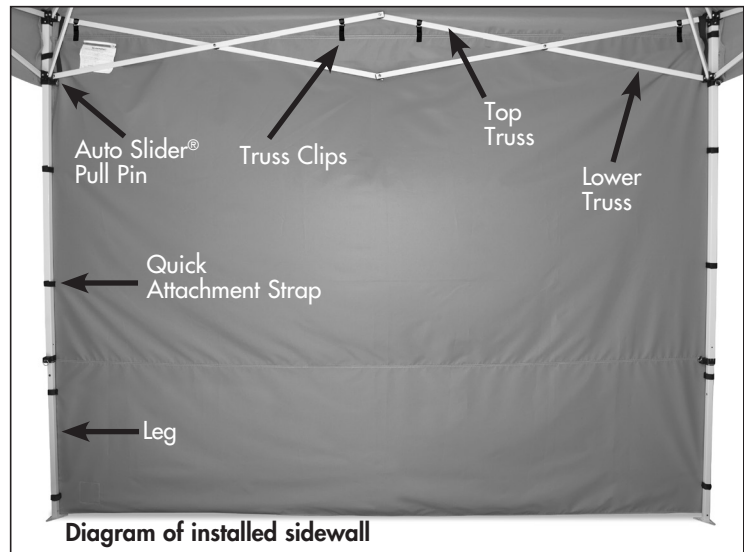


Step 2. Attach sidewall to frame as shown. (2a) Attach quick attachment truss clips around the top truss as shown.

Step 3. Wrap quick attachment hook and loop straps around the legs of the shelter. (3a) Press straps into pad firmly.

Note:

- The top of the sidewall tucks underneath the valance of the fabric top.
- All professional E-Z UP® sidewalls have zippers on both sides to fully enclose your E-Z UP® Instant Shelter® with four sidewalls if desired.
- To ensure proper sidewall fit, slightly position legs inward and then attach sidewalls. Walls should be attached **BEFORE** frame is staked or secured down.



Sidewall Care:

Use a mild soap (not detergent) and plenty of water for cleaning.

Let the E-Z UP® Instant Shelter® top, frame and sidewalls dry completely before closing or storing to avoid mildew.

Important Information:

- Always stake or weigh down your shelter. Do not use in any potentially windy or rainy weather. Wind and rain can damage the E-Z UP® Instant Shelter® product and may also result in injury to you or others. Therefore, do not rely on shelter for protection in heavy or prolonged rain storms.
- The E-Z UP® Instant Shelter® product is designed as a temporary shelter. Do not leave up for extended periods.
- Use caution when handling the E-Z UP® folding frame. Avoid pinching hands or fingers as frame opens or closes.
- Do not use shelter in a lightning storm.
- Do not leave your E-Z UP® Instant Shelter® product unattended.
- Do not build fires within shelter enclosure.

INTERNATIONAL E-Z UP, INC.

1900 Second Street, Norco, California 92860 USA

Phone (951) 279-0999 • Fax (951) 279-0888 **ezup.com**

800-45 SHADE
800-457-4233