

ASSEMBLY INSTRUCTIONS

Item: FX-3819-4

* THESE INSTRUCTIONS ARE PROVIDED FOR YOUR SAFETY PURPOSE AND IT IS VERY IMPORTANT THAT THEY ARE READ COMPLETELY BEFORE BEGINNING INSTALLATION OF YOUR FIXTURE.*

* DIRECT WIRE FIXTURES: WE STRONGLY RECOMMEND INSTALLATION BY A LICENSED ELECTRICIAN. *

* SHUT OFF THE MAIN ELECTRICAL SUPPLY AT FUSE BOX/CIRCUIT BREAKER. *

CAREFULLY UNPACK AND PLACE ALL PARTS ON A SMOOTH SURFACE.

1. SCREW LOWER PARTS(M) AND UPPER PARTS(K) TO THE SOCKET CENTER(L), MAKE SURE LOWER PARTS AND UPPER PARTS ARE AT THE SAME DIRECTION.

2. ATTACH 4 ARC TUBES (J) TO THE LOWER PARTS(M) / UPPER PARTS(K) AND TIGHTEN WITH SET SCREW(I).

3. JOIN THE CHAINS(F) THE COLLAR LOOP OR HANGER LOOP (G) WITH QUICK LINK(E).

4. AFFIX MOUNTING STRIP(A) TO THE JUNCTION BOX WITH MOUNTING SCREW(B).


5. PUT THE WIRES THROUGH THE CANOPY (D) AND MOUNTING STRIP(A) AND MAKE WIRE CONNECTIONS:CONNECT THE GREEN GROUND WIRE "⏏" TO THE SUPPLY WIRE, CATHODE WIRE "N" IN WHITE TO THE SUPPLY WIRE, ANODE WIRE "L" IN BLACK TO THE SUPPLY WIRE IN THE JUNCTION BOX AS ILLUSTRATED WITH WIRE NUTS.

6. ATTACH THE CANOPY(D) TO THE MOUNTING STRIP(A) AND TIGHTEN WITH SIDE SCREWS (C).

7. INSTALL RECOMMENDED BULBS (NOT INCLUDED IN THIS PACKAGE)

TURN ON POWER AND ENJOY!!!!

USE MAX 60W*4 TYPE A BULB (BULBS NOT INCLUDED)

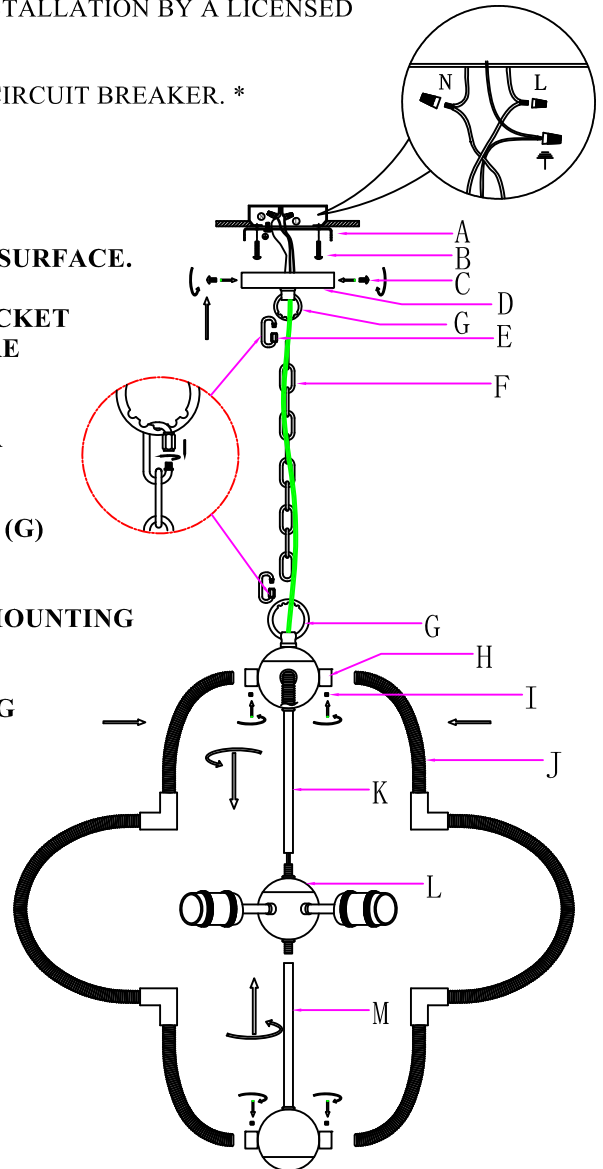

TO REPLACE THE BULB:

TURN OFF POWER (UNPLUG FROM THE WALL OUTLET) BEFORE REPLACING THE BULB, MAKING SURE THE BULB HAVE SUFFICIENT TIME TO COOL DOWN.

DO NOT SUBJECT THIS FIXTURE TO ANY SHOCK WHILE LIT AS SHATTERING OF BULBS MAY RESULT.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.