

Assembly Instructions


Caution : You must read this before you proceed

Care & Maintenance




- ⊘  • Not for commercial use. For residential use only.
 - ✓  • Furniture may scratch floors. We recommend using furniture pads to protect your floors.
 - ⊘  • Do not put hot items directly on furniture surface.
 - ⊘  • Do not clean furniture with harsh cleansers or polish.
 - ⊘  • Do not place furniture under direct sunlight.
 - ⊘  • Do not place furniture near heating or cooling vents.
 - ⊘  • Do not write on furniture without a padded barrier to protect the surface.
 - ⊘  • Do not place furniture outside . For indoor use only.
 - ⊘  • Stains may be removed with mild soap solution and damp cloth.
 - ⊘  • Children should not climb or jump on the furniture.
-
- ✓  • Dust and pick-up spills using a clean, non-colored, lint-free cloth.

Please look in small carton for hardware packs and legs.
Sets often ship in multiple boxes and may arrive a day or two apart.

LOVESEAT

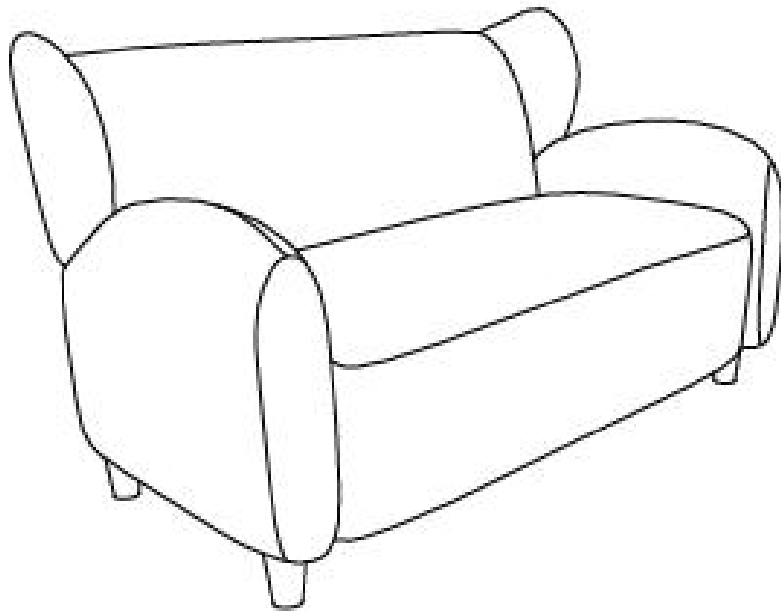

Parts List

Label	Picture	Description	QTY
A		Backrest	1
B		Left Armrest	1
C		Right Armrest	1
D		Seat	1
E		Leg	4

Hardwares

Label	Picture	Description	QTY
①		Bolt (M8*60 MM)	9
②		Washer(M8*22)	9
③		Spring Washer(M8)	9
④		Allen Wrench	1
⑤		Gasket	5

Assembly Preparation

Before
Beginning
Assembly:

Ax1

Bx1

Cx1

Dx1

Ex4

①

x9

④

x1

②

x9

⑤


x5

③

x9


- Read instructions, cover to cover-
- Have 2 adults on hand for assembly-
- Do not assemble on flooring or carpet-
- Assemble on a clean non-marring surface (packing foam)-
- Save all packaging until finished-

Assembly Steps

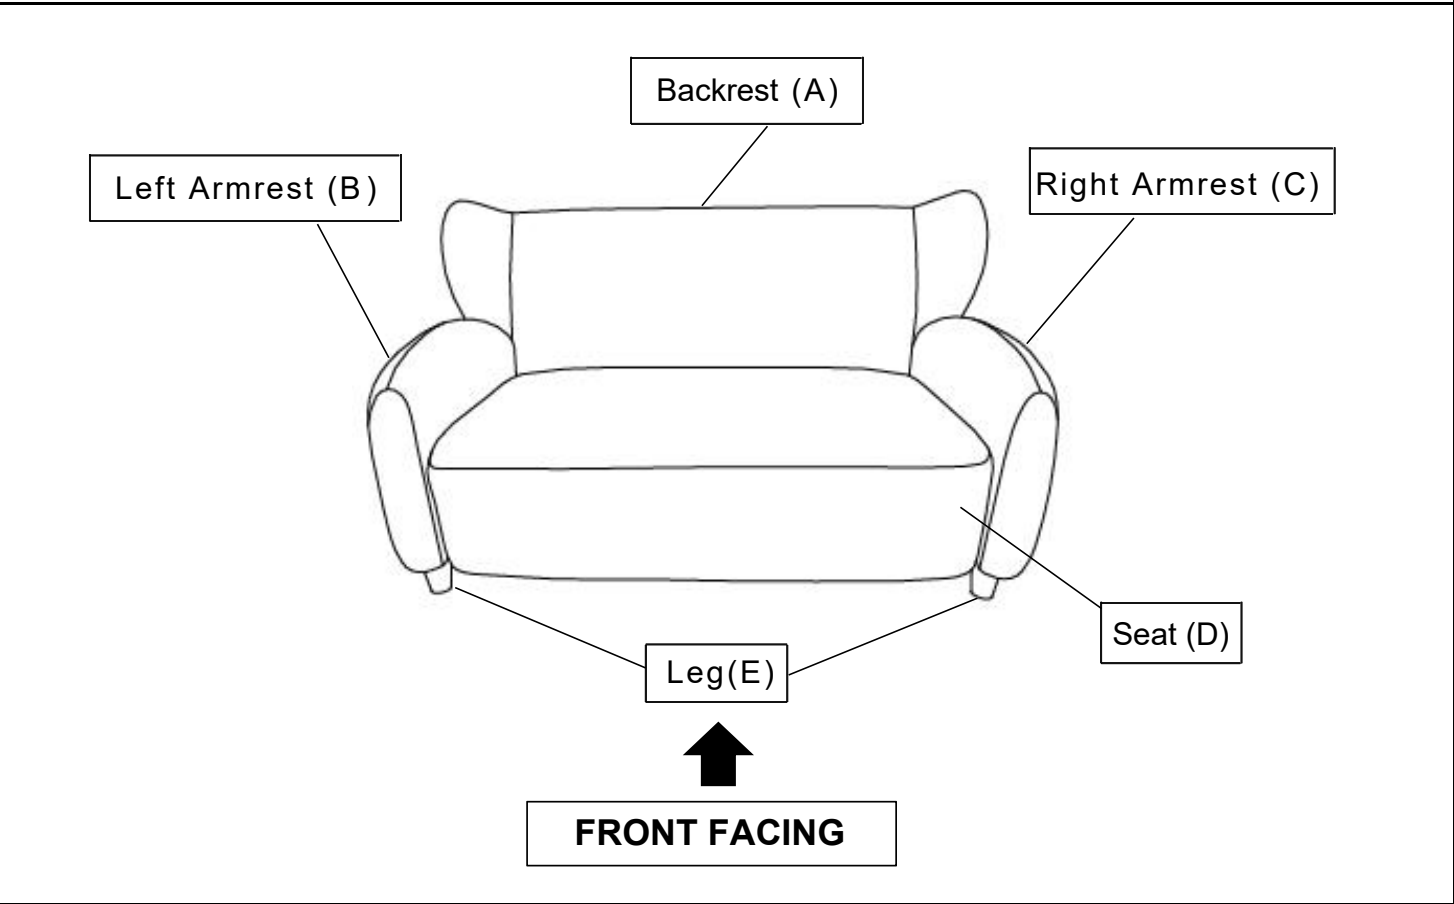


This loveseat has multiple parts and may require up to 30 minutes to assemble.
To give you an overview of the loveseat parts, the above picture is to help you put the various parts into perspective.
Please read through the instructions below to familiarise yourself with the parts and steps before assembly.
Note: It is recommended that you have an adult partner to assist during the entire assembly process.

Step 1

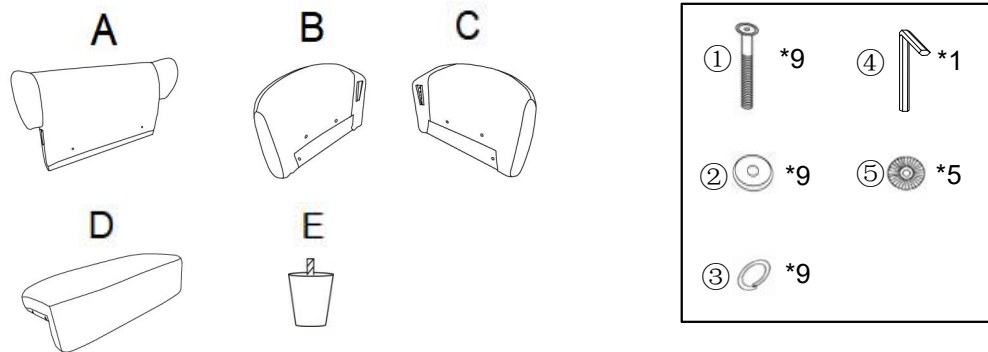

Take out the Backrest(A), Left Armrest(B), Right Armrest (C) ,Seat(D), Leg(E) and Hardware box from the Carton, place it on a clean, non-marring surface.

Step 2

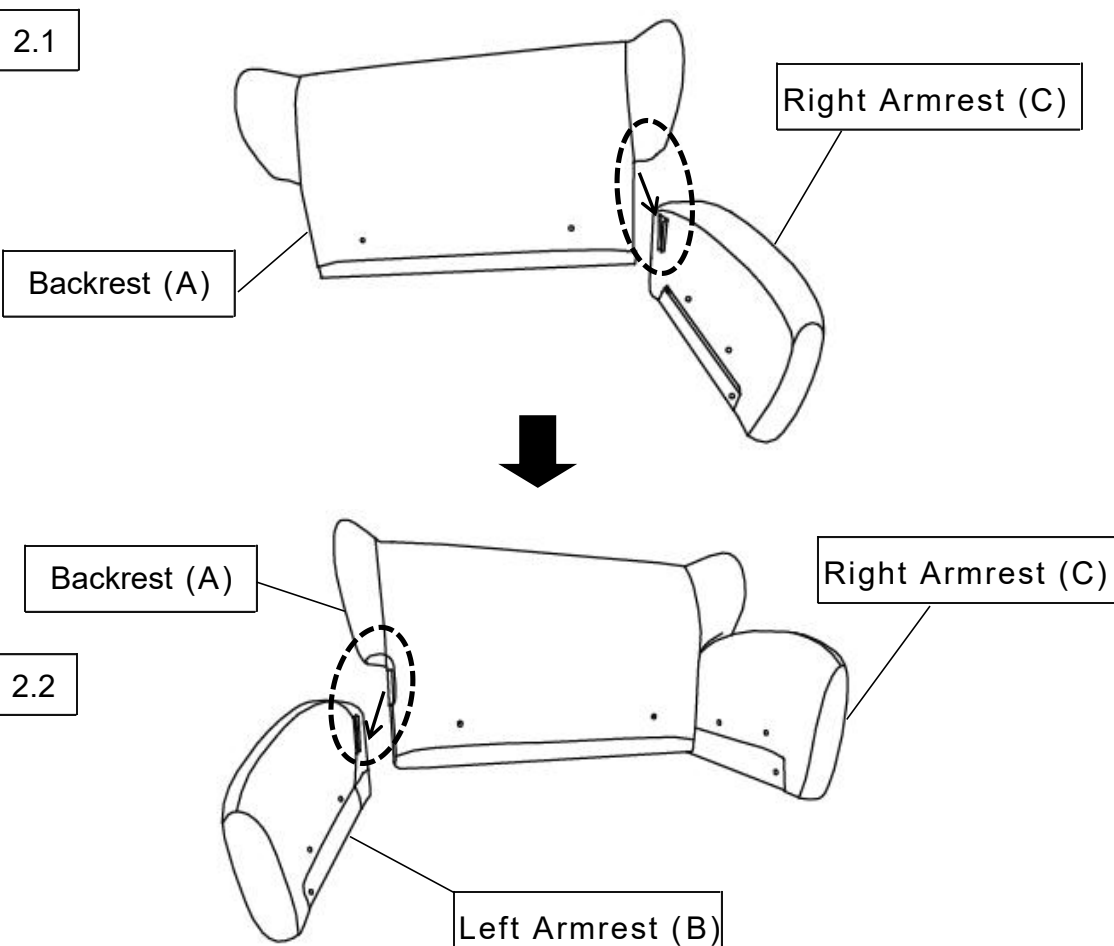

Make sure your assembly area is clean and soft to prevent the wood parts being damaged during assembly. With the assistance from your adult partner:

2.1) Lift the Backrest(A) up, make sure the Backrest(A) is vertical and aligned to the Armrests.

Align the Tapered Connectors on the Backrest(A) with those on the Right Armrests(C).

Your adult partner may need to push the Armrests in towards the Backrest(A) to allow for better alignment.

Slip and Slide the Backrest, in a gradual and balanced manner into the Tapered Connectors.

Push the Backrest(A) downwards until it is fully slotted and locked into position.

2.2) Repeat 2.1 for the Left Armrest(B) installation.

Note: Make sure the Tapered Connectors on the Backrest(A) lock into the Tapered Connectors on Armrest.

Fully locked position: Check and assess that the base of the Backrest(A) and Armrest are aligned and level.

Step 3

3.1


Left Armrest (B)

Seat (D)

Right Armrest (C)



3.2

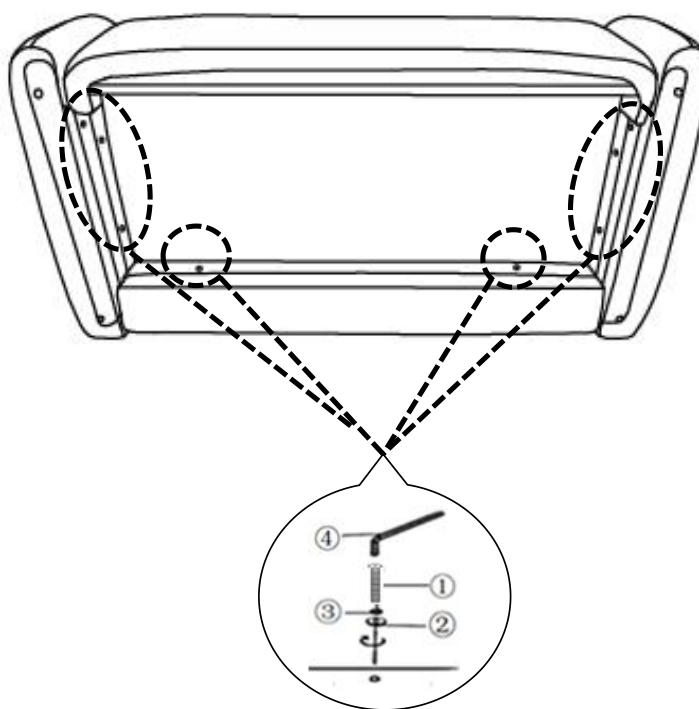

With the assistance from your partner.

3.1) Shown as above picture, Tilt and lay the STEP 2 assembled parts on its Backrest(A) onto a flat surface.

3.2) Attach the Seat(D) to the Left Armrest(B), Right Armrest(C) and Backrest(A) using 8 Bolts(①), 8 Spring Washers(③), and 8 Washers(②) with the Allen Wrench(④).


DO NOT fully tighten a Bolt in one go and then move on to the next.

Rather, in a sequential manner, gradually tighten each Bolt until all Bolts are evenly secured.

This methodology will ensure maximum evenness once all Bolts are fully tightened.


Note: Insert the bolts on the Armrest first, then go to Backrest. If you can not insert the Bolt into position on Backrest, please push the Backrest towards Seat bottom, make sure the Backrest bottom is leveling with Seat bottom.

Step 4

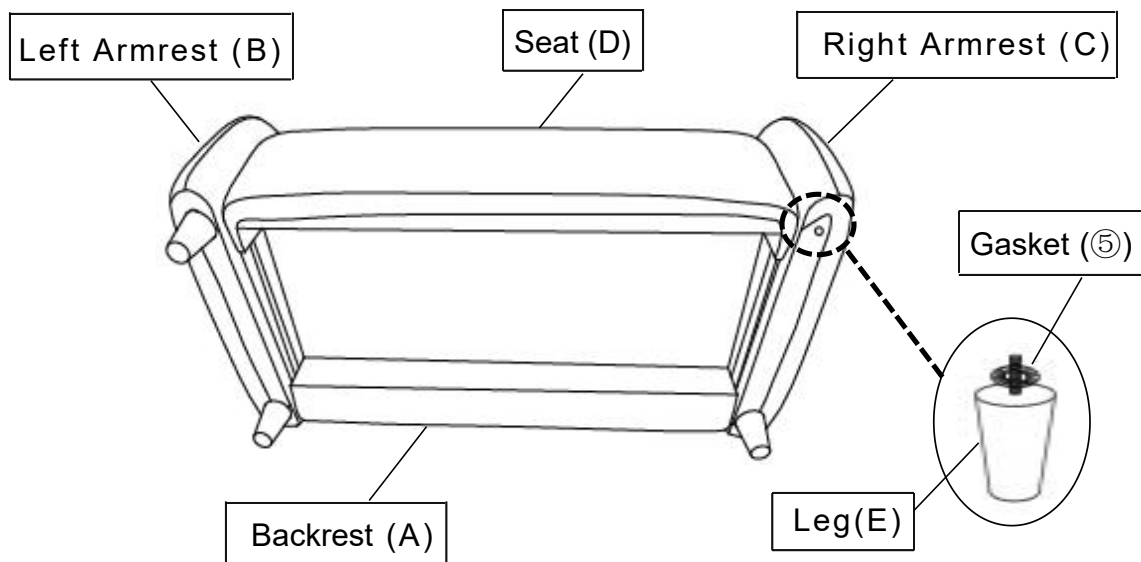

Install the Leg(E) onto the bottom of the Loveseat by placing one Gasket(⑤) on the threaded stem. Then insert the threaded stem into the threaded mounting position at the middle of the loveseat. Tighten by turning the Leg clockwise.

Step 5

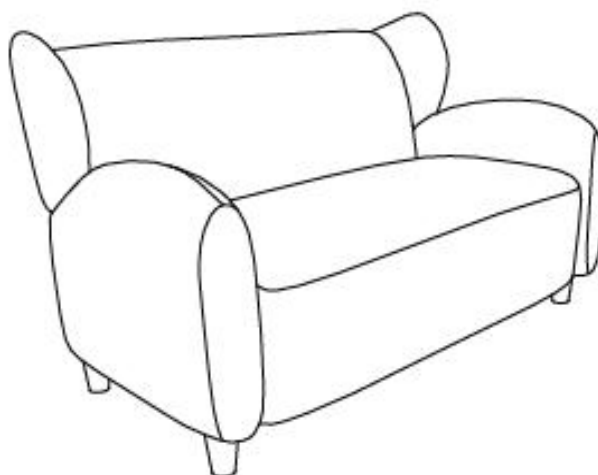

Your loveseat is ready for use.
This loveseat can only be used on a flat, level surface.