


ANZZI®

ITEM: BA-LMDFX003AL
FRONT AND BACK LIGHTING LED MIRROR
INSTALLATION & OPERATION MANUAL

V2.0
09/01/2025

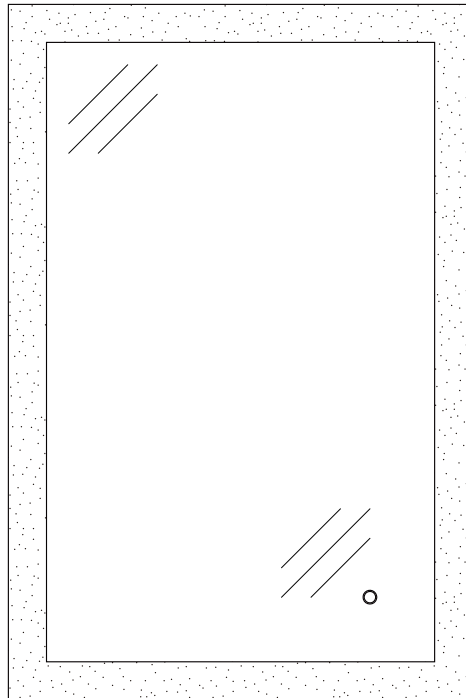

DON'T WAIT! REGISTER NOW!

Register your product within 90 days to ensure it is recognized as a purchase and covered under warranty.

Register online at <https://anzzi.com/pages/register> or scan the QR code on the next page.



PRODUCT REGISTRATION*


IMPORTANT: Warranty will not be recognized unless product is registered.

Register online at <https://anzzi.com/pages/register> or Scan the QR code below.

Registering your product maximizes your warranty benefits and ensures prompt service and support.

1

USE YOUR PHONE CAMERA
TO SCAN THE QR CODE



2

FILL IN A QUICK
REGISTRATION FORM

Thank you for your purchase!

Registering your products ensures you maximize your warranty benefits and receive prompt service and support.

Name*

Email*

City*

Order #*

Installer Name

...

Model Purchased*


Installer Phone Number

Customer Age Range

Submit

3


CLICK SUBMIT AND
ENJOY PEACE OF MIND




Need help? For technical support call 305-614-4070 or visit us at www.ANZZI.com

PRODUCT SIZE CHART

BA-LMDFX003AL 24" * 36"

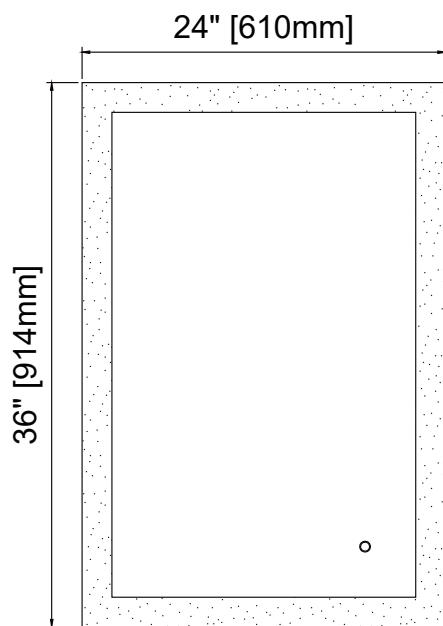


MOUNTING DIMENSIONS

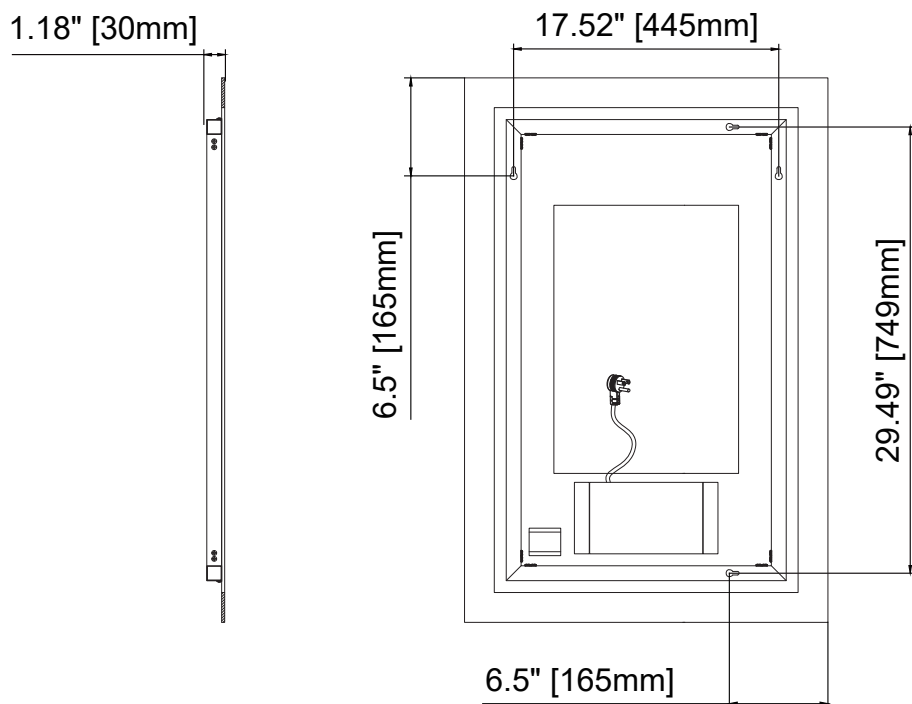

INSTALLATION INSTRUCTIONS

For the style of LED Mirror shown below



- Please read carefully and save these instructions.
- Don't discard any of the packaging until you are sure that you have all of the parts and the fittings.

DANGER

- **Make sure power to the junction box or outlet is off before commencing installation.**
- **Always unplug the mirror from the outlet or turn off the switch before cleaning or servicing to reduce the risk of electric shock.**

WARNING

- DO NOT lay mirror on tiled or concrete surface prior to installation.
- Mirror must be on protected surface to prevent chipping of the corners.
- We highly recommend you have your mirror professionally installed if you are not familiar with basic plumbing and electricity. DO NOT attempt to install, repair or disassemble the LED mirror without first disconnecting the electricity.
- When drilling pilot holes, be careful to avoid any wiring or pipe work that may be concealed behind the wall.
- The mirror must be connected to a GFCI outlet.
- Risk of Electric Shock, Fire, and Injury.
- Keep the cord away from heated surfaces.
- Risk of Electric Shock – Connect this mirror to a properly grounded outlet only. See Grounding Instructions.
- This product must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the product.
- Never operate this mirror if it has a damaged cord or plug, if it is not working properly, if it has been dropped or damaged, or dropped into water. Return the mirror to a service center for examination and repair.
- Do not operate where aerosol (spray) products are being used or where oxygen is being administered.
- To disconnect, turn off mirror and unplug power cord from outlet.
- Review the assembly instructions to confirm that the correct components and accessories are being used with the mirror.
- Close supervision is necessary when this mirror is used by or near children, invalids, or disabled persons.
- Do not use outdoors.

INSTALLATION INSTRUCTIONS

ATTENTION

- Handle the glass with caution! Improperly handling the glass can cause it to break.

- You will need at least two people to install this unit properly.

- Inspect all parts for damage; if there is damage to the unit prior to installation, please contact customer service at the number provided in this guide.

- Make sure that the electricity is turned off at the power source before proceeding with the installation or cleaning.


- Always unplug the power supply cord from the outlet before moving the product, testing the product, or repairing the product.

- The defogger operates only when the LED light is turned on.

- Use this mirror only for its intended use as described in these instructions. Do not use attachments that are not recommended by the manufacturer.

- **Statement: ANZZI does not assume any responsibility for the losses caused by the improper installation and behavior listed above or other improper operations.**


TOOLS REQUIRED




Phillips
Screwdriver



Level




Tape
Measure




Drill



1/8"
(3mm)
Drill Bit



5/16"
(8mm)
Drill Bit



Pencil




Rubber
Mallet



Safety
Glasses

INSTALLATION INSTRUCTIONS

1




X1




SCREW
(x2)



WALL PLUG
(x2)




Twist-cap Connector
(x3)





Position Template x2
(Vertical and horizontal mount options)

2

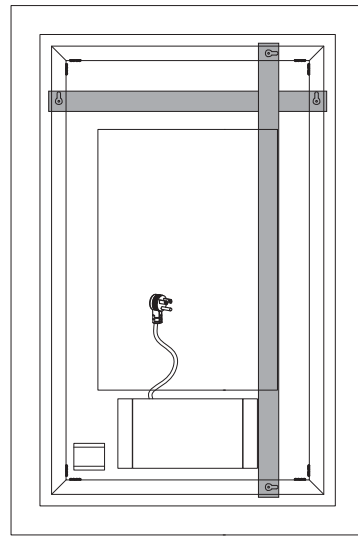


This mirror can be hung horizontally or vertically.
Make sure to use the right template.

3

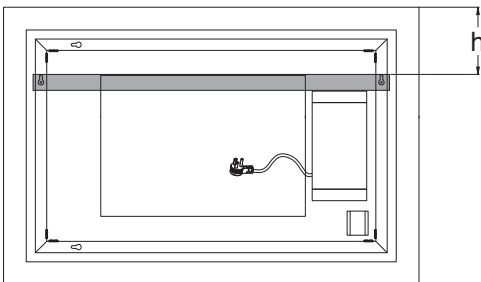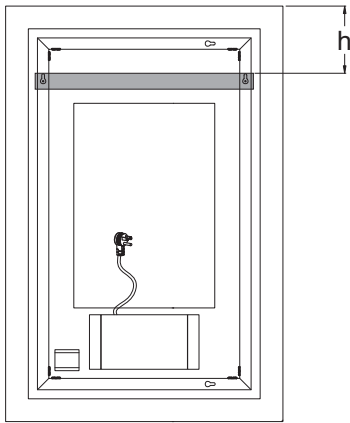

Measure the distance "h" from the Position Template to the top of the product.

4

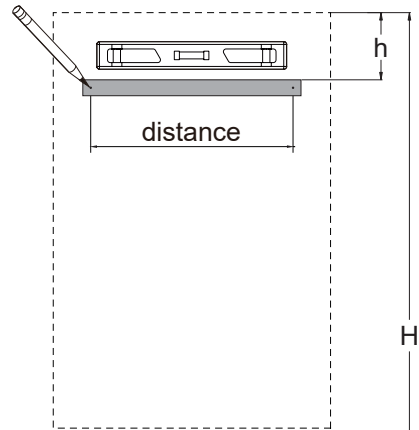


deck surface




According to the height "H" of the product, place the Position Template horizontally on the wall and mark the installation holes with pencil.
For exact distance, reference the Mounting Dimensions figure on page 1.

INSTALLATION INSTRUCTIONS

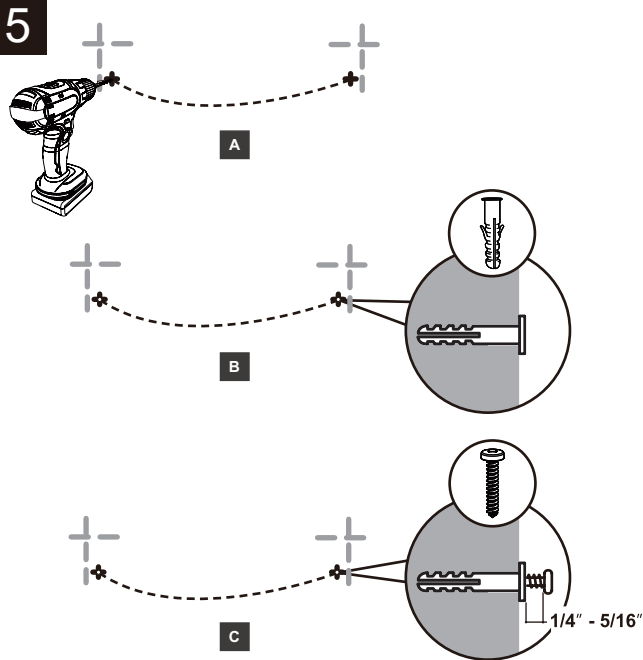

If drilling into wood, drill a 1/8" hole at each marked location (figure A), and install screws into holes. If drilling into concrete, drill a 5/16" hole at each marked location (figure A, B, C), insert wall plugs, and install screws into the wall plugs. Leave a gap of 1/4"-5/16" between the screw head and the wall.

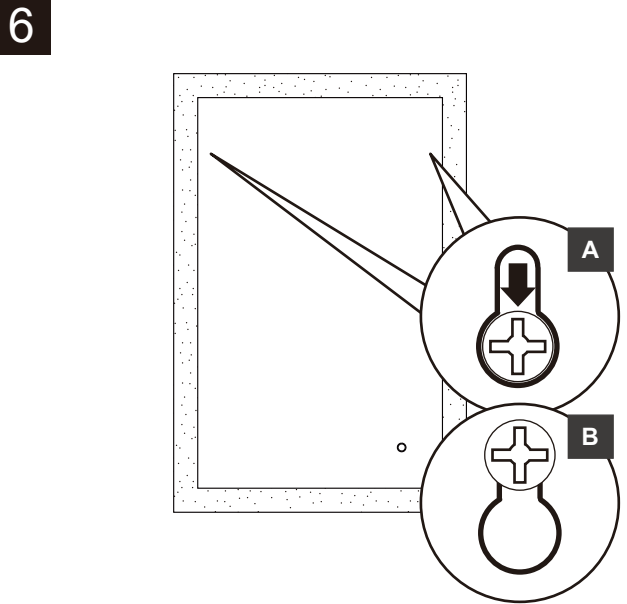

The LED mirror is provided with a power supply cord. For the plug-in connection, place the mirror against the wall and slide down as shown. Then plug the power supply cord into the outlet to finish the installation. For the wire connection, please cut the power supply cord near the plug and connect the wire by following step 7. Then secure mirror by following step 6.

7

WIRING DETAILS

INCOMING SUPPLY	MIRROR WIRING
SWITCHED LIVE ——— L ———	BLACK or LABELED - L
EARTH (GREEN/YELLOW SLEEVED COPPER) ——— ———	GREEN - E
NEUTRAL ——— N ———	WHITE or LABELED - N


LED Mirror Cable

Before starting the wire connection, please make sure the electricity supply has been turned off.

For the wire connection, please cut the power supply cord and strip a section of sheath and insulation from the cable. Connect the neutral (N) and live (L) wires to the mirror's power supply wires, using the Twist-cap Connectors. Connect the mirror's green wire to the grounding wire in the junction box with a Twist-cap Connector. Carefully push the wires into the junction box.


OPERATION

Turn on the power supply before you use the mirror.

 Press this key to turn the LED light on or off. The defogger operates when the LED light is turned on. Press and hold to change the color temperature from 2700-6500k. It will change gradually(2700-6500k).

MAINTENANCE

Wipe clean with a soft damp cloth. Apply glass cleaner to cloth and do not apply directly to mirror. An occasional wiping down with a mild soap diluted in water is all that is needed to keep the mirror and aluminum parts looking new. Never use abrasive cleaners as these could damage the finish or exposed LED strips. Never use scouring powder pads, abrasive material, strong bleach or sharp instruments on metal components or glass. Test products on a small inconspicuous surface prior to use.



ANZZI®