
HYDRAULIC POST TABLE - HT-40-3248-DC

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

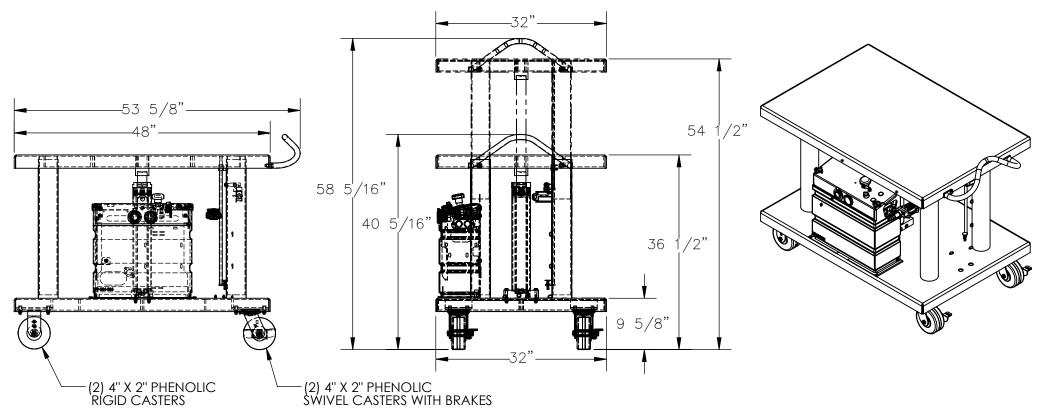

DIMENSION TOLERANCE ± 1/4"

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION

STANDARD FEATURES

MODEL NUMBER IS HT-40-3248-DC MAX CAPACITY IS 4,000 LBS.

OVERALL WIDTH: 32" USABLE WIDTH: 32"

OVERALL LENGTH: 53 5/8"

USABLE LENGTH: 48" RAISED HEIGHT: 54 1/2" LOWERED HEIGHT: 36 1/2"

OVERALL RAISED HEIGHT: 58 5/16" OVERALL LOWERED HEIGHT: 40 5/16"

(2) PHENOLIC RIGID CASTERS
(2) PHENOLIC SWIVEL CASTERS WITH BRAKES

HÝDRAULIC HOSES NOT SHOWN

TOUGH BAKED IN POWDER COATED BLUE FINISH

SPECIAL FEATURES NONE

A P P	REQUIREMENTS. I ALSO ACKNO CONFIRM PRODUCT AND COMPLIANCE WITH ALL APPLIC) INSTALLATION
R O V	AND LOCAL REGULATIONS ANY MODIFIED UNITS ARE [] As drawn [NON-RETURNABLE
Ă	Signed:	Date:
L	Printed Name: LEAD TIME WILL START UPON RECEIPT OF	SIGNED APPROVAL DRAWING
ISTR	IBUTOR'S NAME:	P.O.# X

FOR INTE	FRNAL USE ONLY CT SIGN OFF	DI:
SALES		DE
ENG.		יוט
FAB.		RE
POWER		Q۱

VESTIL MANUFACTURING

W.O.# X RAWN BY: CRH DATE: 3/1<u>1/2020</u> SALES: X FERENCE: X SCALE: 1:18 FILE NAME:

Χ

21-007-149

UOTED LEAD TIME: X QUOTE #