

52 Inch LED Ceiling Fan

(Oil Brushed Bronze)

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____


Product Information

Finish	Oil Brushed Bronze
Blade Finish	Walnut/Cherry

Specifications

Number of Blades	5
Blades Included	Yes
Blade Pitch	13 Degrees
Blade Sweep	52"
Blades Reversible	No
Blade Material	WOOD
Optional Blades Available	No
Downrod 1	1.00 OD X 4.50
Primary Control System	3 Speed Wall Control Ltd Function
Remote Included	No
Wall Control Included	Yes
Low Ceiling Adaptable	No
Lead Wire Length	78.00"
Motor Size	172MM X 20MM
Motor Type	AC

Dimensions

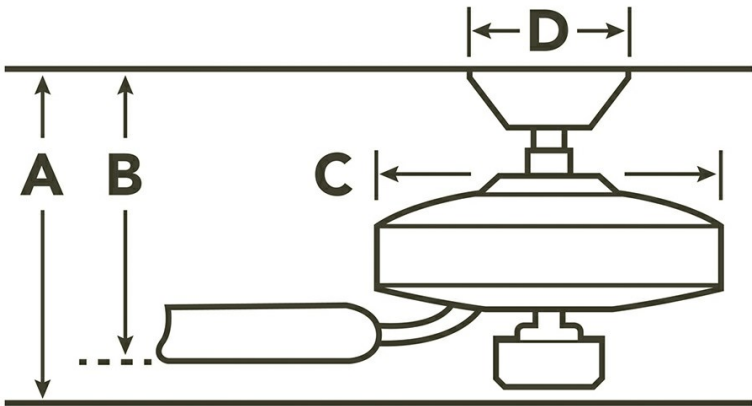

Downrod	A	B	C	D
1.00 OD X 4.50	17.00	13.00	10.25	6.25

Available Finishes

Finish	Fixture	Glass	Blade 1	Blade 2
--------	---------	-------	---------	---------

Downlight

Downlight Included	Yes
Light Source	LED
Downlight Bulb Included	Integrated
Downlight Bulb Type	LED
Number of Lights/LEDs	1
Watts	70/11
Initial Lumens	1600
Glass Description	Etched Cased Opal
Optional Light Kit Available	No
Kelvin Temperature	3000K

Safety Listings & Certifications

Safety Rated	Dry
Warranty	

Installation

The electrical junction box and support structure must be

Notes:
1) Information provided is subject to change without notice.
All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.

52 Inch LED Ceiling Fan

(Oil Brushed Bronze)

Project Name: _____
Location: _____
Type: _____
Qty: _____
Comments: _____

Brushed Nickel		ETCHED CASED OPAL	BLACK	SILVER
Oil Brushed Bronze		ETCHED CASED OPAL	WALNUT	CHERRY
Antique Pewter		ETCHED CASED OPAL	LIGHT CHERRY	BLACK CHERRY

Installation requirements	securely mounted and capable of reliably supporting a minimum of 50 pounds. Use only ETL/UL listed electrical junction boxes marked ""For Fan Support""
Electrical Requirements	120v 60Hz ac
Hanging Weight	25.70 LBS
Minimum Distance Between Bottom Of Fan Blade To Floor	7 feet

Notes:
1) Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions.
2) Incandescent Equivalent: The incandescent equivalent as presented is an approximate number and is for reference only.