



Verdera® | K-99011-TLC

40" x 30" lighted medicine cabinet

Features

- Three-way adjustable soft-close door hinges for easy cabinet access
- Internal LED light guides provide optimally bright bathroom vanity lighting for grooming tasks
- Brightness at 2200 lumens ensures consistent lighting with no hot spots or dark spots. Produces 65 lumens per watt
- Approx. 3000 Kelvin light appearance delivers a neutral light ideal for overall bathroom aesthetics as well as tasks
- Minimum 90 CRI (color rendering index) lets you see yourself in the truest light for makeup application, grooming, and skin care
- Integrated LED bulbs have an estimated life expectancy of 59,000 hours
- Compatible with wall-mount LED dimmers (not included), which allow you to control lighting from multiple locations in the space
- Pivoting side panels allow you to direct light for specific tasks
- Internal aluminum shelf has two electrical outlets for powering small devices such as toothbrushes and shavers
- Front mirror, inside door mirror, and back panel mirror provide superior visibility to make grooming easier
- Nine adjustable tempered-glass shelves



Available Colors/Finishes

Color tiles intended for reference only.

NA NA Not Applicable



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-06-2026 17:09 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

UL 962
CA Title 24 JA8
cUL Listed
UL Listed

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

Technical Information

All product dimensions are nominal.

Lighting Included:	Yes
Mirror Type:	Polished Edge
Cutout	
Width:	40" (1016 mm)
Height:	28-1/4" (718 mm)
Depth:	3-11/16" (94 mm)

Material

- Anodized aluminum construction with a durable rustproof and chip-resistant finish

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Electrical Service


One circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Outlet, Lights: 120 V, 15 A, 60 Hz

Electrical Component Ratings

Outlet:	120 V, 15 A, 60 Hz
LED:	120 V, 0.4 A, 60 Hz, 2200 Lumens



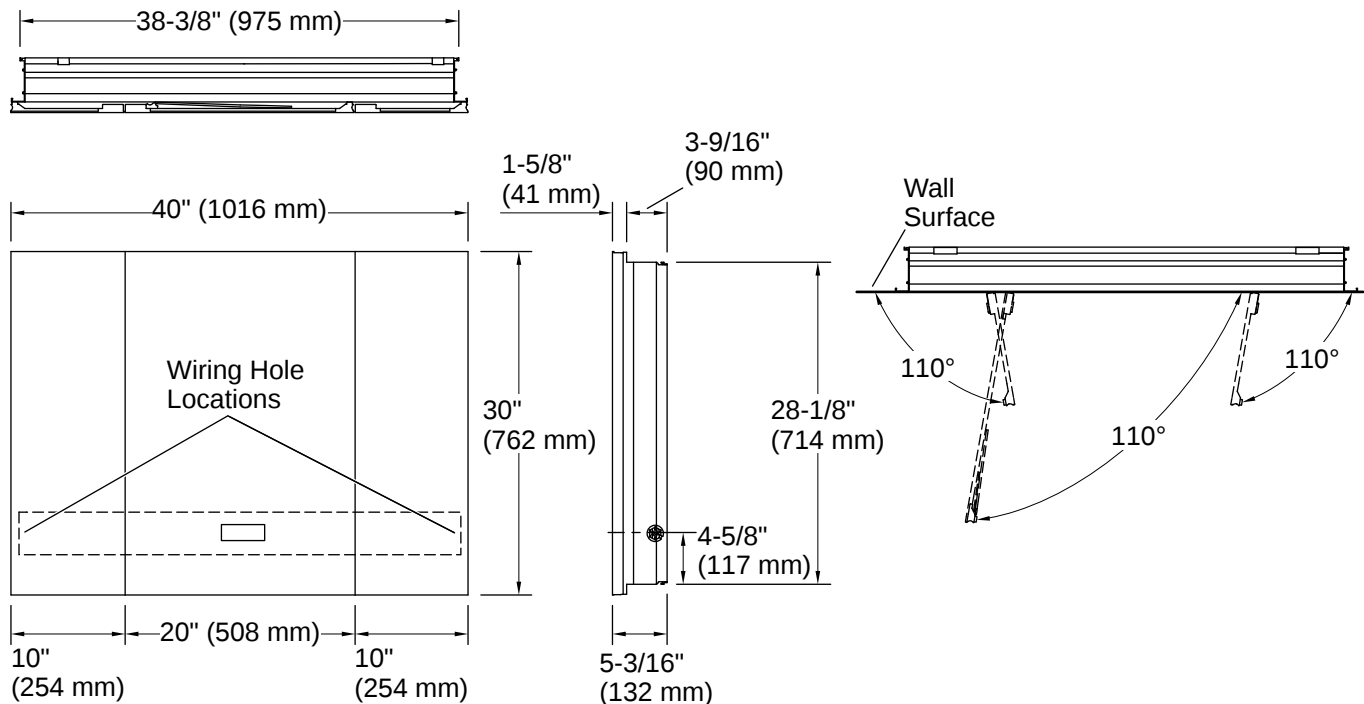

Installation

- Installation with center door hinge on left
- Recommend professional electrician installation
- Side kits for surface-mount installation sold separately
- Hang-and-secure mounting system for easier surface-mount installation
- Includes mounting hardware for surface or recessed installation

Installation Notes

Install this product according to the installation instructions.

To recess mount, the wall cavity must be framed and the cabinet secured to framing studs. Reroute electrical or water supply lines from the cavity. Consult a professional if drain or vent piping is encountered, or if the wall is load-bearing.

To determine the height of the cabinet, ensure the door will clear all obstacles (such as a faucet). A minimum 3" (76 mm) distance is required.

