



Purist® | K-22166

Four-function handshower, 2.5 gpm

Features

- Multifunction showerhead and handshower each have advanced spray engines to provide three experiences: full coverage, pulsating massage, and silk spray
- Full coverage spray produces an encompassing spray ideal for everyday use
- Pulsating massage spray targets sore muscles to ease away aches and pains
- Silk spray releases a dense, luxurious spray ideal for rinsing
- Thumb tab allows for a smooth transition between sprays
- Combination of balance, weight, grip, and angle makes this handshower comfortable and easy to use
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- 2.5 gpm (9.5 lpm) maximum flow rate
- Requires K-8593, K-9514, K-98360, K-98359, K-45981, or K-45982 shower hose (sold separately)
- Coordinates with Purist®, Stillness®, and Composed® faucets and accessories
- Features a nonpositive shutoff: water-saving pause mode to temporarily reduce water flow
- Pause feature temporarily pauses water flow to conserve water while you lather, shave, or shampoo



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
AF	Vibrant French Gold
BN	Vibrant Brushed Nickel
BV	Vibrant Brushed Bronze
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass
TT	Vibrant Titanium



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-10-2026 17:21 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

IMPORTANT: Product meets the Americans with Disability Act (ADA) and ICC A117.1 (specifically section 608.5) if installed properly with an adapter that enables a non-positive shut off. Please see the KOHLER Statement® ADA handshower hose adapter in the recommended products section.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
ADA
ICC/ANSI A117.1
CSA B651
OBC

Technical Information

All product dimensions are nominal.

Flow Rate
Handshower Rated Maximum 2.5 gpm (9.5 l/min)
Flow:

Material

- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23723 Faucet cleaner

Required Products/Accessories


- K-9514 60" metal shower hose
- or
- K-98359 60" smooth shower hose
- or
- K-45982 60" ribbon hose
- or
- K-8593 72" metal shower hose
- or
- K-98360 72" smooth shower hose
- or
- K-45981 72" ribbon hose

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



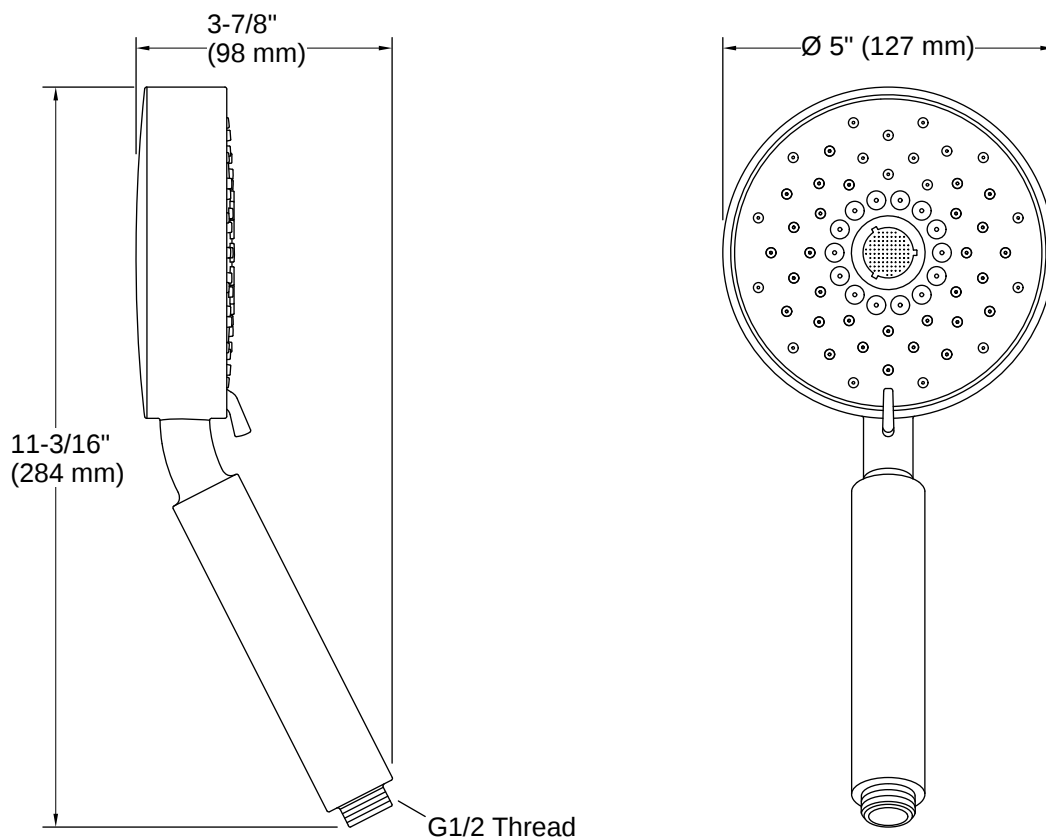

Installation

- Bracket or sidebar required for wall-mount installation
- Deck-mount holder required for deck-mount installation

Installation Notes

Install this product according to the installation instructions.

Plumbing codes require an atmospheric vacuum breaker (such as Kohler Model K-9660) be installed in-line with handshowers. Please consult with local plumbing officials. ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

