

Instruction Manual

CRYSTAL PENDANT

Questions?

E-mail our customer service department

IMPORTANT SAFETY INSTRUCTIONS:

This fixture must be installed by a qualified electrician!
Disconnect the power at the main electrical panel before installation.

This fixture is for indoor use only. The fixture should not be used near water. Never cover the lamp with any object, including cloth or paper as this is a fire hazard. Do not handle the bulb immediately after the light is turned off as it will be hot. This is not a toy. It is recommended that you wear gloves during assembly.

ASSEMBLY INSTRUCTIONS:

1. TURN THE MAIN POWER SUPPLY OFF
2. ATTACH THE MOUNTING PLATE "A" TO ELECTRICAL BOX "B" WITH SCREWS "C".
3. MAKE THE WIRE CONNECTIONS. CONNECT BLACK TO BLACK WIRE AND WHITE TO WHITE WIRE. ATTACH GROUNDING WIRE (HAS A GREEN LINE ON IT) TO THE MOUNTING BRACKET GROUNDING SCREW "D"
4. ALIGN THE HOLES IN CANOPY "E" TO THE MOUNTING PLATE "A", AND SECURE THE CANOPY WITH THE 2 SCREWS "F"
5. INSTALL BULB. ONLY USE BULBS OF SPECIFIED TYPE AND MAXIMUM RATED WATTAGE OR LESS. SECURE SHADE "G" TO THE SHADE HOLDER "H" WITH THREADED BOLTS "I"
6. TO CHANGE THE BULB HOLD ONTO SHADE "G" AND REMOVE THREADED BOLTS "I" TO RELEASE THE SHADE. REPEAT STEP 5 TO PUT THE SHADE BACK ON.

NOTE: THE FIXTURE HEIGHT CAN BE ADJUSTED BY PUSHING IN THE PIN (#1) AND SLIDING THE STEEL CABLE (#2)

CLEANING & MAINTENANCE:

BULB REPLACEMENT

Disconnect the power before replacing bulb.

TROUBLESHOOTING

1. If lamp does not light, check the bulb for a broken filament.


Replace bulb if necessary.

2. If the external flexible cable or cord of this fixture is damaged, it must be replaced by a qualified electrician in order to avoid a hazard.

MAINTENANCE

1. To clean, use a soft cloth only.

2. Do not use any chemical or abrasive cleaners. threaded bolts "I" to release the shade. Repeat Step 5 above to re-attach the shade.

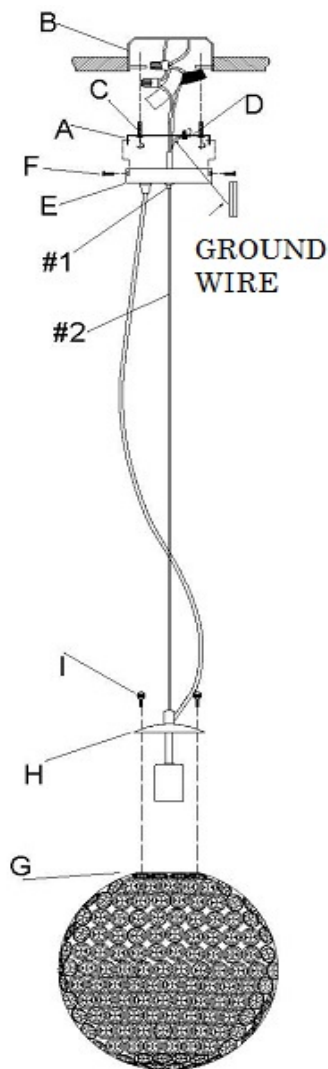

REQUIRES:

1- 60W MAX MEDIUM BASE
TYPE A BULB (NOT INCLUDED)

LIMITED WARRANTY
