

SPECIFICATIONS:

DESCRIPTION

Flush-mounted ceiling fixture, featuring Opal Matte glass diffuser.

LAMPING

LED: 16W Integrated source, 120V, dimmable, 85+ CRI, 3000°K CCT, 1600 lumens, 30,000 hours, included. (Aura 12 only)

LED: 20W Integrated source, 120V, dimmable, 85+ CRI, 3000°K CCT, 2200 lumens, 30,000 hours, included. (Aura 16 only)

DIFFUSER

Handcrafted glass diffuser in Opal Matte.

12.5" Dia. x 4" H

16" Dia. x 4.5" H

CONSTRUCTION

Glass diffuser is secured to fitter with "twist & lock" bayonet action. Stamped aluminum fitter.

MOUNTING

Installs directly to a 4" octagonal outlet box, centered on fixture.

90°C supply wire required for incandescent lamping.

LABELS


UL or ETL Listed. Suitable for Damp Locations (interior use only).




OPAL MATTE

Project Information:

ORDERING:

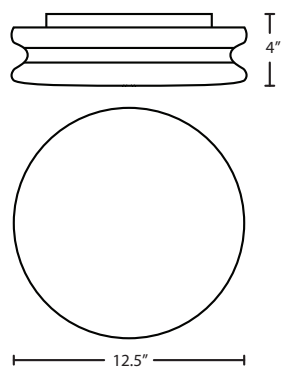

FIXTURE OPTIONS	-	LAMP OPTIONS
12.5" Opal Matte		16W LED 1600 lumens

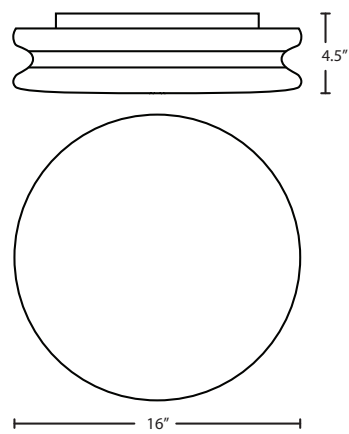

FIXTURE OPTIONS	-	LAMP OPTIONS
16" Opal Matte		20W LED 2200 lumens

Ex. Ceiling, Opal Matte
Shade

Project Information: