
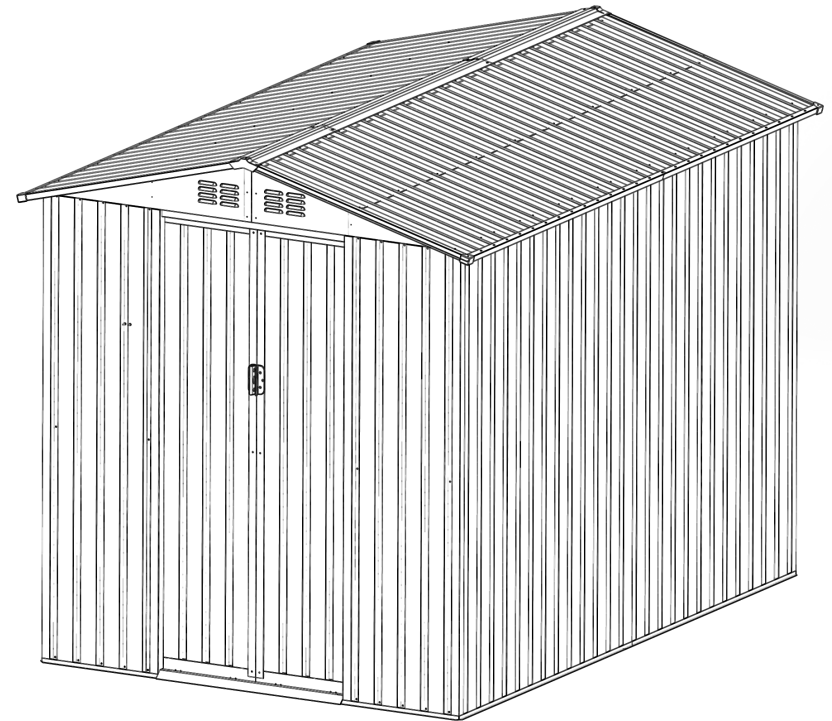


Metal Garden Shed

OWNER'S MANUAL

Size 6 Ft X 9 Ft

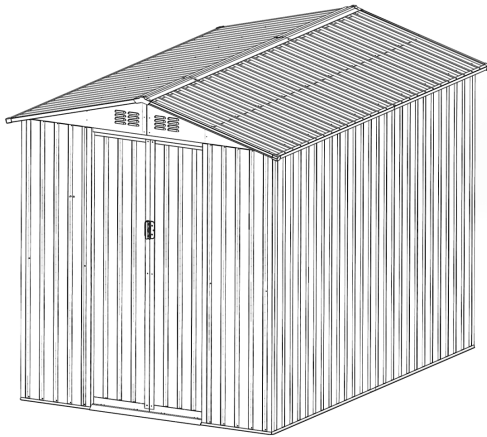

Tall walk in Shed

Quick & Easy Assembly

Ridge Reinforced walls

Wide Double Doors

Available in Various Sizes

Take care of sharp edges;

Please wear gloves;

It will take 2 people 4 - 5 hours to install.

Introduction

Thank you for purchasing our storage rack.
For safe and proper use, please be sure to read this manual before use.

Improper use may result in serious accidents.
Please read and understand this manual thoroughly before use.
Additionally, be sure to read the warnings and precautions on every page.

The product you purchased was manufactured under our strict quality control standards. However, due to factors such as vibration during transportation, the product may become loose. Please inspect the item upon receipt to ensure it is in proper condition. At that time, please accept the instruction manual and keep it in a safe place. For use by children, guardians must read the manual and provide guidance.

Please read carefully before assembly

The following information contains important instructions for the safe use of storage racks. Please read carefully and use correctly.
Failure to comply with the instructions herein may result in serious personal injury, including customer injury, as well as property damage such as product damage.

Product Specifications

- Due to the product's characteristics of assembling components at the installation site, some gaps (light leakage) may occur.
- Due to the product's design, it is not completely waterproof. Water may enter through gaps between components.
- Due to the issues mentioned above, please be aware that dust, insects, rodents, and other small animals may enter, or powdery snow may be blown in.
- Transportation may cause damage to the painted surface. Minor scratches will be addressed using touch-up paint.

FOR YOUR SAFE USE



Note


Regarding Installation Location

Avoid installing in areas where significant snow accumulation or rainwater runoff occurs beneath the roof, as this may cause damage, deformation, and leaks.

- Avoid installing in high places such as rooftops or locations with significant height differences like cliff edges, as there is a risk of tipping over or falling due to strong winds.
- Do not place items on apartment railings or other locations that could block evacuation routes or where crossing the railings could cause children to fall or objects to drop.
- Avoid installing equipment near the vent outlet of water feeders where highly corrosive gases may be emitted, as the exhaust gases may cause coating deterioration and rust/discoloration.
- Leaves and debris near the base of the tree may clog the rain barrel, potentially causing leaks or corrosion.
- On lawns or uneven, uncompacted surfaces, nails may become loose over time.
- Near the property line. (Factors such as rainwater runoff, splashback, snow accumulation, and sunlight obstruction affecting neighbors must be considered.)
- Areas with soil or similar materials on the ground are susceptible to moisture, which may lead to condensation and mold growth.
- In areas where the ground freezes, door installation may become difficult.
- Areas exposed to pharmaceuticals and deicing agents may experience discoloration or corrosion of the main body.
- In areas with high salt content (such as coastal regions), the main body of the storage box may corrode. It is recommended to wash it with water regularly.
- If adjacent to a building, ensure the roof width and the designated space required for assembly and construction.

Precautions for Assembly and Construction

- Before assembly, place the assembly area on a level surface. Perform grounding procedures simultaneously.

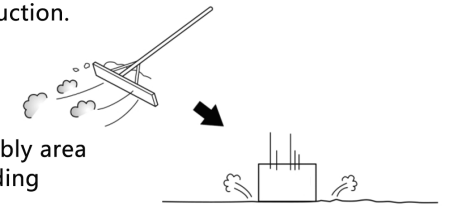

Instruction

FOR YOUR SAFE USE



NOTE

- Please wear protective equipment such as gloves, long-sleeved shirts, and overalls for assembly work. Although we do our best, you may get injured at the corners or ends of the parts.
- When assembling or transporting heavy objects (especially those over 30kg), please be sure to have two or more people on the line. Injuries or low back pain may occur.
- If the assembly is interrupted and left unattended, parts may be scattered or toppled due to strong winds. If you have to leave the site, secure the parts with support columns or ropes.
- Construction should be avoided on windy days. Parts may be damaged by a drop or injured by flying parts.
- To prevent tipping, be sure to carry out the prescribed foundation work. In the event of strong winds such as typhoons, it is possible to fall and cause serious injury or damage to the storage.
- After assembly, please confirm that the bolts are not loose or you forgot to install the accessories. If it is not assembled correctly, the specified strength will not be ensured.



Instruction

Precautions for use

- Do not place objects on the roof, climb, hang, jump from other buildings, etc. Injuries or damage may occur due to falls or falls, etc.
- In the event of strong winds such as typhoons, the door may open or fall off, so be sure to lock it. Contents may be blown off, damaged, or tipped over.
- Please refrain from overexertion. Although it is a solid column structure, the door posts can be deformed or injured.
- Do not use for non-storage purposes (e.g. playgrounds, part of housing, etc.). This can lead to accidents.
- Do not place items on the roof or walls. There is a risk of injury if it is blown down or blown away by strong winds. In addition, if there are scratches on the painting, it will also cause rust.
- Lockers can get hot due to direct sunlight. Be careful with burns.
- Please note that wet shoes or floors such as rain and snow are prone to slipping.

ASSEMBLE

General Steps


Please read these instructions carefully before assembly to understand the assembly method and precautions. Please fully understand the relevant contents.

Open the carton and compare it with the described and illustrated parts to make sure all the parts are complete, carefully identify and confirm

Precautions

- The location of the cottage must be level. If the surface is uneven, the location of the part hole may be eliminated.
- It is recommended that you secure your cabin.

Recommended Tools


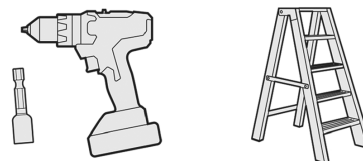


Safety Precautions

Some parts may have sharp edges. Gloves are recommended for handling these items, gloves are recommended when wearing safety glasses, and safety shoes are recommended.

Don't build a cabin in a windy environment. Soon after the cottage was built, it was ensured that it was firmly anchored to a solid foundation. It is advisable to build a hut with multiple people.



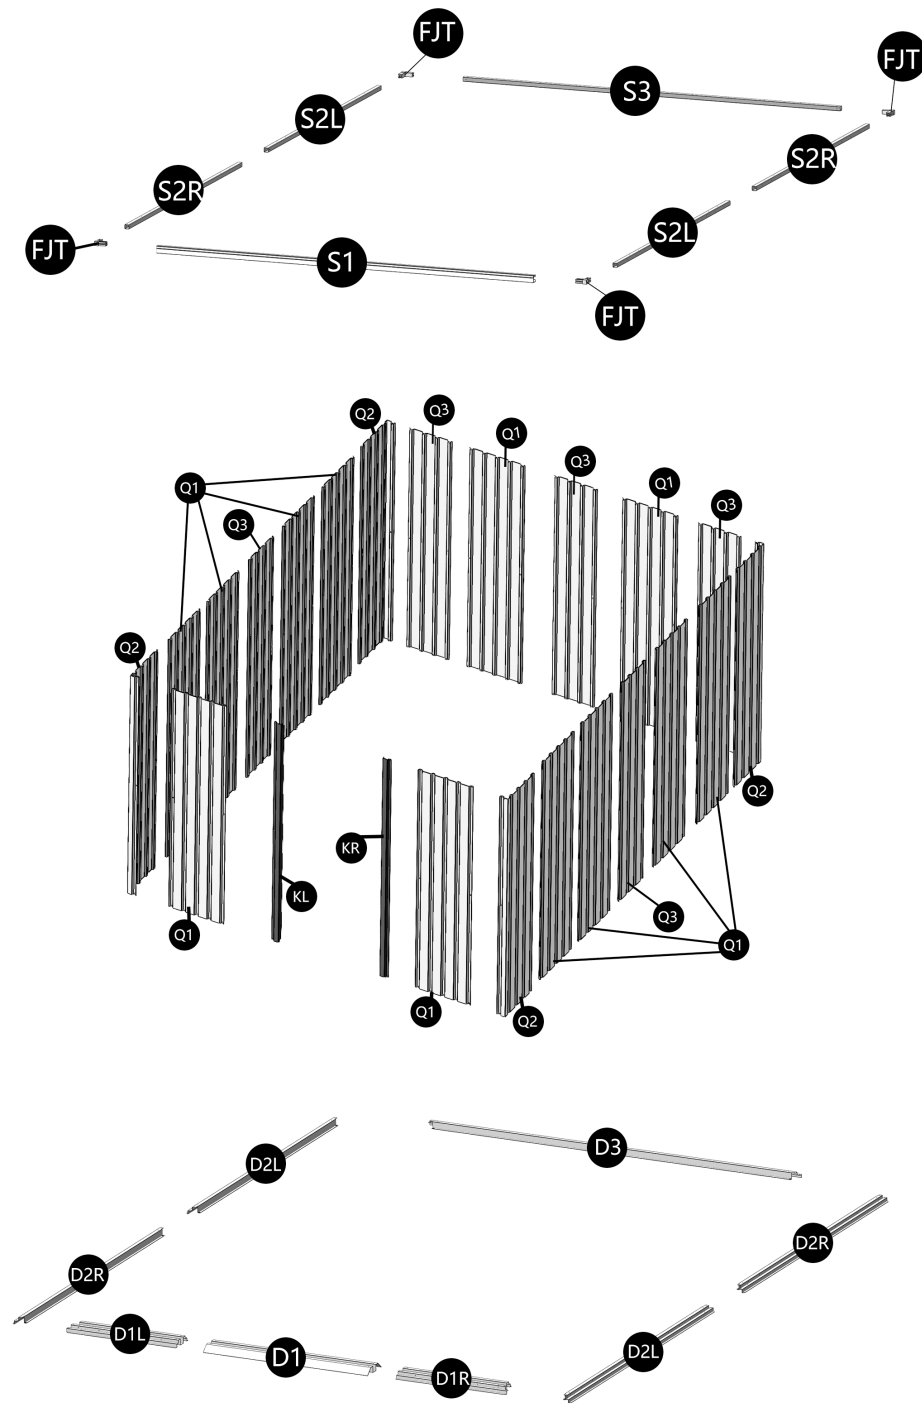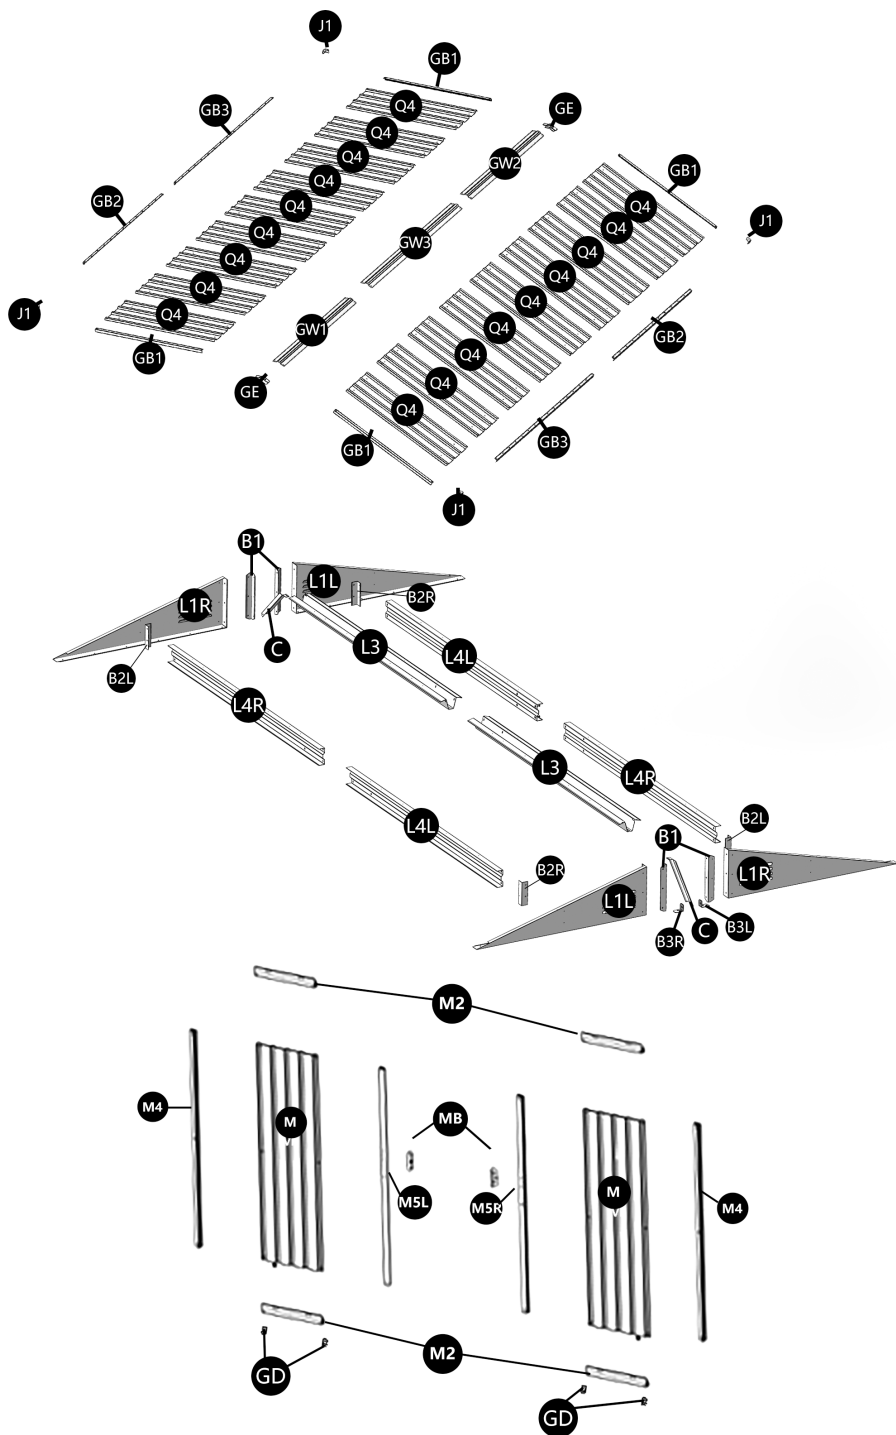

PARTS LIST

NO.	PART	QTY
D1		1
D1L		1
D1R		1
D2R		2
D2L		2
D3		1
S1		1
S2R		2
S2L		2
S3		1
KL		1
KR		1
L1L		2
L1R		2
B1		4
B2L		2
B2R		2

NO.	PART	QTY
C		2
L3		2
L4L		2
L4R		2
GB1		4
GB2		2
GB3		2
GW1		1
GW2		1
GW3		1
M2		4
M3		4
M4		2
M5L		1
M5R		1
Q1		12
Q2		4

NO.	PART	QTY
Q3		5
Q4		18
M		2
J1		4
MB		2
FJT		4
GE		2
GD		4
G2		4
B3L		1
B3R		1
F1		392
F1-1		4

PARTS LIST


NO.	PART	QTY
F3		24
F11		25
F14		300

NO.	PART	QTY
F4		12
LSM		75


NO.	PART	QTY
F8		8

Install LSM at screw exposure, Prevent collisions.


This accessory is used in conjunction with external screws (F1 and F3), located on the outside for sealing and waterproofing.




If there is slight bending on the corners



Pls wear gloves and stretch the corners slightly until they are flat



Then the sheets will be normal and there is no effect to the assembling

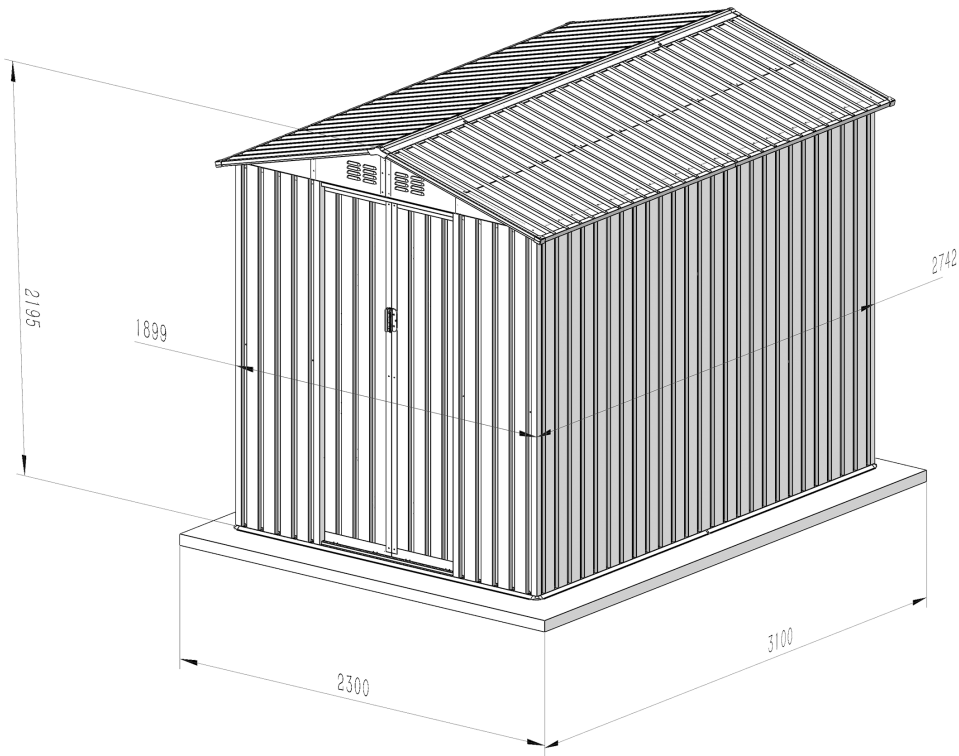

Note: Take care of sharp edges.


All panels are clearly marked and care should be taken to use the correct one. It is important that these instructions are followed step by step.

NO.	PART	Qty.
D1		1
D2L		2

NO.	PART	Qty.
D1L		1
D3		1

NO.	PART	Qty.
D1R		1
F1		16

NO.	PART	Qty.
D2R		2
F1-1		4




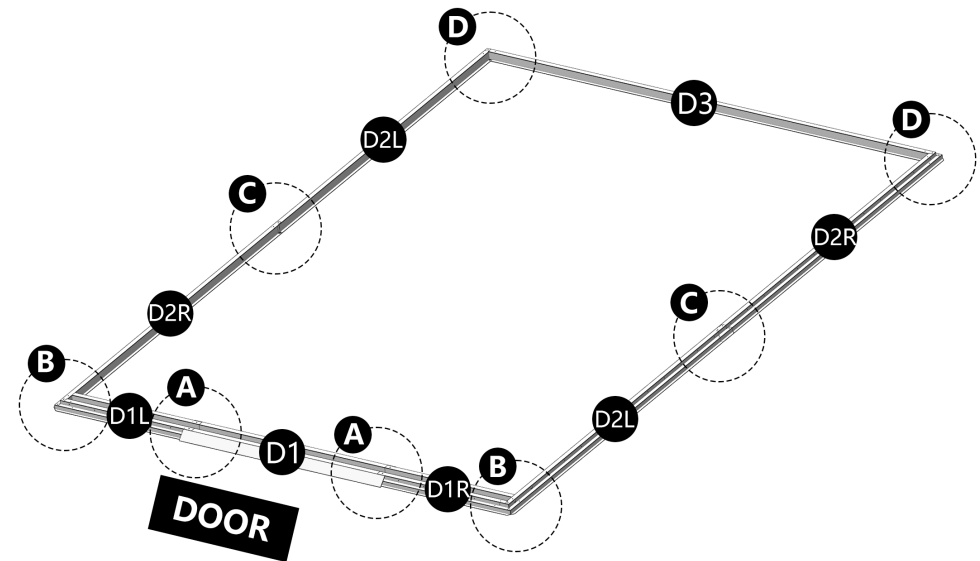


Assemble the components according to the positions shown in the diagram.

Secure step A using F1-1. Secure steps B, C, and D using F1.




The installation space should be flat, and at least 2300x3100mm. The foundation is fixed on the ground in this space.






Note: Please wear gloves


NO.	PART	Qty.
F8		8

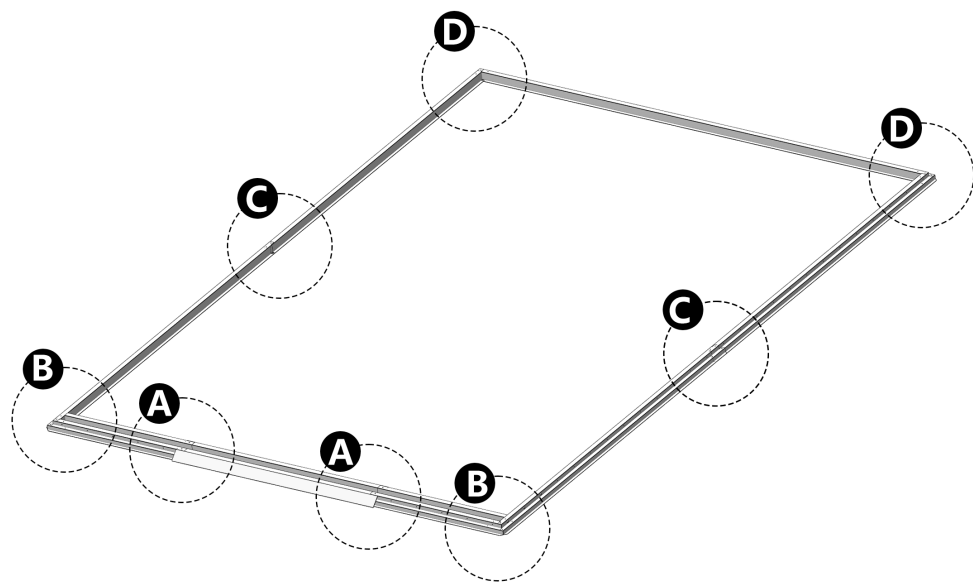

After securing the foundation frame, if the ground is soil, use F8 to fix the holes at steps A, B, C, and D.

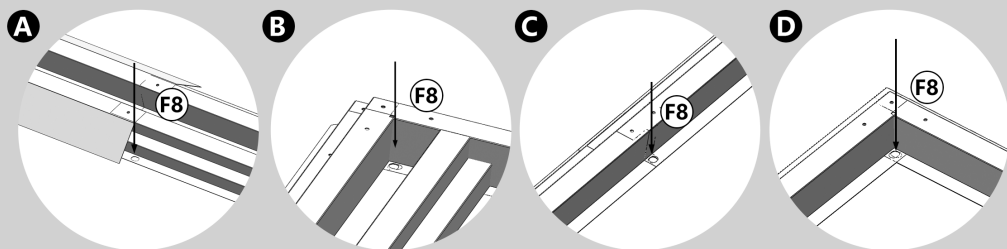


NO.	PART	Qty.
Q2		4
F1		12

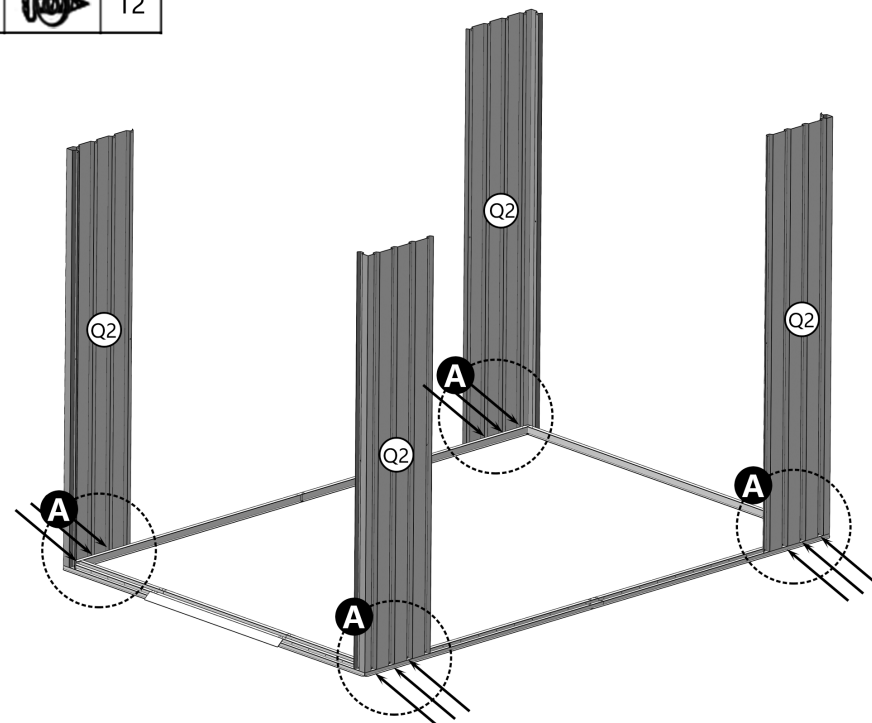


Notice:


In this step, only the three holes in the middle of Q2 need to be installed and reserved on both sides. The reserved holes are shared with the following steps.




NO.	PART	Qty.
S1		1
G2		4

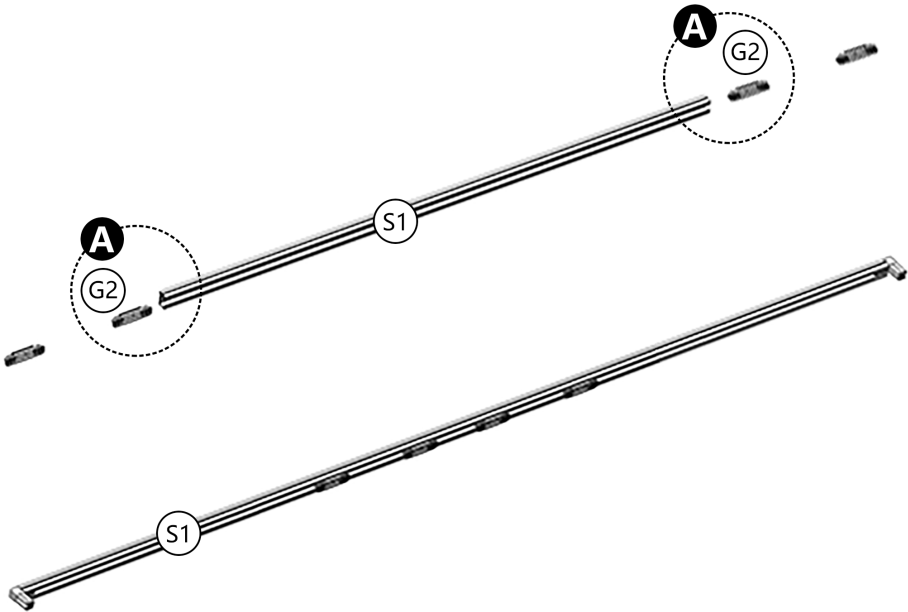


Notice:
G2 has been placed in the S1 before delivery. If it slides out, follow Step A to insert it




NO.	PART	Qty.	NO.	PART	Qty.	NO.	PART	Qty.
S2R		2	S3		1	F1		8
S2L		2	FJT		4			

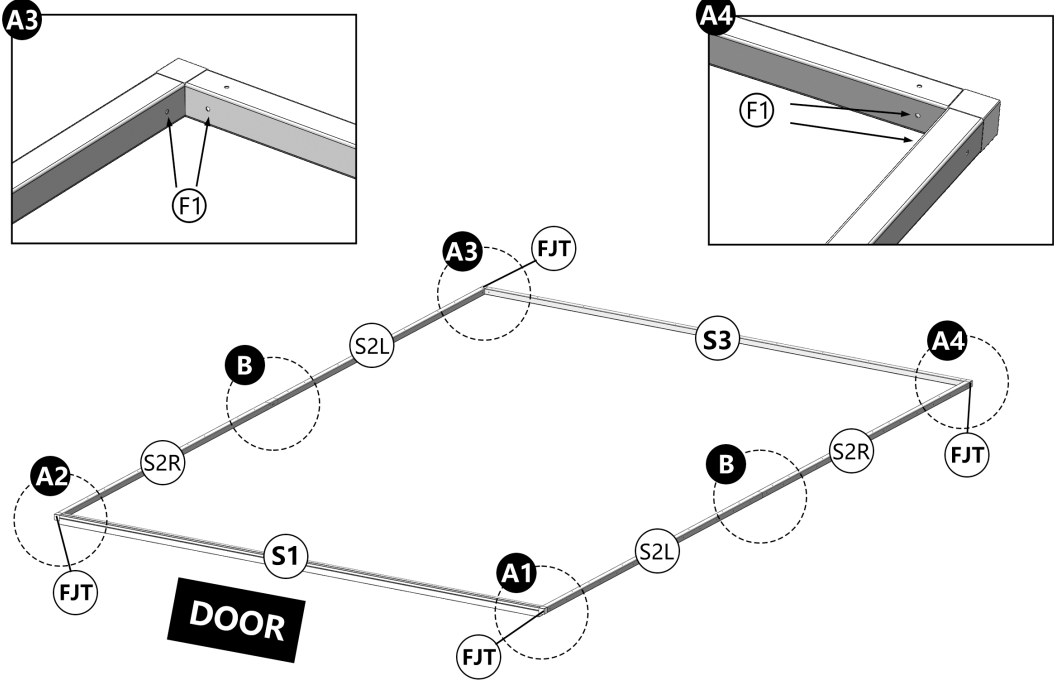

Assemble the accessories according to the positions shown in the diagram, and then use F1 to secure the indicated position in the figure.

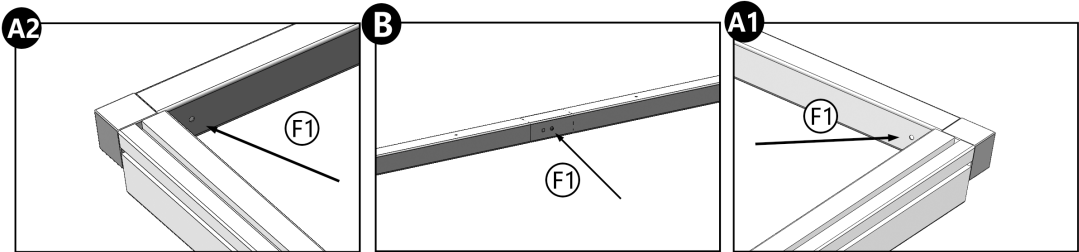


NO.	PART	Qty.
F1		12




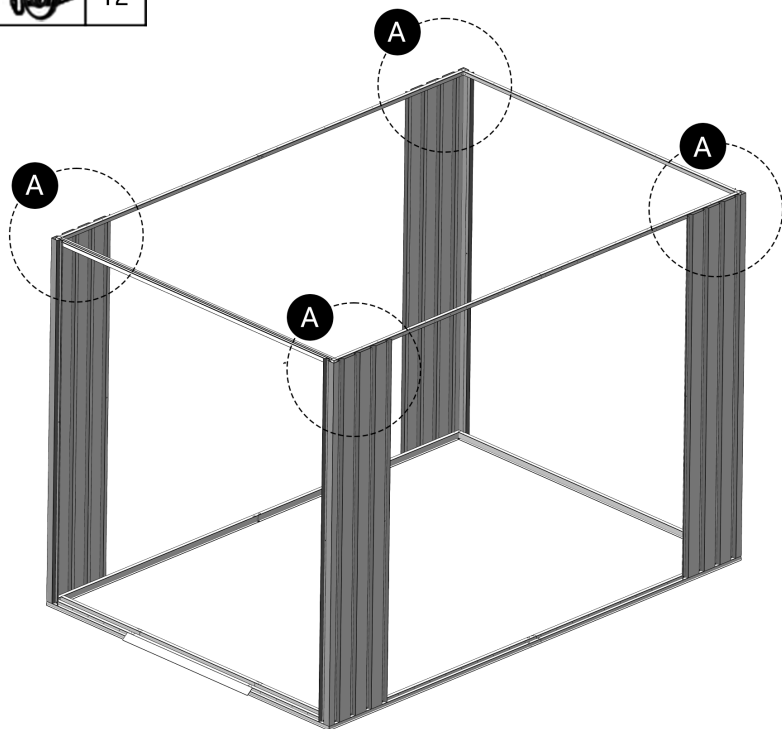


Notice:
In this step, only the middle three holes need to be installed, and both sides need to be reserved.
The reserved hole is shared with other steps.
The walls are tiled on the outside and framed on the inside


NO.	PART	Qty.
Q1		12
Q3		5
F11		23
F1		156

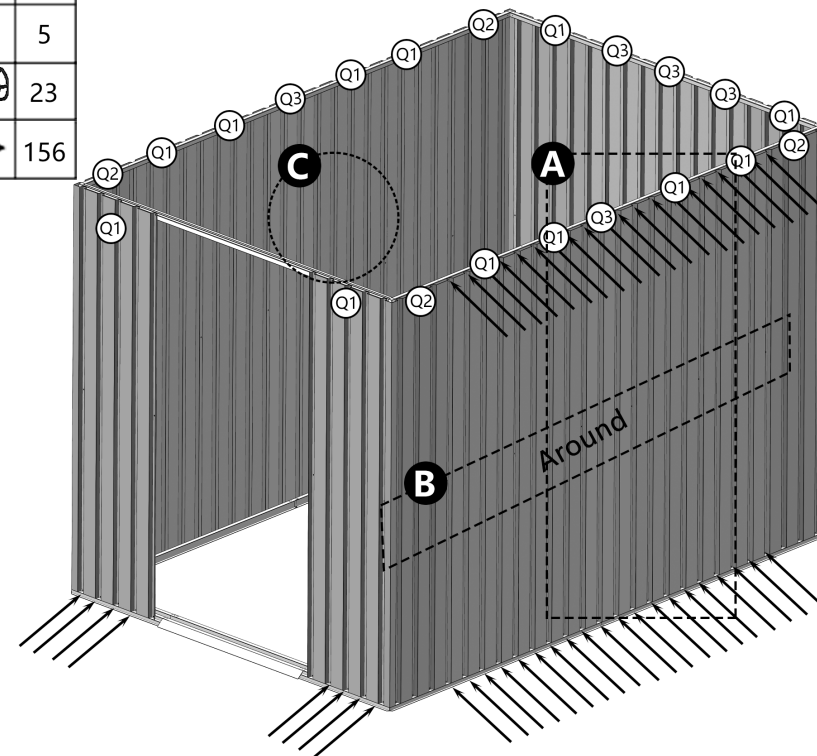

Notice:
As shown in the picture, assemble the wall tiles in turn, Q1\Q3, The top, middle and bottom of the wall tiles need to be screwed,
The upper and lower ends are fixed with F1, and the middle is fixed with F11.



NO.	PART	Qty.
KL		1
KR		1
F1		4
F11		2

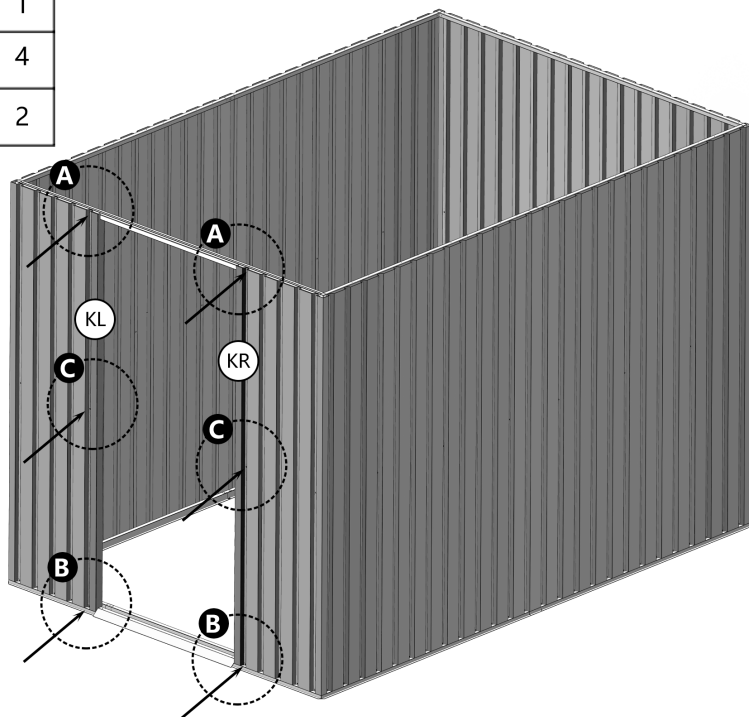


Notice:

As shown in the picture, the steps of door frame and wall tile installation are the same.


The upper, middle and lower parts of KR and KL need screws.

The upper and lower ends are fixed with F1, and the middle is fixed with F11.

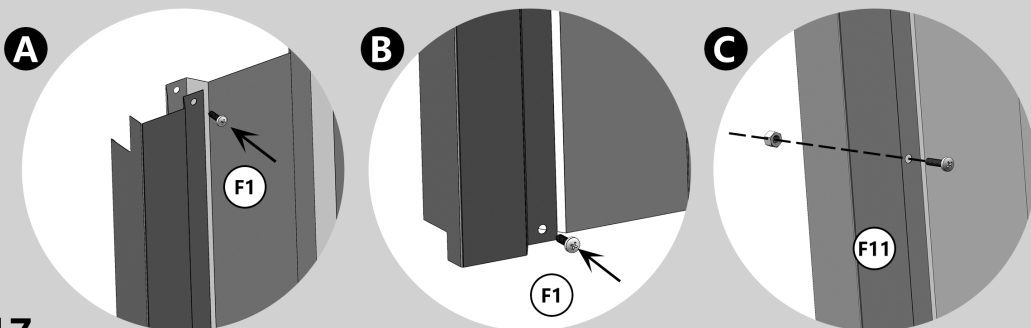

NO.	PART	Qty.
B1		4
B2L		2
B2R		2
L1L		2
L1R		2

NO.	PART	Qty.
F3		2
F1		10

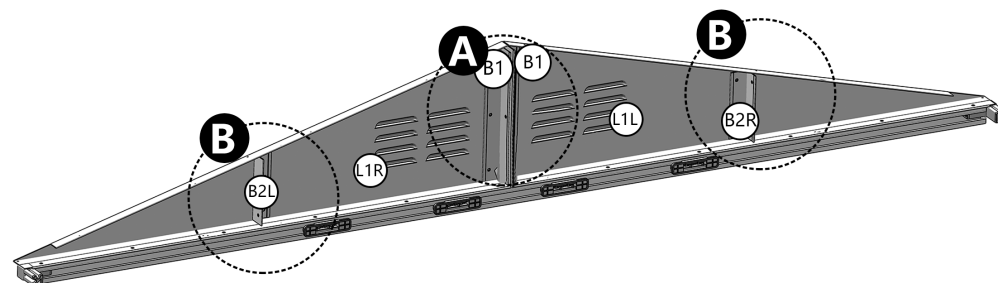


Notice:

B1 has holes on both sides, and the large holes are 2 B1s, L1R, and L1L joined together.


The small holes are 2 B1s connected to L1R and L1L respectively.

B2R and B2L have holes on both sides, and the large holes are B2R and B2L connected to L4L and L4R.


The small holes are B2R and B2L, which are connected to L1R and L1L respectively.

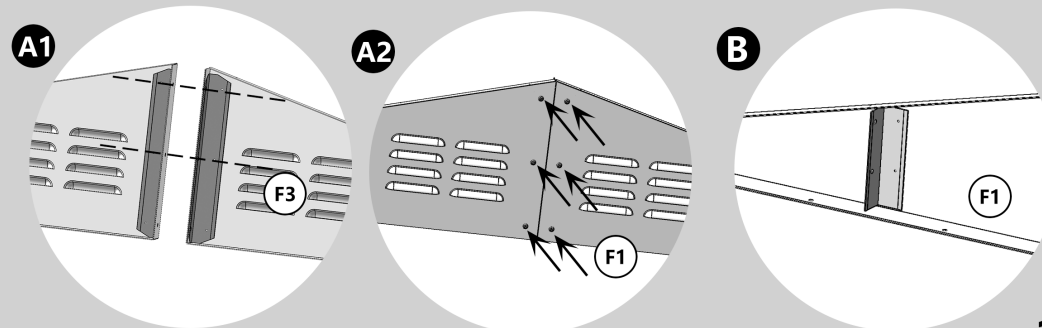


NO.	PART	Qty.
F1		24

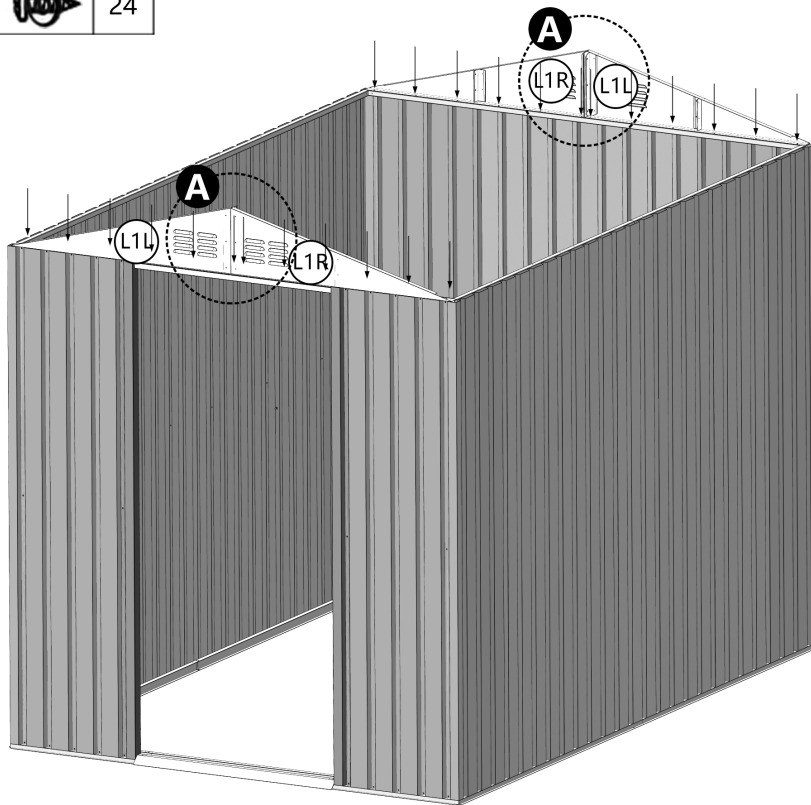


Notice:
The assembled roof support parts are successively installed on the wall tiles with F1

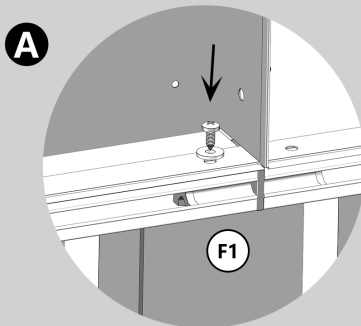

NO.	PART	Qty.
C		2
F3		2
B3R		1
B3L		1

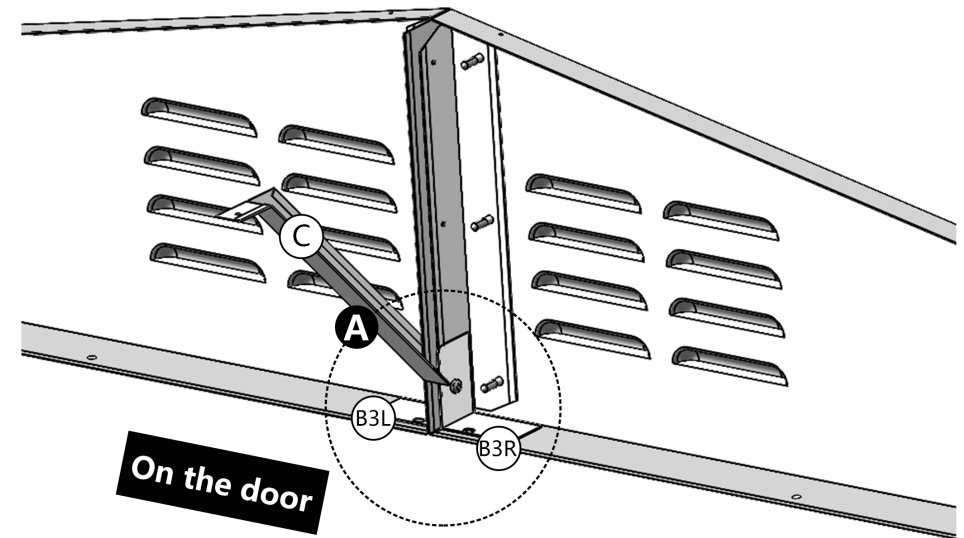


Notice:
Connect C with 2 B1, L1L, L1R, B3L and B3R and fix them with F3;
After completing step A, bend the other end of C about 45° and connect it to the bottom of L3.




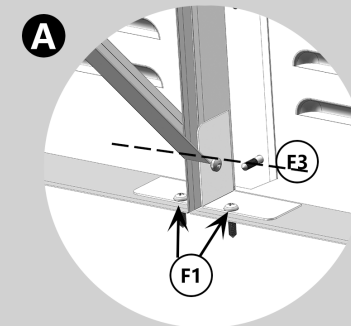


NO.	PART	Qty.
L3		2
L4L		2
L4R		2


NO.	PART	Qty.
F3		22
F1		2

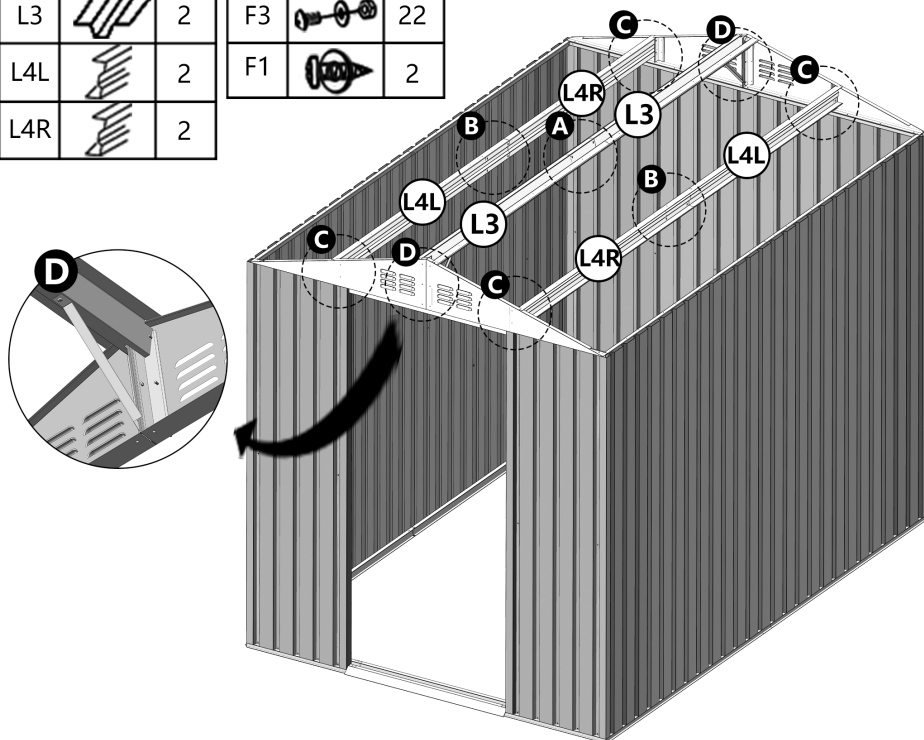




- A. First, assemble L3 and secure it with F3.
 B. Assemble L4L and L4R together and secure them with F3.
 C. Place the assembled accessories in the position shown in the diagram and secure them with F3.
 D. Use F1 to secure C to L3.



NO.	PART	Qty.
Q4		18
F1		108

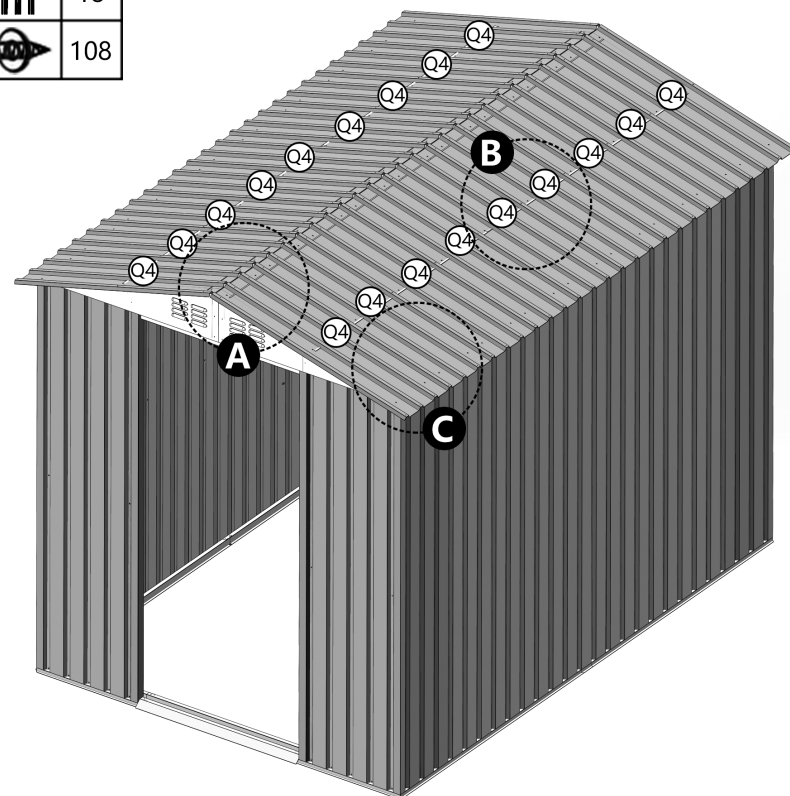


Notice:
 Install Q4 in sequence, overlap between every 2 pieces, and each Q4 needs 3 rows of F1 fixed.

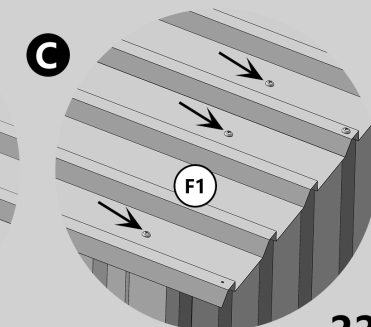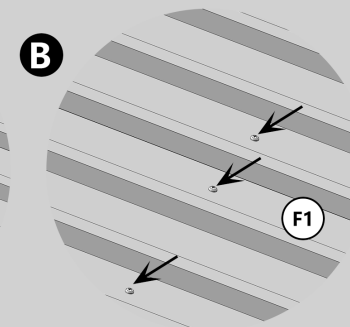

NO.	PART	Qty.
GB1		4
GB2		2
GB3		2

NO.	PART	Qty.
F1		20
J1		4

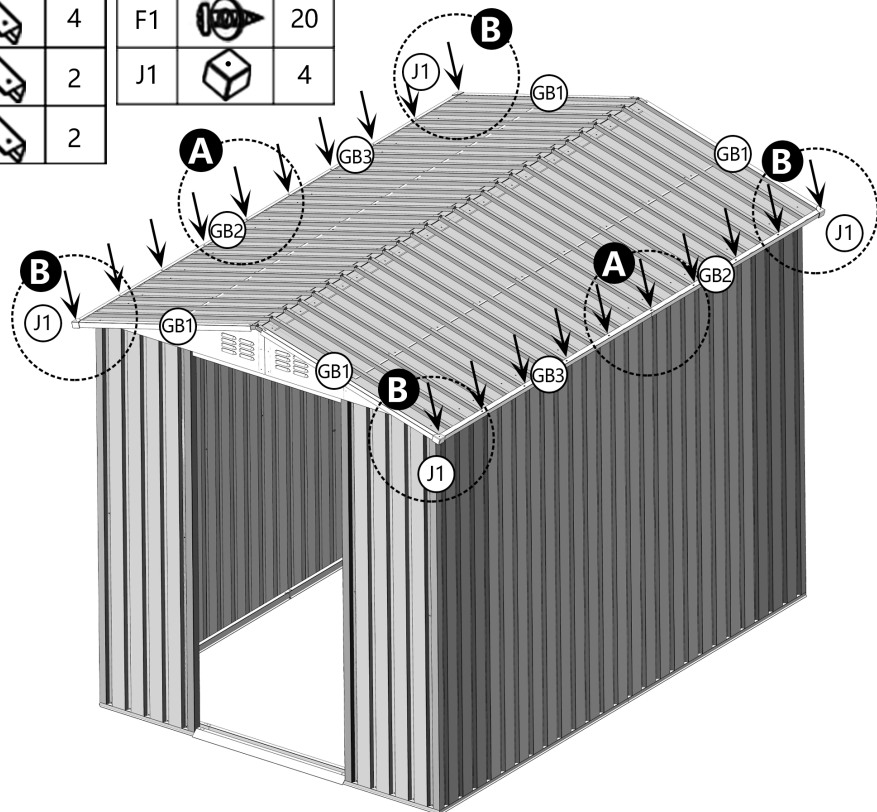


Notice:

Step A: Use F1 to secure GB2 and GB3 to the positions shown in the figure.

Step B: Place GB1 and J1 in the positions shown in the figure and use F1 to secure them to the tiles.

NO.	PART	Qty.
GW1		1
GW2		1
GW3		1

NO.	PART	Qty.
GE		2
F1		12




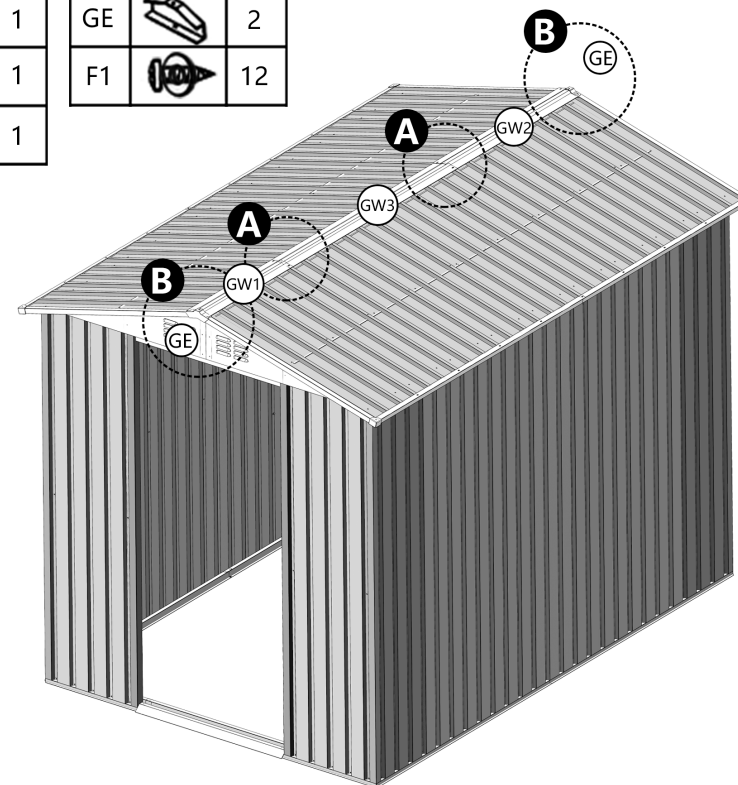


Notice:



Step A: GW1, GW2 and GW3 are fixed at the top with F1.

Step B: GE is fixed at both ends with F1.



① Description: The holes on the most sides are shared by GW1, GW2, GW3, Q4 and GB1.

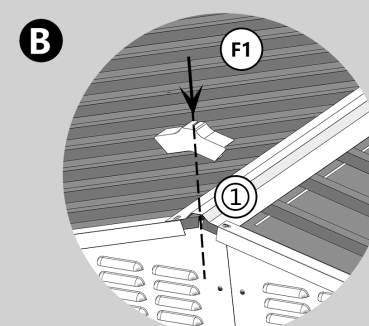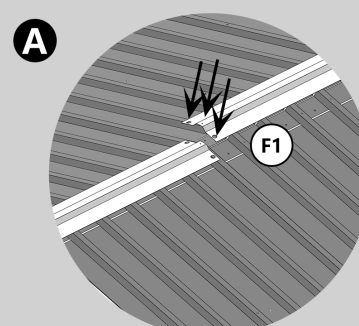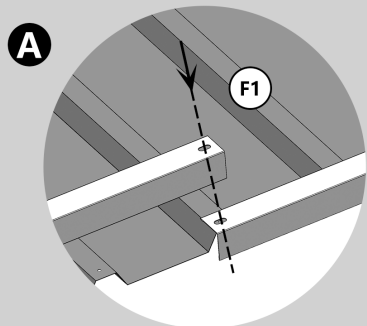



NO.	PART	Qty.	NO.	PART	Qty.	NO.	PART	Qty.	NO.	PART	Qty.
M2		4	M5L		1	M		2	F3		4
M3		4	M5R		1	GD		4	F4		12
M4		2	MB		2	F1		6			

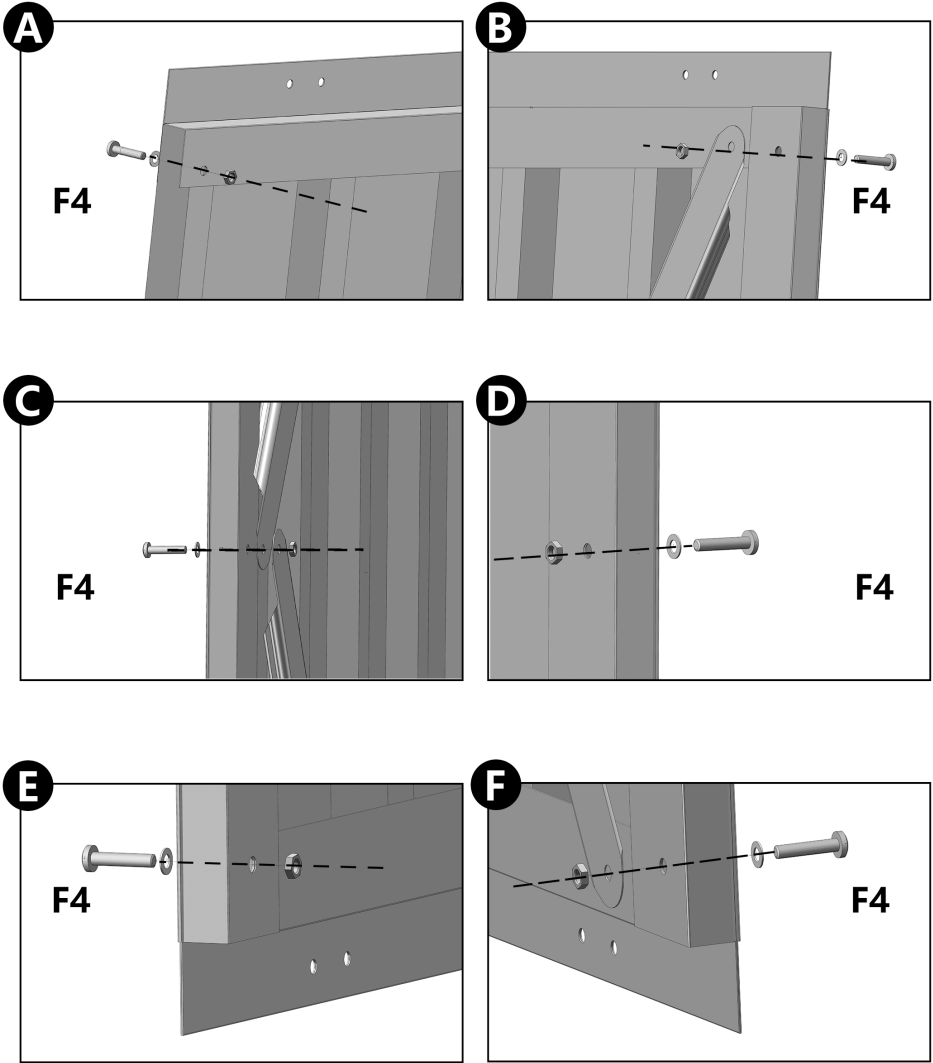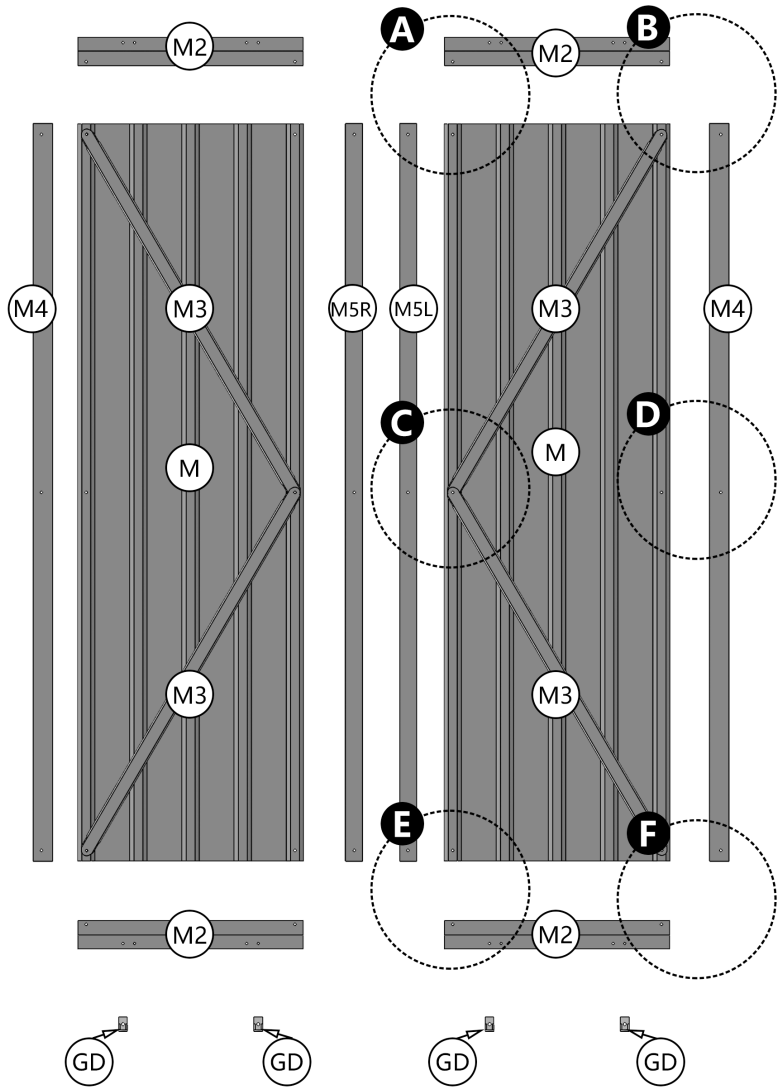


NO.	PART	Qty.
F1		3
F3		2
F4		6

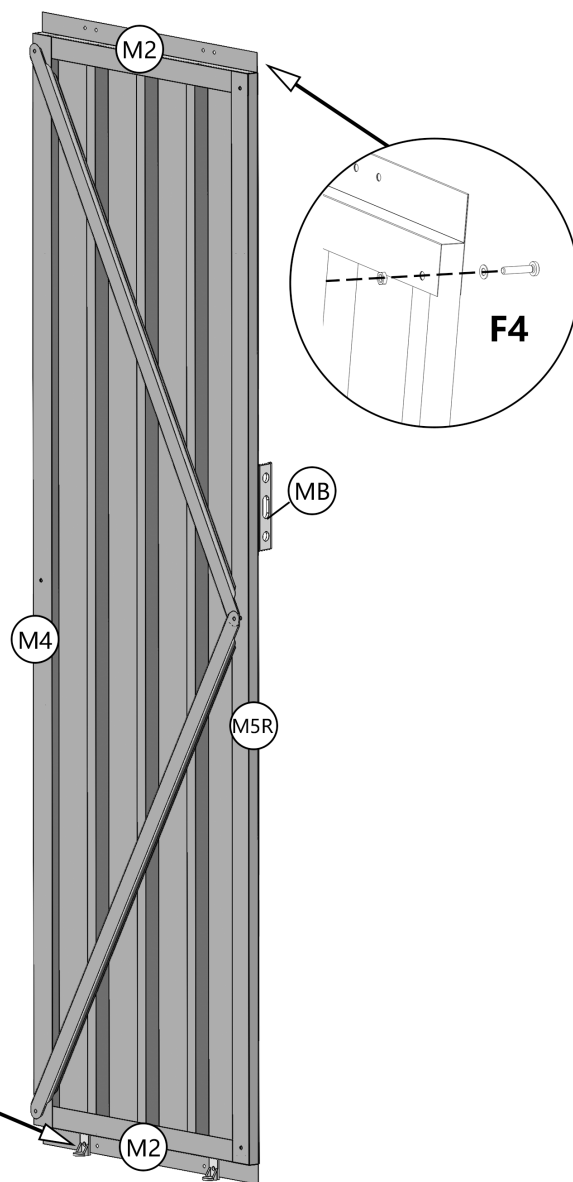

NO.	PART	Qty.
F1		3
F3		2
F4		6

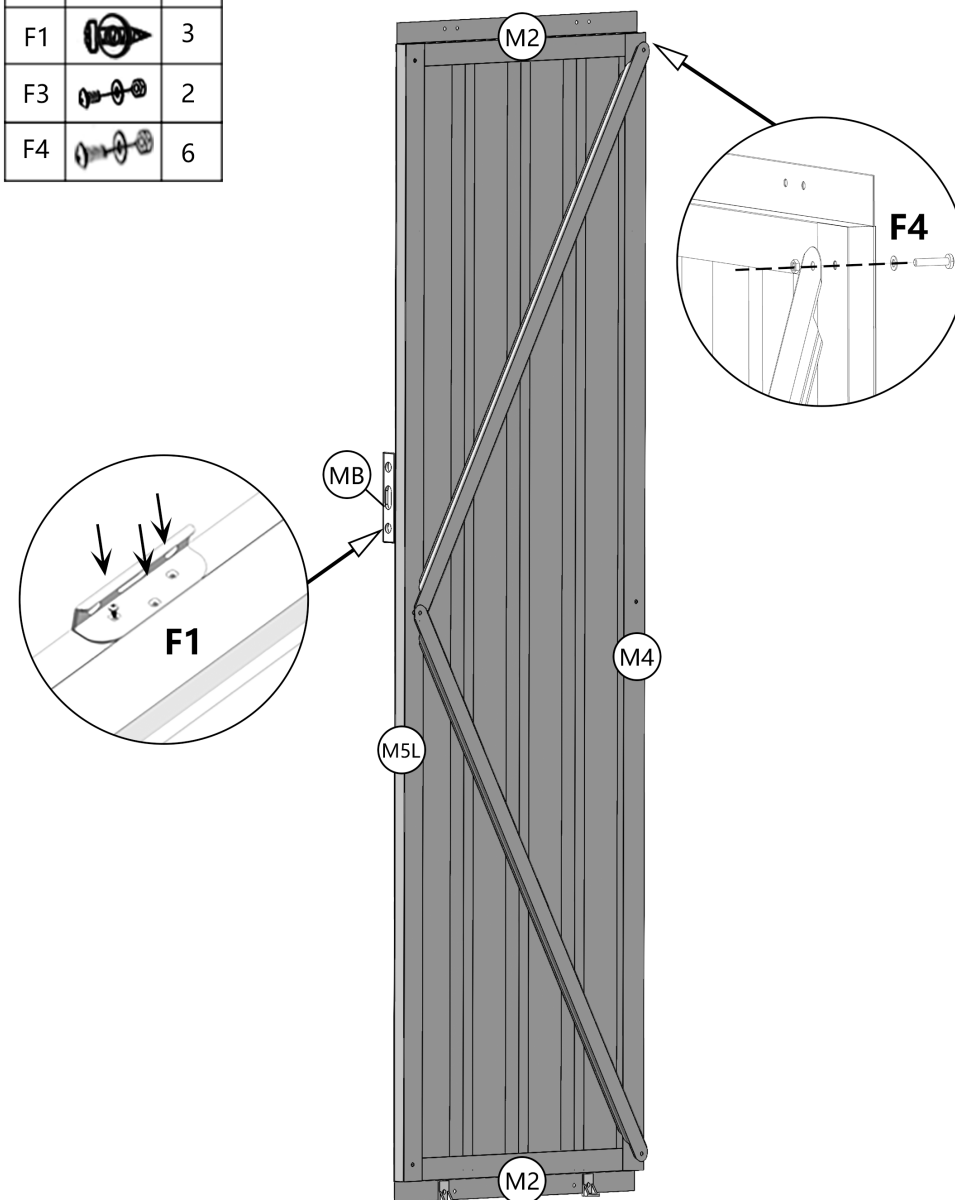

NO.	PART	Qty.
F1		8

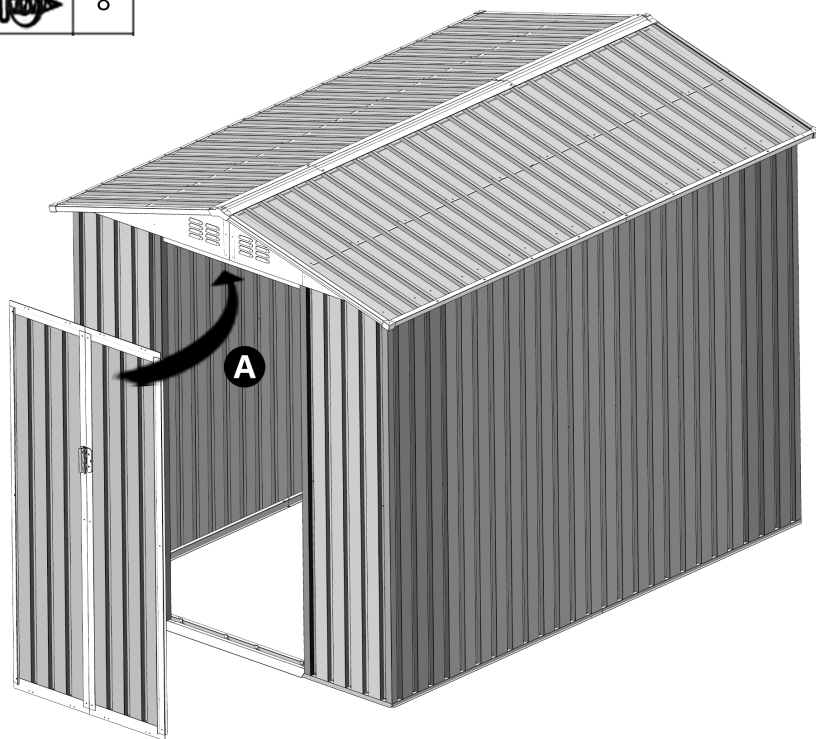

Notice:

Use F1 to secure the installed door to the pulley

The adjustment of the door can be achieved by the three holes of the pulley being at different heights

