



Date: \_\_\_\_\_ Project: \_\_\_\_\_  
Fixture Type: \_\_\_\_\_ Specifier/Rep: \_\_\_\_\_



3cm (1 3/16")

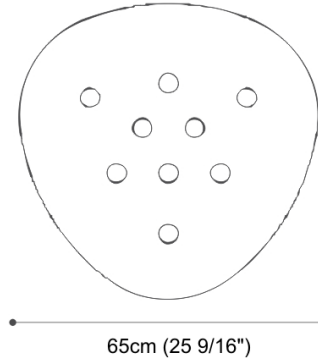

65cm (25 9/16")

Certified by  CSA certified, listed to UL & CSA Standards

Available for **International** specifications by adding "INT" at the end of the existing Model # International spec sheets are available upon request

Exact Measurements: Metric

<b>Model:</b>	D4-2028BLA
<b>Installation:</b>	Surface
<b>Light Color:</b>	Warm White
<b>Color Temperature:</b>	3000K
<b>Delivered Lumen:</b>	3150lm
<b>Fixture Finish:</b>	Black
<b>Lamp Type:</b>	LED
<b>Number of LEDs:</b>	9
<b>Max Wattage Per Lamp:</b>	4.5W
<b>Total Wattage:</b>	40W
<b>Input Voltage:</b>	120Vac
<b>IP Rating:</b>	IP20
<b>Diameter:</b>	65cm / 25 9/16"
<b>Height:</b>	3cm / 1 3/16"
<b>Power Supply:</b>	120V DIRECT LINE (operates without a driver)
<b>Dimming:</b>	It can be dimmed with ELV (Electronic Low Voltage Dimming) down to 20%



#### Additional Details

Ceiling lamp with body/diffuser in aluminium (thickness 2mm / 1/16"). Supplied with 120V LEDs not requiring a power supply unit. It can be suitable for modular realisation: with single luminaires different arrangement can be created.