



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Metal construction with various finishes identified by suffix

## OPERATION

- Pull-on/push-off operation of temperature and volume, rotational control of transfer valve
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 180° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3.6^\circ\text{F}$  ( $\pm 2^\circ\text{C}$ )


## STANDARDS

- Third party certified by CSA to meet CSA B-125, ASME A112.18.1M

- **ADA**  for lever handles

## WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



## VESTIGE™ MOENTROL® with Built-In 3 Function Transfer Valve Trim

**Models:** T4113 series

**Valves:** 3330 series,  
3320 series

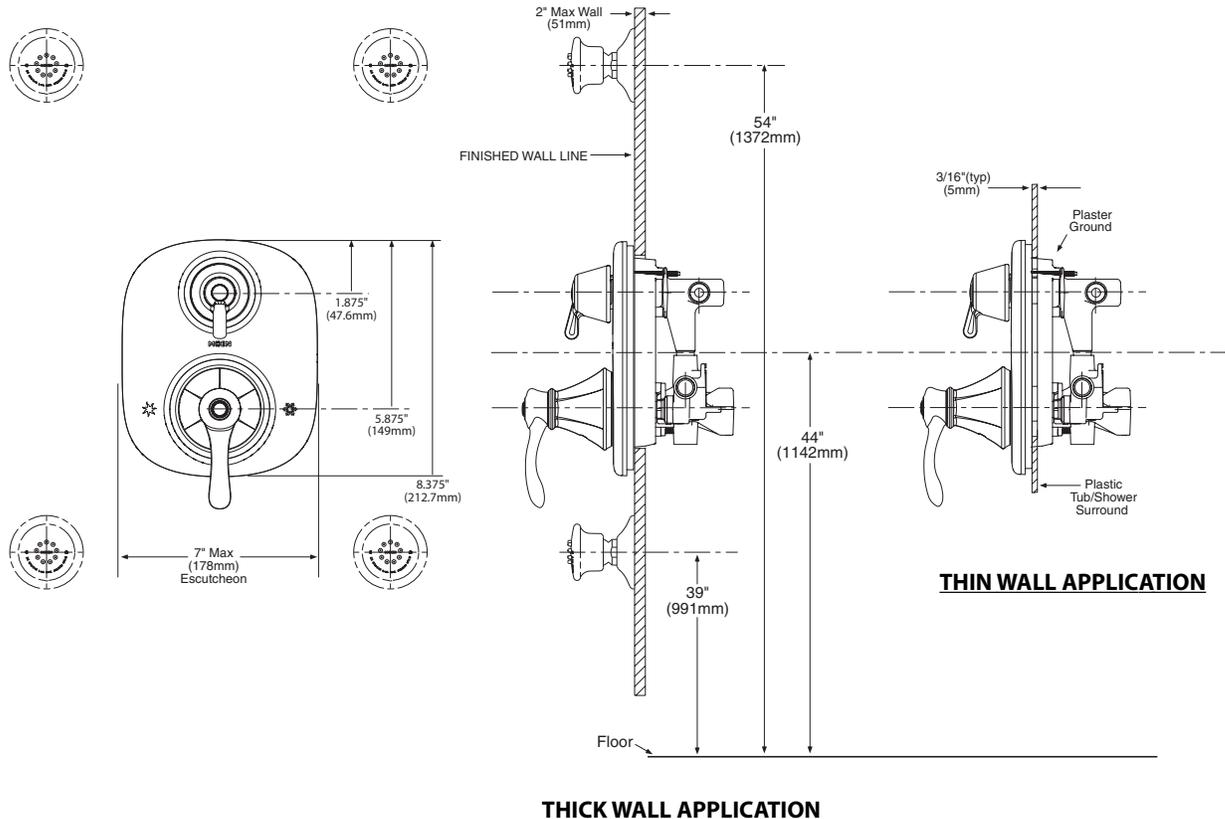



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Fixed mount showerhead only
- Nonmetallic spray face and shell
- Brass swivel ball assembly
- Available in various finishes identified by suffix

## FLOW


- Designed to deliver 2.5 gpm (9.5 L/min) at 60 psi

## STANDARDS

- Designed and manufactured to comply with the requirements of: ASME A112.18.1/CSA B125.1 and all requirements referenced therein


## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



**Moenflo® XL Single Function Showerhead**

**Models: 6302 series**

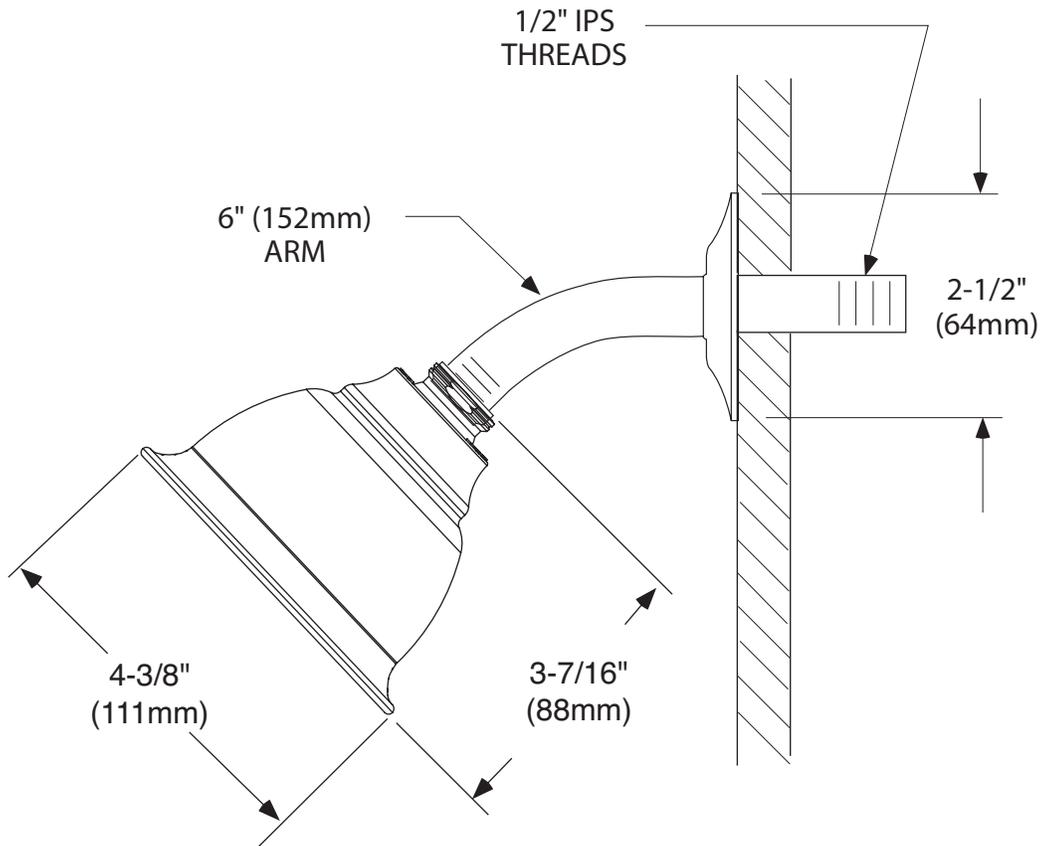

## CRITICAL DIMENSIONS

(DO NOT SCALE)



Buy it for looks. Buy it for life.®

# Specifications

## DESCRIPTION

- Metallic spray face and shell
- Brass swivel ball assembly
- Available in various finishes identified by suffix

## OPERATION

- Single spray function

## FLOW


- Designed to deliver 1.75 gpm max (6.6 L/min) at 80 psi

## STANDARDS

- Third party certified to ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein

## WARRANTY



- Warranted for one year against material or manufacturing defects



## Small Single Function Body Spray

Models: A501 series

### A501 Series

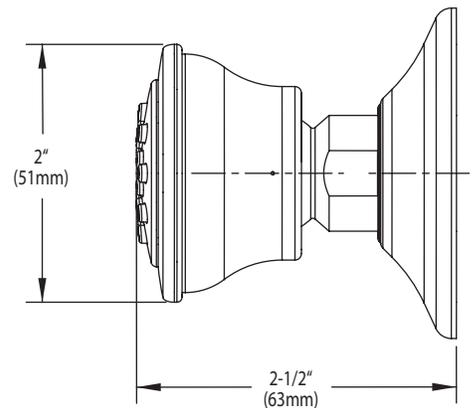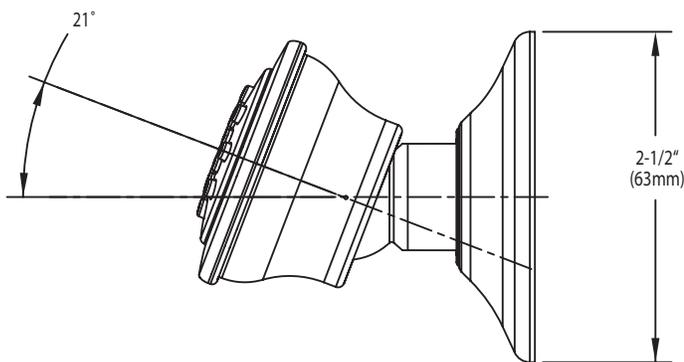

## CRITICAL DIMENSIONS

(DO NOT SCALE)