



LAUREL SMALL & MEDIUM FLUSH MOUNTS

KWFM208; KWFM207

General Product Information



Product Warranty



FCC Statement

Suggested/Required Tools



Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



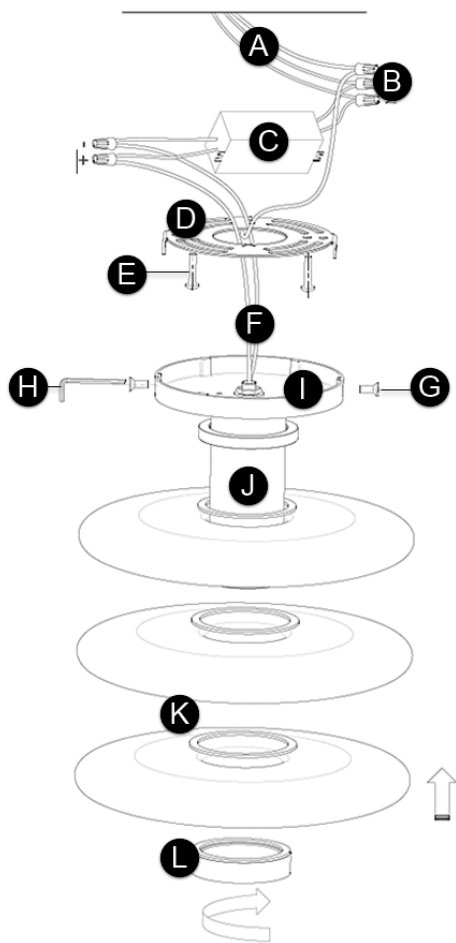

FIXTURE PARTS

- A. Power Line Wires from Junction Box (Not Illustrated) in Ceiling
- B. Wire Nut Connections
- C. Driver
- D. Mounting Plate
- E. Mounting Screws with Washers (Not Illustrated)
- F. Fixture Wires
- G. Fixture Screws
- H. Allen Wrench
- I. Canopy
- J. Fixture
- K. Glass Rings
- L. Shade Ring

INSTRUCTIONS

I. Preparing the Fixture

1. Remove the mounting plate from the canopy by removing the fixture screws with the provided Allen wrench.
2. Secure the mounting plate to the junction box using the washers and mounting screws.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
 - a) Negative (-) fixture wire to the negative (-) output driver wire (negative to negative)
 - b) Positive (+) fixture wire to the positive (+) output driver wire (positive to positive)
4. For 0-10V dimming capabilities, connect the purple and pink wires to a compatible dimmer. Cap off these wires, if not using a dimmer.
5. Carefully tuck all the wires and wire-nut connections in between the canopy and the junction box.

III. Installing the Fixture

1. Slide the canopy onto the mounting plate and secure it in place by reinstalling the fixture screws using the Allen wrench.
2. Fit the glass rings onto the fixture and adjust the threaded ring to find the optimal positioning. Once the ideal fit is determined, remove the gasket tape and assemble the glass rings accordingly.
3. Screw the shade ring snugly in place to complete the installation.