



To deodorize the leather  
leave the chair in a shady  
outside for 1-2 days.



For longer use

Re-tighten bolts every 6 months by using  
the enclosed allen-key.  
\*Using an electric drill can damage the chair.  
Please re-tighten bolts manually.



## Safety Information



Sit in the center of the  
chair, with your back to  
the backrest



Do not sit at the front  
edge of the chair



Do not stand on the  
chair



Do not use the chair  
with more than one  
person



Do not push the chair  
around when a person  
is sitting in it



Do not push down on  
the backrest when a  
person is reclined



Do not place all your  
weight on only the  
backrest

## INSTRUCTION MANUAL


Model: C-6130

✉ HJ-Customer-Service@outlook.com

☎ (909)637-7665 | (909)637-7593

## INSTRUCTION MANUAL

C-6130

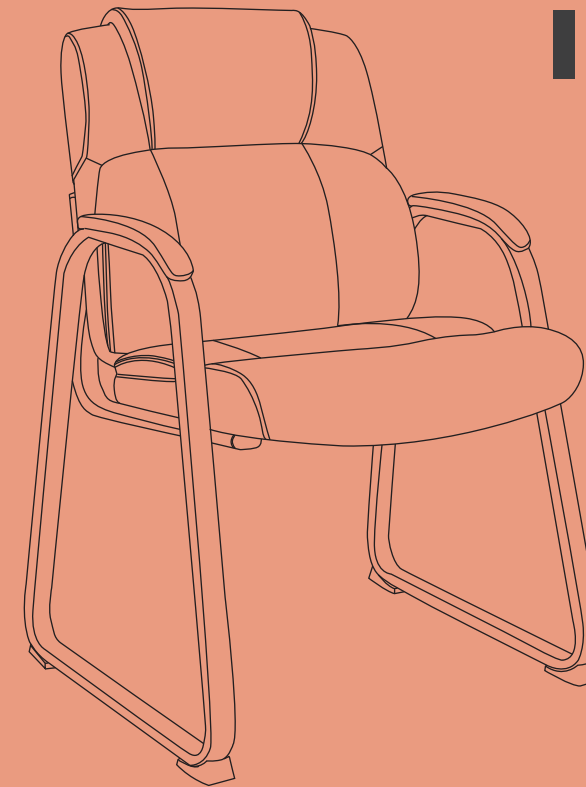


✉ HJ-Customer-Service@outlook.com


☎ (909)637-7665 | (909)637-7593

EST 9:00AM--17:00PM

## Package List



(A)\*1 Armrest (L)



(B)\*1 Armrest(R)



(C)\*1 Backrest



(D)\*1 Seat Cushion



M6x35mm  
(E)\*4 Bolts



M6x25mm  
(F)\*4 Bolts



(G)\*4 Washer




(H)\*4 Caps




(I)\*1 Wrench

# Assembly Instruction

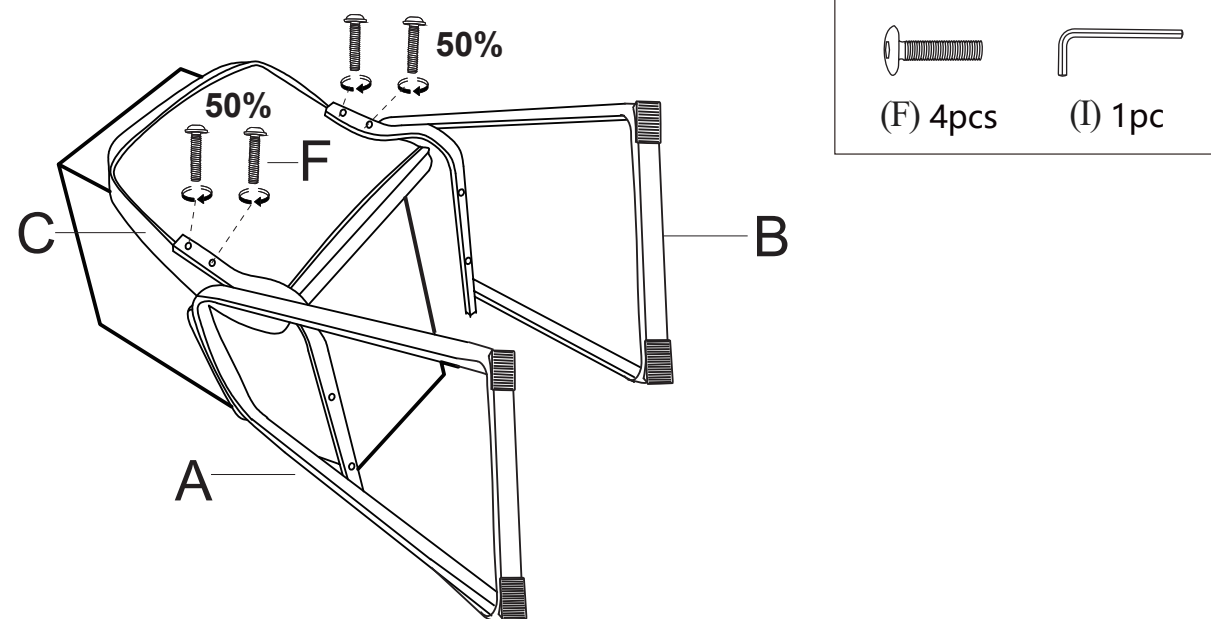

1



Using Wrench (I), install Right Armrest(B)\*1(R) to the right side of the Backrest (C) with Bolts (F)\*2, and install Left Armrest(A)\*1(L) to the left side of it with Bolts (F)\*2.  
**Note: Bolts are only tightened 50%.**

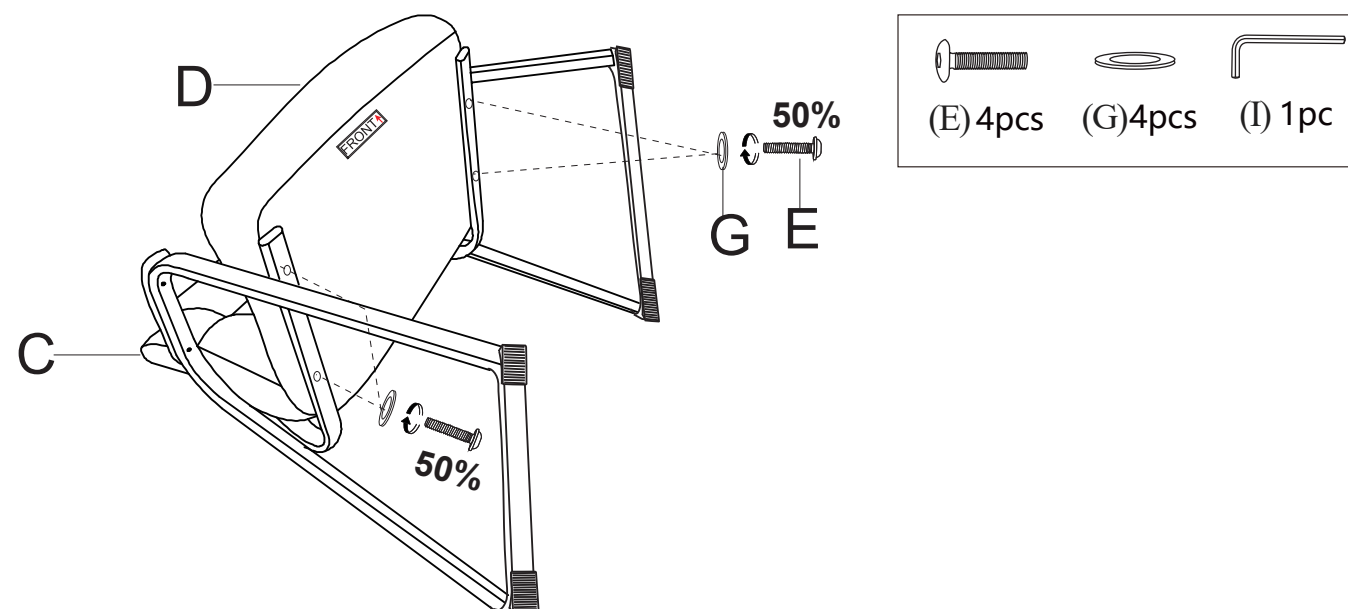

2



Put Bolts (E)\*4 into the Washer (G)\*4. Using Wrench (I), attach Seat Cushion (D) to both sides of the installed Armrests (A&B) with Bolts (E)\*4.  
**Note: Bolts are only tightened 50%..**

The Seat Cushion is marked with "FRONT".  
 Please make sure the installation direction is correct.

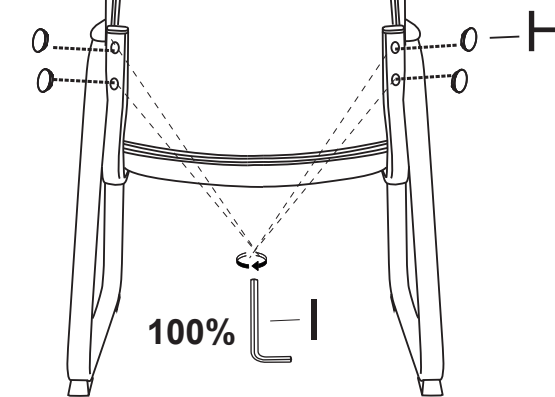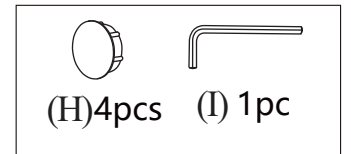

3

100% tighten the Bolts (F)\*4 on both sides of the Backrest (C).  
 Then press Caps (H)\*4 into Armrests holes to cover the Bolts.

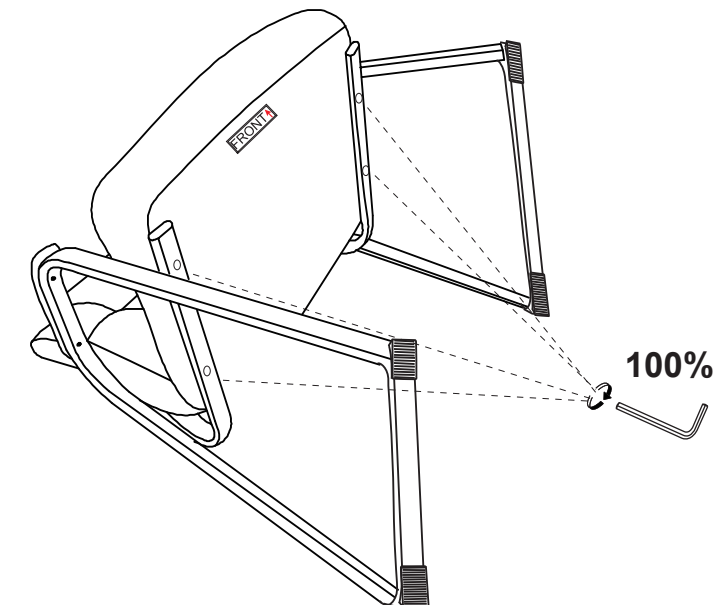

4

100% tighten the Bolts (E)\*4 on both sides of the Seat Cushion (D).

## CAUTION:

- \* Before using the chair, check to ensure that all bolts are fully tightened.
- \* Lubricate all parts and tighten all bolts every 6 months or whenever needed.