CONCRETE LOOK

MEMOIR™

GLAZED REDBODY CERAMIC

daltile®

MEMOIR™

GLAZED REDBODY CERAMIC

Historic Design

Catch a glimpse of historic design with Memoir™. This mesmerizing assortment consists of concrete-like encaustic tile available in four patterns and two color tones each. Memoir is a collection that will make a statement and create everlasting memories.

CONCRETE LOOK

USAGE

- FLOOR
- WALL
- COUNTERTOP
- SHOWER FLOOR
- EXTERIOR FLOOR

SPECIAL FEATURES

- STEPWISE™
- TRU-EDGE™
- REVEAL SYNC3D™
- MADE IN THE U.S.A.
- LARGE FORMAT™
- MOSAIC/ DECO
- ENCAUSTIC
- TERRAZZO
- PAVER
- CUSTOMIZE

CG GLAZED CERAMIC

$ LOW HIGH

SEE CHARTS FOR FULL PRODUCT DETAILS

Cover photo features Memoir™ Jewel Black, 12 x 12 on the wall and Revotile™ Calacatta Marvel, 12 x 24 on the floor.
Above photo features Memoir™ Cosmo Grey, 12 x 12 on the fireplace and Core Fundamentals™ Prime Grey, 12 x 24 on the floor.

CONCRETE LOOK

MEMOIR™

GLAZED REDBODY CERAMIC

SIZES:

- ☐ 12 x 12 Floor Tile

FINISHES: MATTE

COLOR PALETTE

PETAL GREY

PETAL BLACK

CRYSTAL GREY

CRYSTAL BLACK

COSMO GREY


COSMO BLUE

JEWEL GREY

JEWEL BLACK

FLOOR TILE

PETAL GREY ME20

CRYSTAL GREY ME24

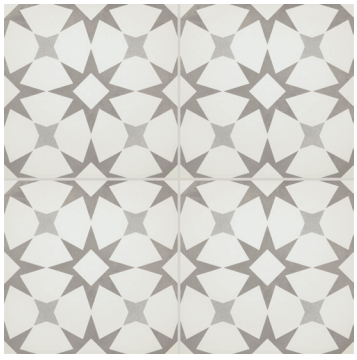
COSMO GREY ME28

JEWEL GREY ME26

PETAL BLACK ME21

CRYSTAL BLACK ME25

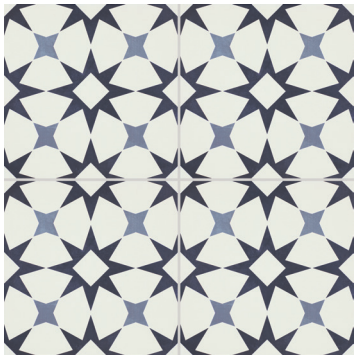
COSMO BLUE ME29

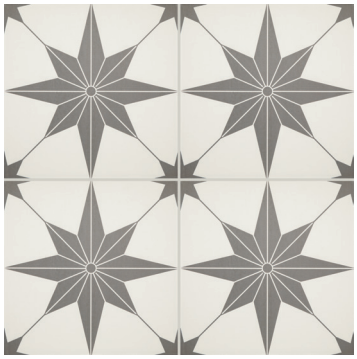
JEWEL BLACK ME27

SLIP RESISTANT | STAINPROOF | DENTPROOF | SCRATCH-RESISTANT | FIRE-RESISTANT | SIMPLICLEAN™

VISIT THE WHY TILE PAGE AT WWW.DALTILE.COM FOR A COMPLETE LIST OF QUALIFICATIONS AND EXCLUSIONS.

MEMOIR™

GLAZED REDBODY CERAMIC

CONCRETE LOOK

SIZES

			Thickness	Finish	Made in U.S.A.
☐	12 x 12 Floor Tile	(11-13/16" x 11-13/16") (30.00 cm x 30.00 cm)	5/16"	M	

M Matte Finish

APPLICATIONS

	Target DCOF wet	Suitable
Dry & Level – Interior Floor	N/A	✓
Wet & Level – Interior Floor	≥ 0.42	✓
Shower Floors – Standard Center Drain	≥ 0.42	
Shower Floors – Linear Drain	≥ 0.42 (Mosaic) ≥ 0.60 (Floor)	
Exterior Floor Applications (including patios, pool decking & other wet areas with minimal footwear)	≥ 0.60	
Ramps & Inclines	≥ 0.65	
Walls/Backsplashes	N/A	✓
Countertops	N/A	✓
Pool Linings	N/A	

A DCOF value of ≥0.42 is the standard for tiles specified for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3. For more information about DCOF and the DCOF AcuTest™, visit daltile.com/DCOF.

APPLICATION NOTES:

Suitable for exterior applications (provided it is noted as suitable in the applications chart above) in non-freezing climates, when proper installation methods are followed.

INSTALLATION

Grout Joint Recommendation	Shade Variation
3/16"	Medium (V2)

PERFORMANCE CHARACTERISTICS

	ASTM#	Result
Water Absorption	C373	< 7.0%
Breaking Strength	C648	≥ 250 lbf
Scratch Hardness	C1895	8.0
Chemical Resistance	C650	Resistant

For additional information on test results, visit us at: daltile.com/information/TestResults.

DURABILITY

Floor Surface Wear Resistance

1	Residential Bathrooms	3	All Residential / Light Commercial
2	All Residential Areas	4	All Residential / Commercial

NOTES

Since there are variations in all fired ceramic and natural products, tile and trim supplied for your particular installation may not match samples. Final confirmation should be made from actual tiles and trim prior to installation. Manufactured in accordance with ANSI A137.1 standards.

Not for use on ramps. Water, oil, grease, improper drainage and certain footwear can create slippery conditions. Floor applications expected to be exposed to these conditions require extra caution in product selection.

For additional information refer to "Factors to Consider" at: daltile.com/Factors.

PRE-CONSUMER RECYCLED MATERIALS

REVEAL IMAGING®

All or select items within this series meet the requirements for these qualifications. For more information, visit daltile.com.

ZEROTOX

7834 C.F. Hawn Freeway,
Dallas, Texas 75217 | 1.800.933.TILE

To view the complete collection of Daltile® products and information, visit our website at **daltile.com.**

daltile®

©2026 Daltile (09/26)