

Features

- Includes face plate with handle, shower arm with flange and showerhead.
- Single handle controls both on/off activation and temperature setting.
- Supplied with ADA compliant metal lever handle.
- Includes single function 2.0 gpm (7.6 l/min) showerhead with Katalyst[®] Air Induction Technology.
- Showerhead features MasterClean[™] sprayface for easy cleaning.
- Complements the Alteo faucet and accessory collections.

Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing, exceeding industry durability standards.

Installation

• Trim set requires valve to complete installation.

Required Products/Accessories

K-304/K-P304 Series Rite-Temp® Valves or

- K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{R}}$ Valves or
- K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{B}}$ Valves or
- K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{B}}$ Valves or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{R}}$ Valves or
- K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{B}}$ Valves or
- K-304/K-P304 Series Rite-Temp ${\ensuremath{\mathbb R}}$ Valves or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp $\ensuremath{\mathbb{B}}$ Valves or
- K-304/K-P304 Series Rite-Temp® Valves or
- K-304/K-P304 Series Rite-Temp® Valves or

K-304/K-P304 Series Rite-Temp® Valves







Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 EPA WaterSense®

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

CP Polished Chrome

BN Vibrant® Brushed Nickel




Alteo® Rite-Temp® Shower Valve Trim

K-TS45106-4E

KOHLER. Faucets

Alteo® Rite-Temp® Shower Valve Trim K-TS45106-4E

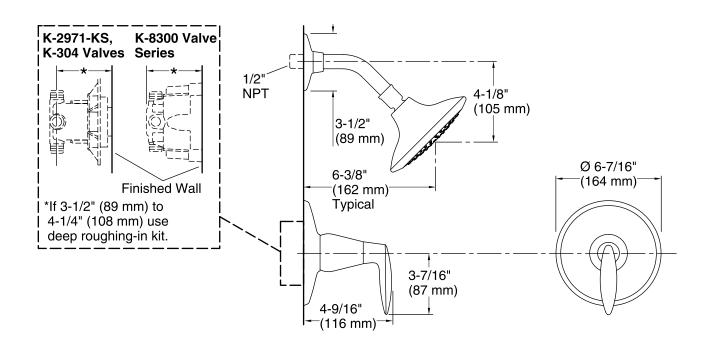

Technical Information

All product dimensions are nominal.

Showerhead/Body Spray:

Rated maximum flow: 2 gal/min (7.6 l/min) Pressure: 80 psi (5.5 bar)

Notes

Install the product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

