


INSTALLATION MANUAL

CEILING FAN WITH LIGHTS

Model No.: QXF9022-02

Thank you for choosing and using our product.

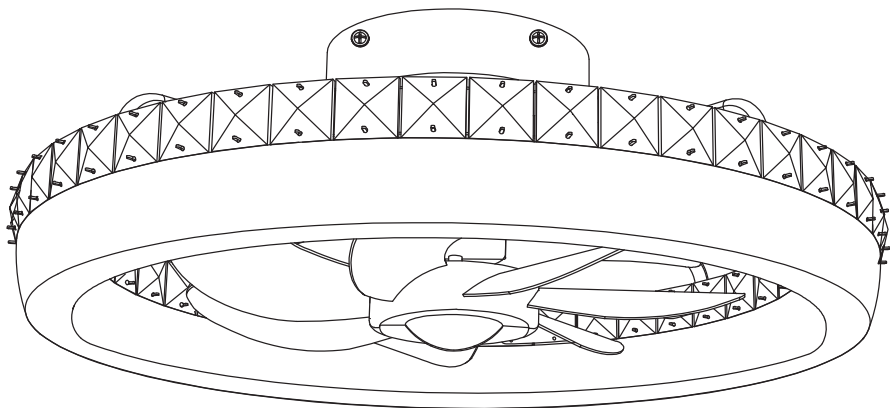


TOOLS REQUIRED




Ladder



Pliers



Wire Strippers




Screwdrivers















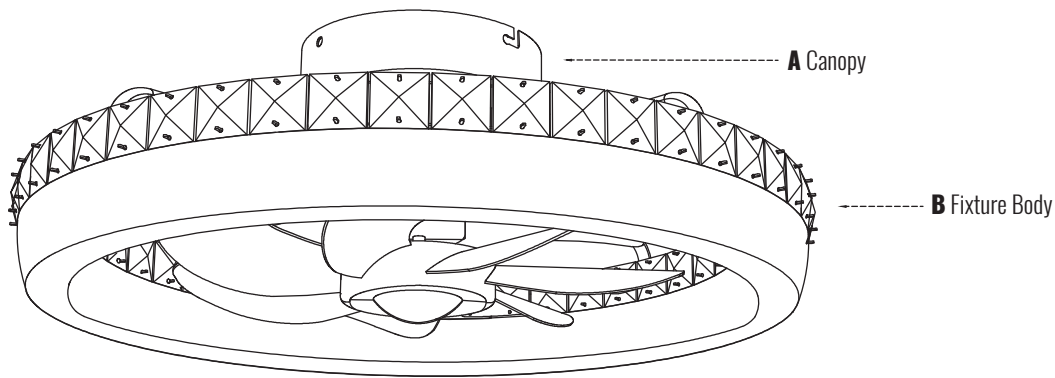

Power Drill

PACKING LIST




INSTALLATION KIT

AA		1x	BB		3x	CC		1x	DD		1x
Mounting Bracket			Wire Nut			'S' Hook			Ground Screw		
EE		4x	FF		2x	GG		4x	HH		4x
Long Wood Screw			Outlet Box Screw			Flat Washer			Set Screw		
II		4x	JJ		2x	KK		2x	LL		1x
Large Plastic Anchor			Small Plastic Anchor			Short Wood Screw			Remote Holder		
MM		1x	NN		1x						
Remote Control			Gloves								

Note:
1.Some extra hardware may be included. The quantity listed above is the number required for installation.
2.AA/HH are pre-installed on the Canopy (A).
3.DD is pre-installed on the Mounting Bracket (AA).


INSTALLATION

1.Install the Mounting Bracket

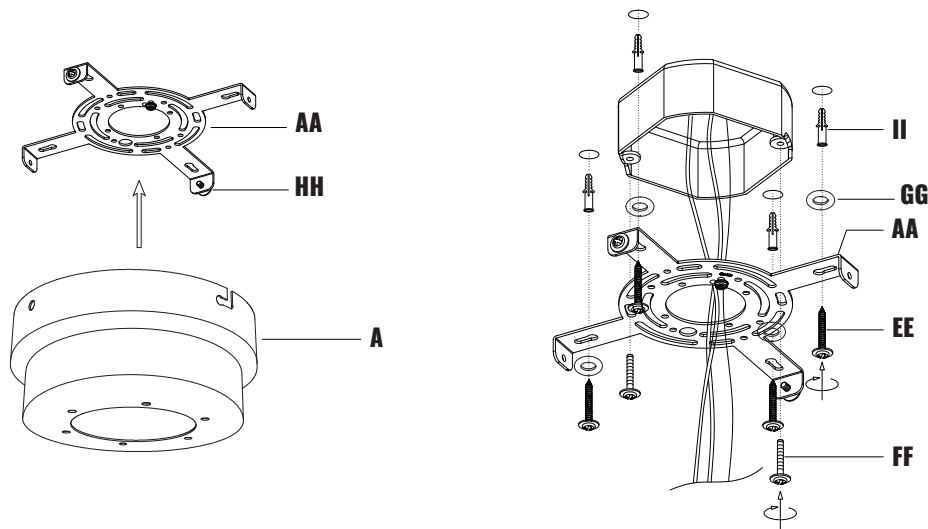


STEP 1: Loosen and remove the set screws (HH) from the round holes of canopy (A), and loosen the set screws (HH) in the 'L' holes but do not remove them, and then remove the mounting bracket (AA) from canopy (A).
STEP 2: Mark and drill screw holes in the ceiling, then insert the large plastic anchors (II).
STEP 3: Take off the screws from the outlet box, and secure the mounting bracket (AA) onto the box with the screws taken off or outlet box screw (FF).
STEP 4: Tighten the mounting bracket (AA) with the flat washer (GG) and long wood screws (EE).

2.Hang the Fan

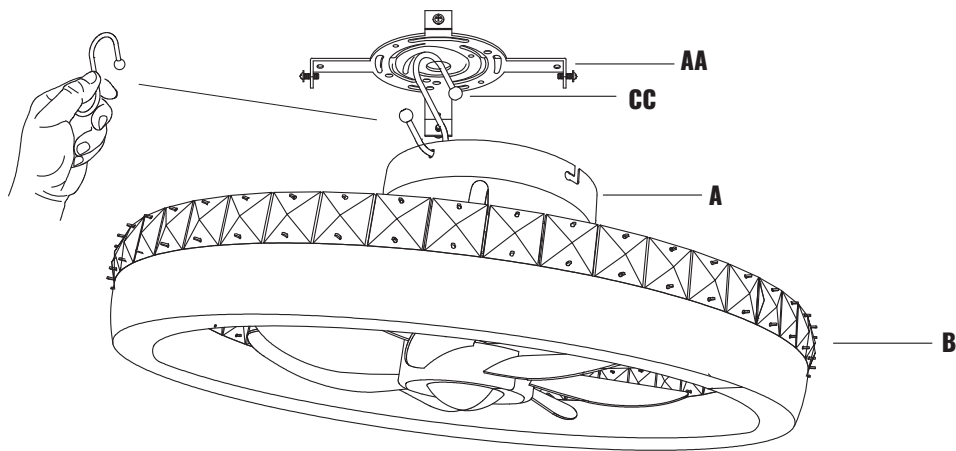


Hang the fixture body (B) onto the mounting bracket (AA) with 'S' hook (CC) provided.

3.Connect the Wires

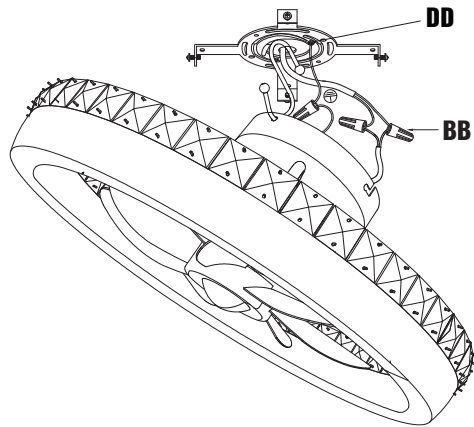


STEP 1: Wrap the ground wire from the outlet box around the ground screw (DD) on the mounting bracket (AA), and then connect the ground wire from the fixture to the ground wire from the outlet box.
STEP 2: Connect the wires from the fixture to the house supply wires with wire nut (BB), neutral wire (white) to neutral wire, and hot wire (black) to the hot wire. Wrap the connection with electrical tape.
STEP 3: Spread apart the wires so that the hot wires are on one side of the outlet box and the neutral wires are on the other.
Note:
This fan only needs one set of input wires (black, white, and ground wire). Both of the fan and lights will be controlled by the remote controller.
This fan can only be connected to an on/off switch if you have one, not a dimmer switch.

4.Attach the Canopy

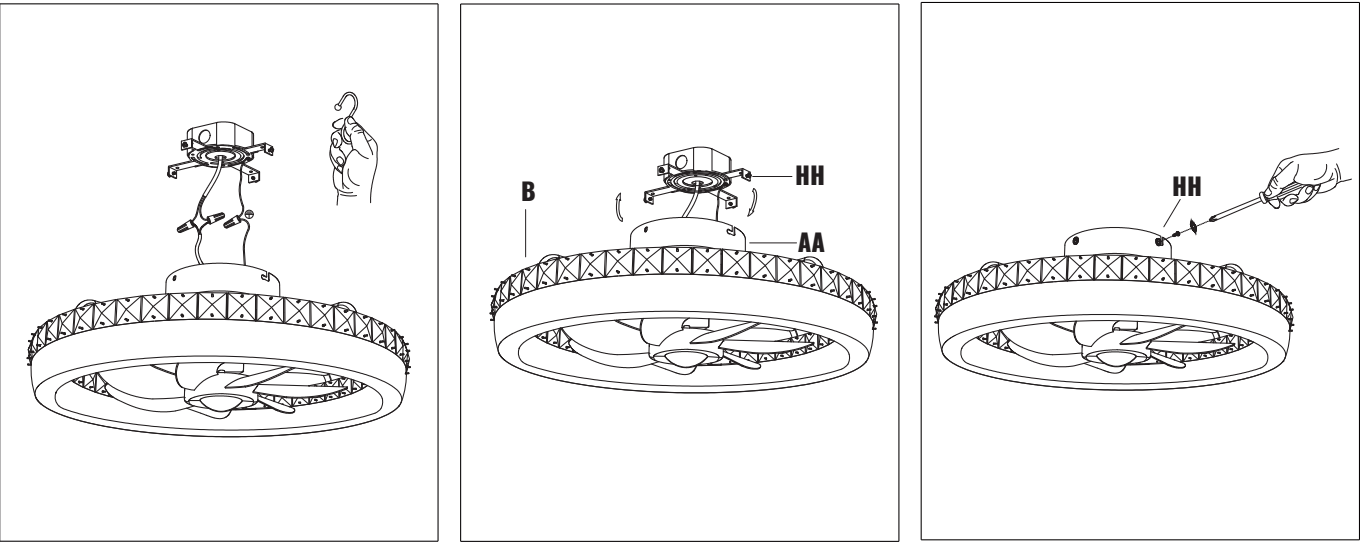

STEP 1: Take away the "S" hook (CC).
STEP 2: Align the 'L' slots from the canopy (A) to the set screws (HH) on the mounting bracket (AA), rotate the canopy (A) to lock it onto the mounting bracket (AA).
STEP 3: Tighten the set screws (HH).

5.Install the Remote Control and Holder

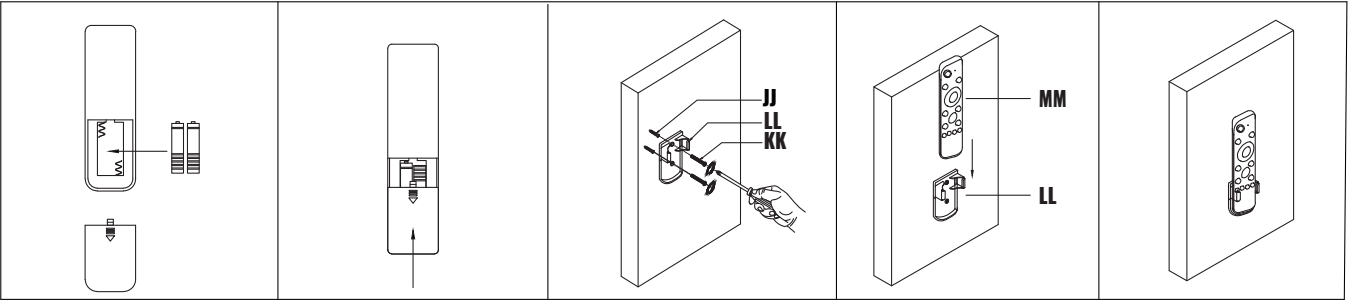

STEP 1: Insert 2 batteries before using: AAA 1.5V battery x 2pcs (not included).
STEP 2: Mark and drill screw holes in the wall, then insert the small plastic anchors (JJ).
STEP 3: Use short wood screw (KK) to fix the remote holder (LL) onto the wall.

6.Remote Control Instructions

	Turn off the fan and lights
	Turn on/off the lights.
	Fan moves forwards or reversely.
	Turn on the fan on 1/2/3/4/5/6 speed
	Turn on/off the fan.
	Adjust the light color temperature
	Adjust the brightness of the light
	Quick switch of the light color: warm light →cool light →white light
	Night mode, dim the lights
	Natural Wind
	2H/4H for timing the fan.
	REMOTE SIGNAL PAIRING: If the remote control loses signal of the fan, press and hold the button at the very beginning after it's turned on from wall switch. After the fan light flashes or beeps, it's done.

NOTE:
Please insert 2 batteries before using: AAA 1.5V battery x 2pcs (not included).