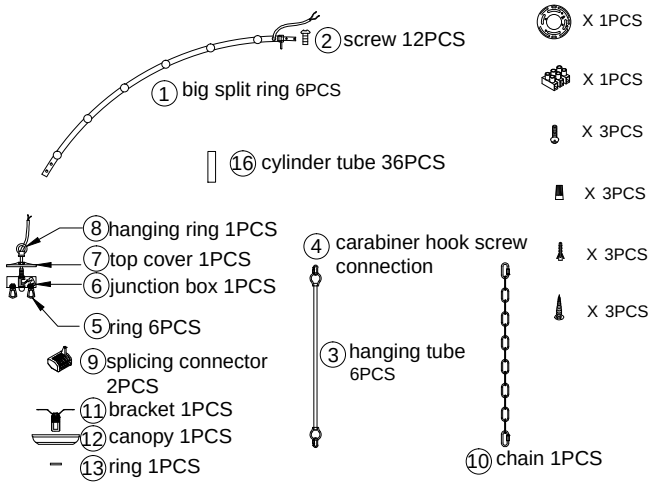

male A should connect with female A, male B should connect with female B (C with C, D with D).

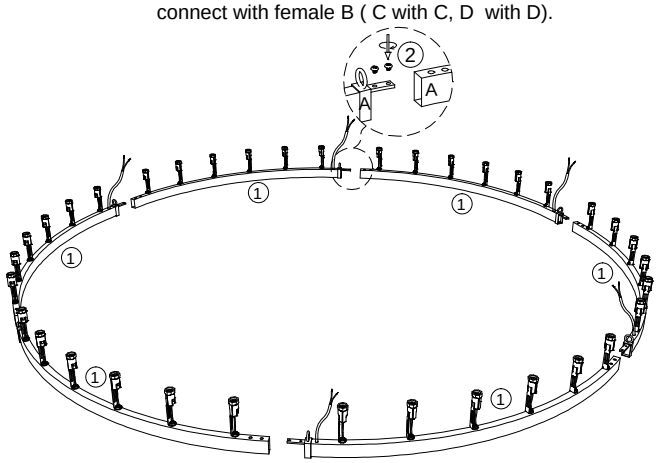

1.Assemble the split ring ①, fasten it with screw ②.

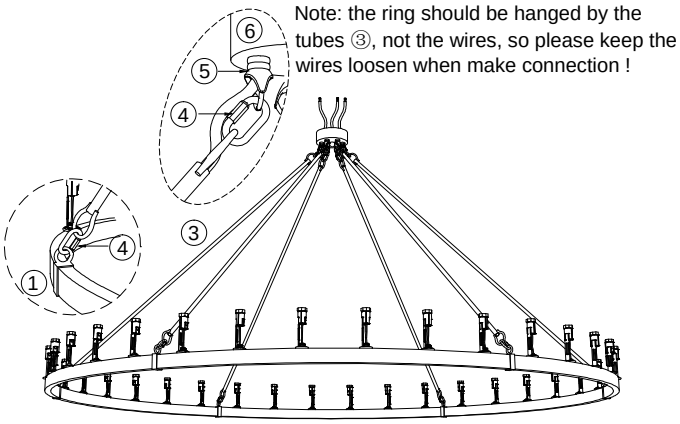

Note: the ring should be hanged by the tubes ③, not the wires, so please keep the wires loosen when make connection !

2.Let the wire go through the hanging tube ③, connect the ring ① to the ring of junction box ⑥ with carabiner hook screw connection ④, let the wire go through the junction box ⑥.

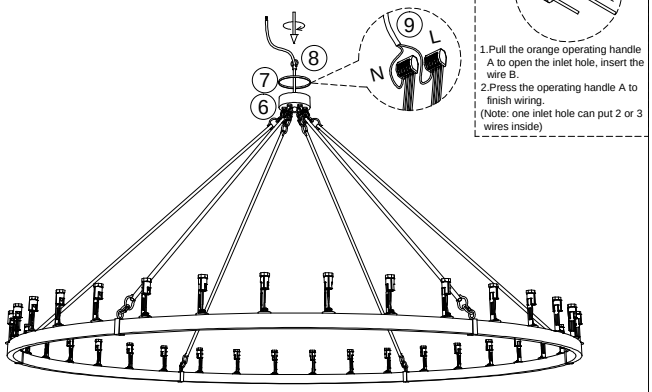

3.Connect all the wires by parallel with connectors ⑨(all live line-L use one connector, and neutral Line-N use another connector).
4.Let the wire go through top cover ⑦ and hanging ring ⑧, rotate the ring ⑧ to fix the conver ⑦ to the fixture.

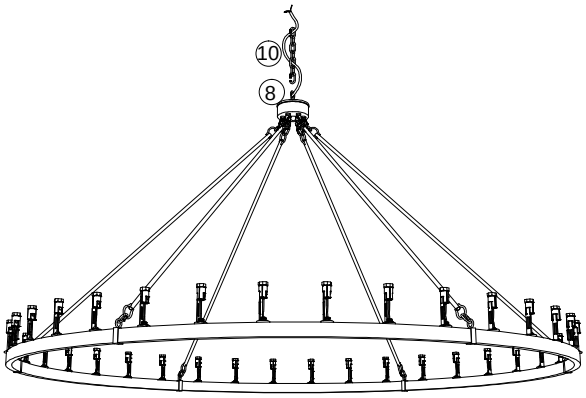

5.Install the chain ⑩ to the fixture, let the wire go through the chain ⑩.

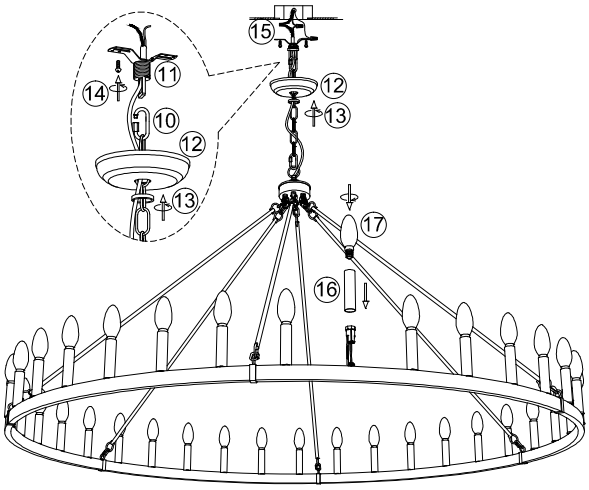

6.Install the bracket ⑪ to the ceiling junction box with screw ⑭.
7.Let the chain ⑬ and the wire go through ring ⑬ and canopy ⑫ and bracket ⑪, after that hang the fixture to the bracket with chain ⑬.
8.Connect the wire to your home line with cap connectors ⑮.
9.Rotate the ring ⑬ to lock the canopy ⑫ to the bracket ⑪.
10.Put the cylinder tube ⑯ on the bulb holder and install the bulb ⑰.

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !