

KOTR30MXE

30" OVER THE RANGE MICROWAVE OVEN



- 1.6 cu.ft OTR microwave designed to install above a cooktop or range
- 300 CFM blower with 2 speed settings
- High powered microwave combined with an integrated recirculating ventilation hood
- Standard recirculation setting may be change to horizontal or vertical external venting
- Energy saving LED surface lighting and halogen interior lighting
- Touch controls with LED display
- 2 years parts & labor warranty

FEATURES	
Design	Stainless steel trim and black glass door with push button door release
Microwave power levels	10
Microwave Output power	950 W
Oven volume	1.6 cu.ft
Turntable	Ø 13.6"
Cavity finishing	Enameled grey
Sensor reheat, defrost	Yes
Timer	Yes
Max Extraction Power	300 CFM
Blower speed	High 300 CFM / Low 190 CFM
Recirculation	Yes
Lights	2 LED surface lights – 1 halogen interior light
Included accessories	1 chromed wire shelf
TECHNICAL SPECIFICATIONS	
Voltage, frequency	120 V 60 Hz
Max Amp usage, power rating	13.5 A - 1500 W
Duct Size	Transition adapter to 5" or 6" diameter duct
Power Connection	NEMA 5-15P plug with 41" 11/32 cord
Certification	UL, DOE
Warranty	2 years parts & labor



Includes kit for recirculation mode

KOTR30MXE

30" OVER THE RANGE MICROWAVE OVEN INSTALLATION INSTRUCTIONS



INSTALLATION DRAWING

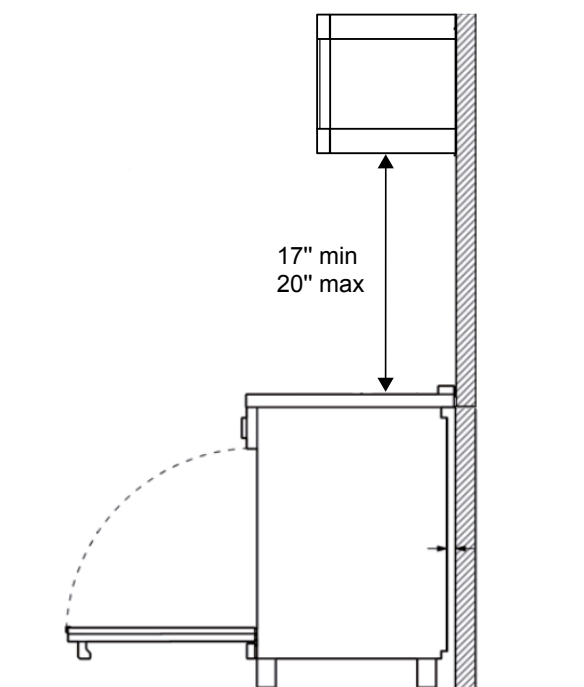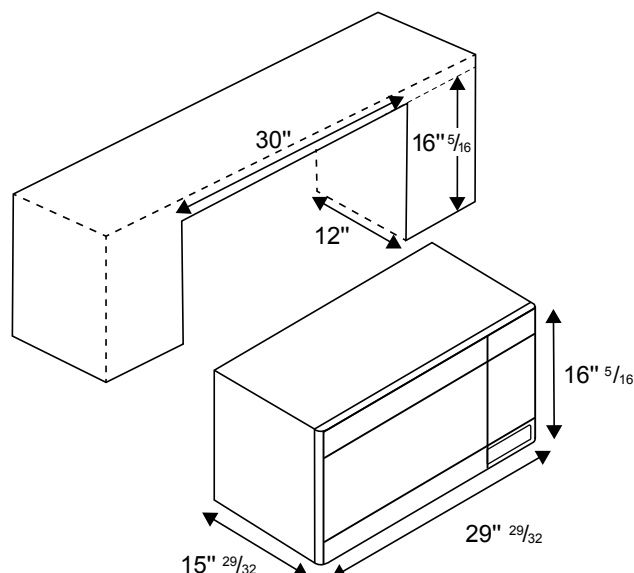



ELECTRICAL CONNECTION

The Power Supply Cord and plug must be connected to a separate 120 Volt AC 60 Hz, 15 Amp or more branch circuit, single grounded receptacle.

The cord has a 3-pronged plug and must be installed into an outlet that is properly grounded.

The electrical receptacle must be within the minimum cord length of 39" 3/8

WHEN USING 3-PRONGED PLUG

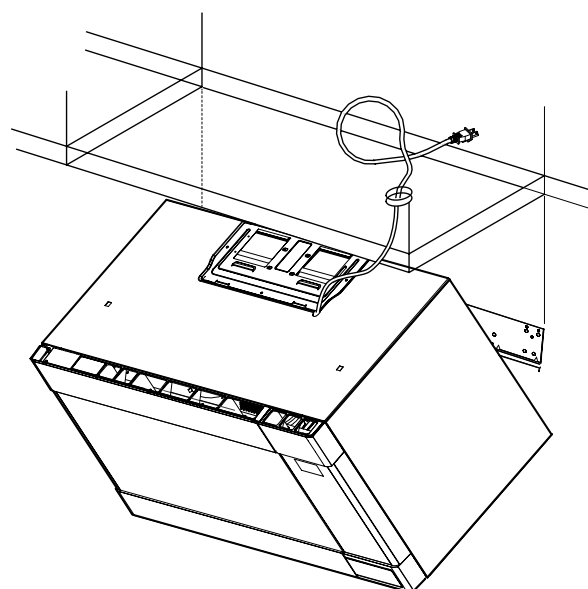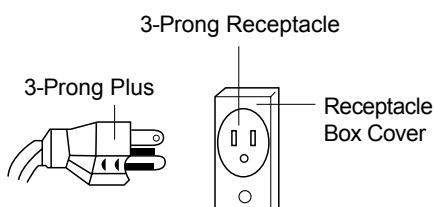

This model can also be installed for external venting.
For full installation details and requirements consult the installation manual.

Bertazzoni recommends to operate the appliance after it has been installed in a cabinet. The kitchen cabinets shall be made of materials capable of withstanding temperatures at least 117°F (65°C) above room temperature in order to avoid possible damage to the cabinets during oven usage. For further installation instructions refer to the installation manual.

Disclaimer: while every effort has been made to insure the accuracy of the information contained in this document, Fratelli Bertazzoni reserves the right to change any part of the information at any time without notice. For detailed installation specifications consult the installation manual. Fratelli Bertazzoni, Bertazzoni and the winged wheel brand icon are registered trademarks of Bertazzoni Spa.