

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Interlace

## Round Multi Light 4CCT

| Model & Size                | Color Temp & CRI               | Watt | Lumens | Finish                |
|-----------------------------|--------------------------------|------|--------|-----------------------|
| PD-47803R 21" -<br>3 Lights | 2<br>700K/3000K/3500K/4000K 90 | 64 W | 2902   | BK Black<br>CH Chrome |

Example: **PD-47803R-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS


|               |                                            |
|---------------|--------------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K                    |
| Input:        | 120-277V,50/60Hz                           |
| CRI:          | 90                                         |
| Dimming:      | ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5% |
| Rated Life:   | 50000 Hours                                |
| Standards:    | ETL, cETL<br>Damp Location Listed          |
| Construction: | Aluminum body, silicone diffuser           |



### FINISHES:



### LINE DRAWING:

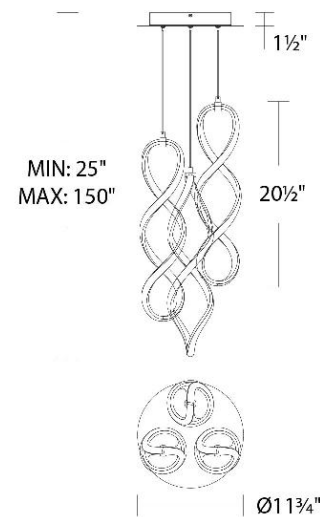

PD-47803R

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Interlace

## Round Multi Light 4CCT

| Model & Size             | Color Temp & CRI               | Watt  | Lumens | Finish                |
|--------------------------|--------------------------------|-------|--------|-----------------------|
| PD-47805R 21" - 5 Lights | 2<br>700K/3000K/3500K/4000K 90 | 107 W | 4837   | BK Black<br>CH Chrome |

Example: **PD-47805R-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS


|               |                                            |
|---------------|--------------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K                    |
| Input:        | 120-277V,50/60Hz                           |
| CRI:          | 90                                         |
| Dimming:      | ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5% |
| Rated Life:   | 50000 Hours                                |
| Standards:    | ETL, cETL<br>Damp Location Listed          |
| Construction: | Aluminum body, silicone diffuser           |



### FINISHES:



### LINE DRAWING:

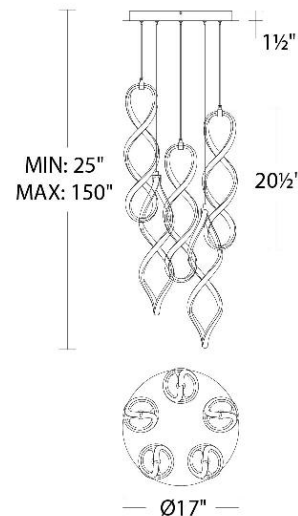

PD-47805R

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Interlace

## Round Multi Light 4CCT

| Model & Size             | Color Temp & CRI               | Watt  | Lumens | Finish                |
|--------------------------|--------------------------------|-------|--------|-----------------------|
| PD-47809R 21" - 9 Lights | 2<br>700K/3000K/3500K/4000K 90 | 193 W | 8707   | BK Black<br>CH Chrome |

Example: **PD-47809R-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS


|               |                                            |
|---------------|--------------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K                    |
| Input:        | 120-277V,50/60Hz                           |
| CRI:          | 90                                         |
| Dimming:      | ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5% |
| Rated Life:   | 50000 Hours                                |
| Standards:    | ETL, cETL<br>Damp Location Listed          |
| Construction: | Aluminum body, silicone diffuser           |



### FINISHES:



### LINE DRAWING:

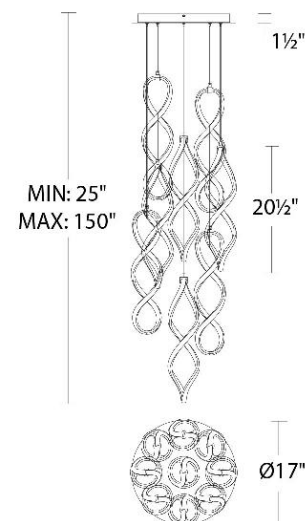

PD-47809R

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Interlace

## Round Multi Light 4CCT

| Model & Size              | Color Temp & CRI               | Watt  | Lumens | Finish                |
|---------------------------|--------------------------------|-------|--------|-----------------------|
| PD-47815R 21" - 15 Lights | 2<br>700K/3000K/3500K/4000K 90 | 321 W | 14511  | BK Black<br>CH Chrome |

Example: **PD-47815R-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS


|               |                                            |
|---------------|--------------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K                    |
| Input:        | 120-277V,50/60Hz                           |
| CRI:          | 90                                         |
| Dimming:      | ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5% |
| Rated Life:   | 50000 Hours                                |
| Standards:    | ETL, cETL<br>Damp Location Listed          |
| Construction: | Aluminum body, silicone diffuser           |



### FINISHES:



### LINE DRAWING:

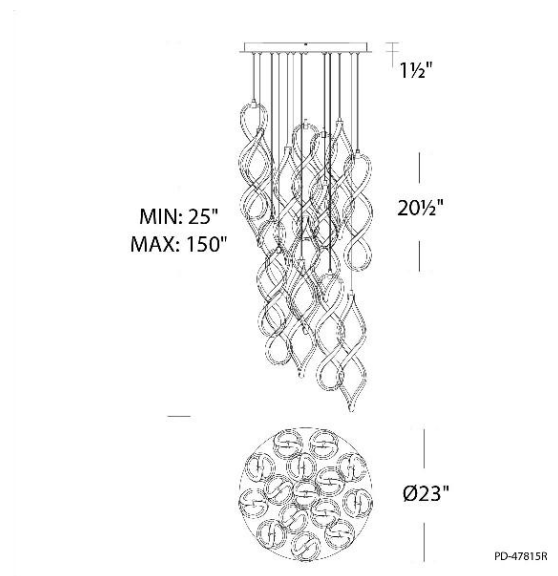

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

# Interlace

## Round Multi Light 4CCT

| Model & Size              | Color Temp & CRI               | Watt  | Lumens | Finish                |
|---------------------------|--------------------------------|-------|--------|-----------------------|
| PD-47821R 21" - 21 Lights | 2<br>700K/3000K/3500K/4000K 90 | 450 W | 20316  | BK Black<br>CH Chrome |

Example: **PD-47821R-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

### SPECIFICATIONS

|               |                                            |
|---------------|--------------------------------------------|
| Color Temp:   | 2700K/3000K/3500K/4000K                    |
| Input:        | 120-277V,50/60Hz                           |
| CRI:          | 90                                         |
| Dimming:      | ELV: 100-10% , 0-10V: 100-5%,TRIAC: 100-5% |
| Rated Life:   | 50000 Hours                                |
| Standards:    | ETL, cETL<br>Damp Location Listed          |
| Construction: | Aluminum body, silicone diffuser           |



### FINISHES:



### LINE DRAWING:

