





ASSEMBLY INSTRUCTIONS


Ax1  Seat	Bx1  Seat cushion	Cx1  Leg frame	Dx1  Stretcher	Ex1  Bracket
HARDWARE LIST				
Fx1  Wrench	Gx3  M6x40MM Bolt	Hx6  M6x7MM Bolt	Ix3  Washer	

STEP1

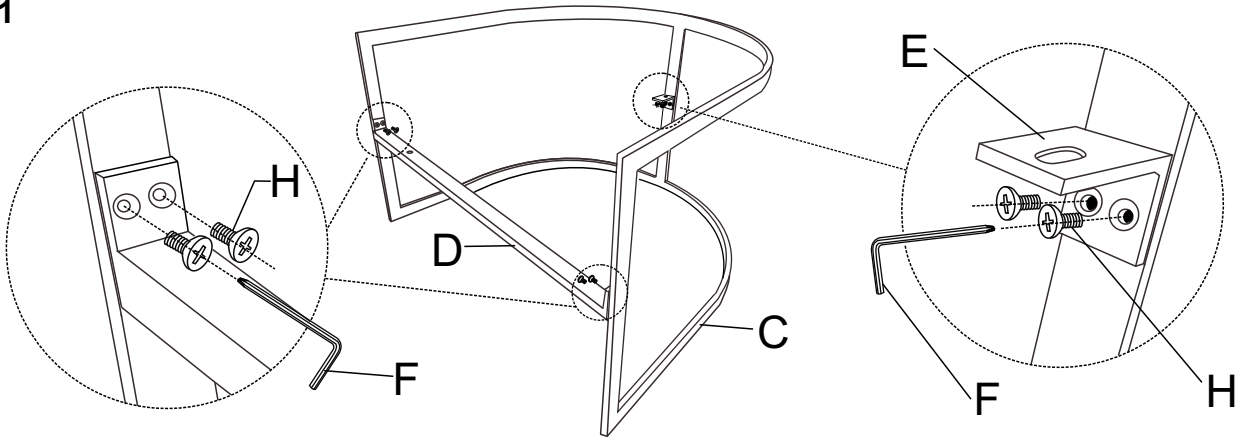


Assembly the stretcher (D) and bracket(E) to the leg frame(C) with bolts (H) and wrench (F)(cross end).

STEP2

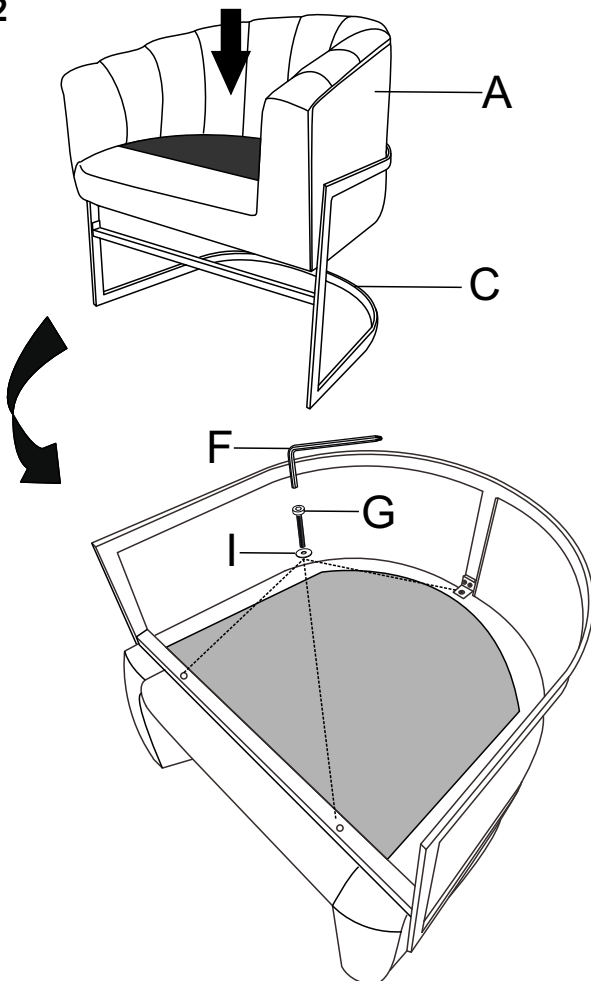

Place seat (A) onto leg frame(C),then turn upside down, connect the leg frame to seat with bolts(G) and wrench (F)(hexagon end).

STEP3

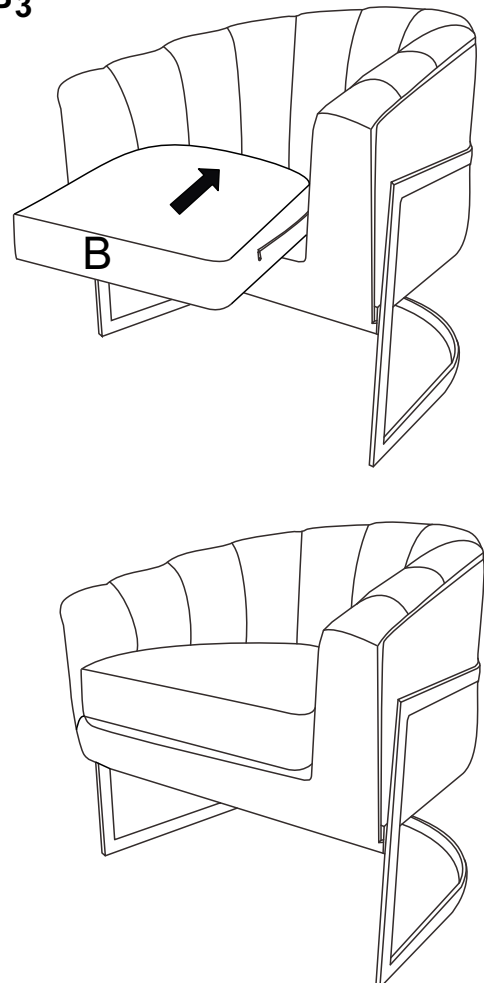

Place seat cushion(B) onto seat.
Assembly completed.