

INSTALLATION GUIDE



WARNINGS AND CAUTIONS

READ AND SAVE THESE INSTRUCTIONS

Please read and understand this entire manual before attempting to assemble, install or operate the product.

WARNING

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.
- RISK OF PERSONAL INJURY - DO NOT bend the blades when installing the fan, or cleaning the fan. Do not insert foreign objects in between rotating fan blades.
- RISK OF FIRE, ELECTRIC SHOCK, OR PERSONAL INJURY - mount to outlet box marked and use mounting screws provided with the outlet box.
- All set screws must be checked, and re-tightened where necessary, before installation.
- After making the wire connections, the wires should be spread apart with the grounded conductor and the equipment-grounding conductor on one side of the outlet box and the ungrounded conductor on the other side of the outlet box.
- This unit weights 6kg(13.23 lbs).

CAUTION

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Disconnect fixture from the power source before replacing bulbs or cleaning. Make sure the bulbs are given sufficient time to cool be before removing.


TOOLS REQUIRED



CARE AND MAINTENANCE


- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.

PACKAGE CONTENTS

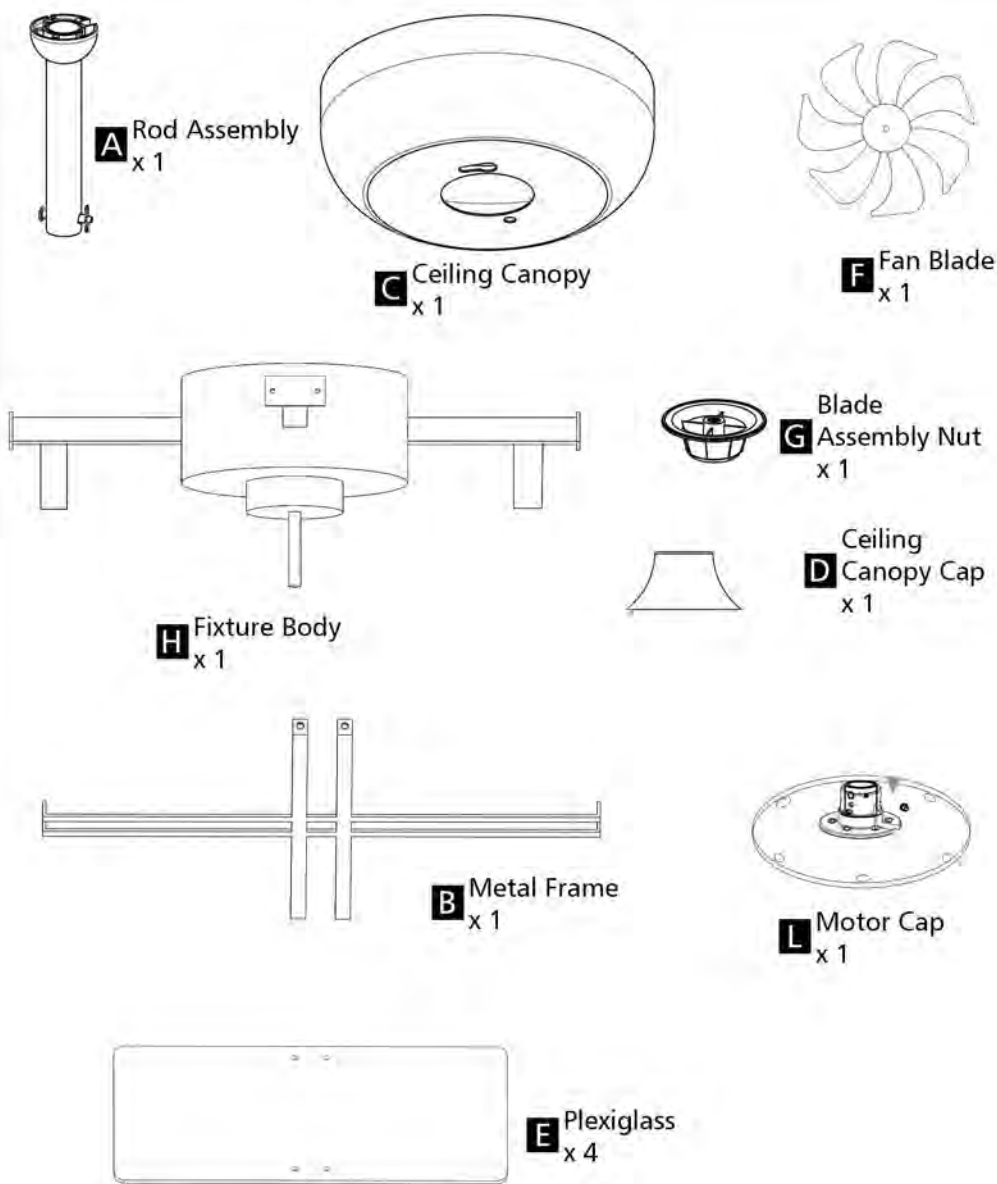

INSTALLATION

15 Remote Control Instruction

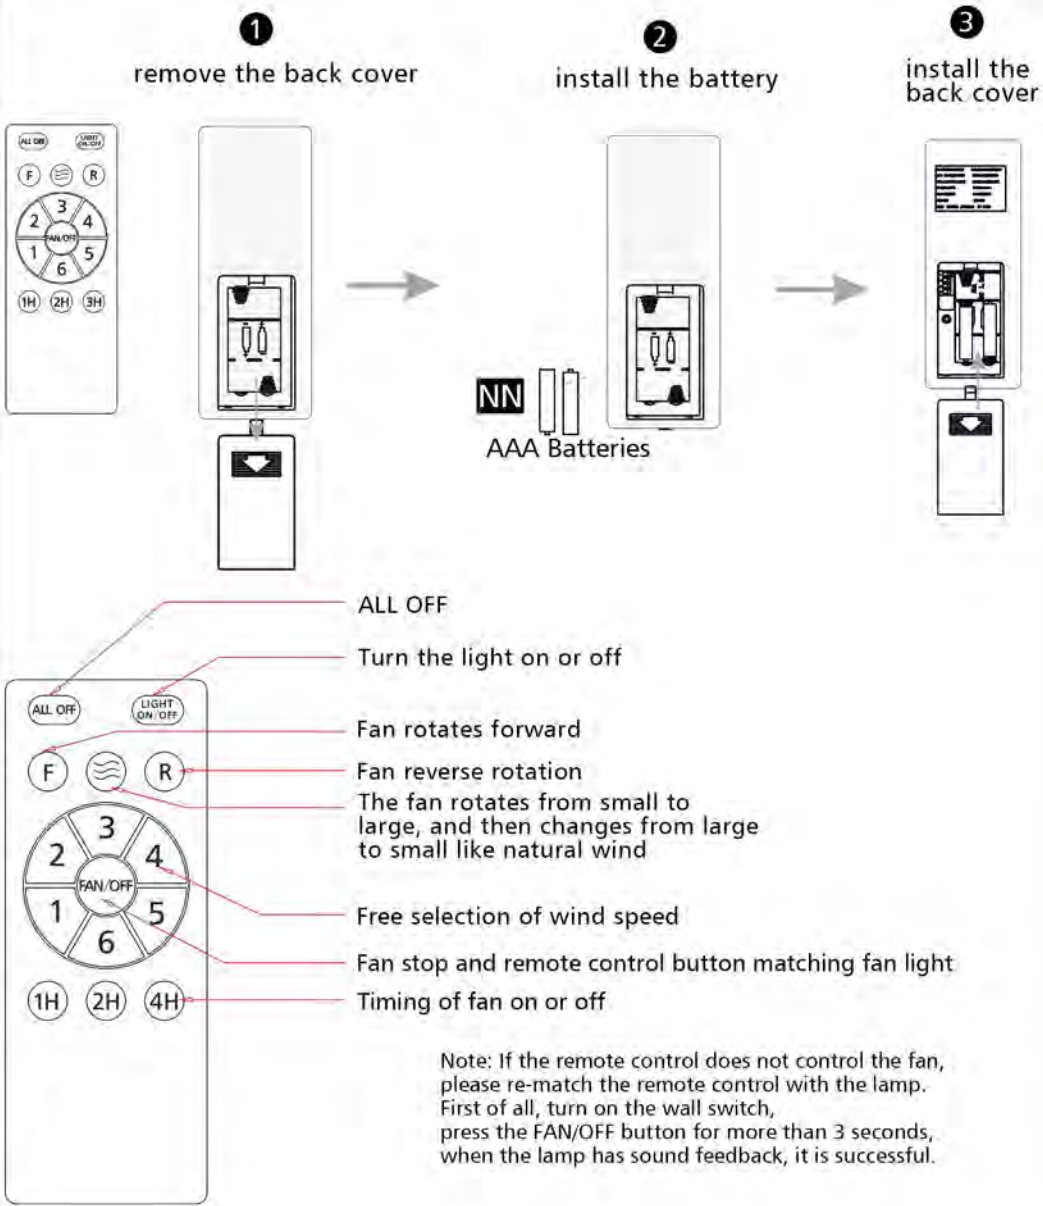


Your installation is now complete. Save this sheet for future


INSTALLATION

13 Install Bulbs

Install four correct bulbs referring to fixture markings and/or labels for maximum wattage. Before installing the bulb rotate the fixture base to 45 degrees to be able to install the bulb. If the angle needs to be changed, disconnect the power supply

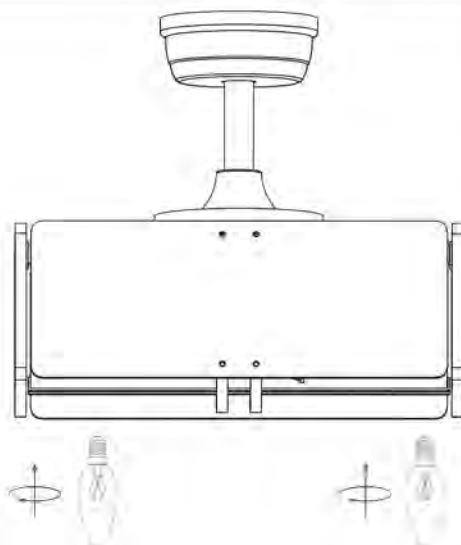


14 Install Wall Bracket

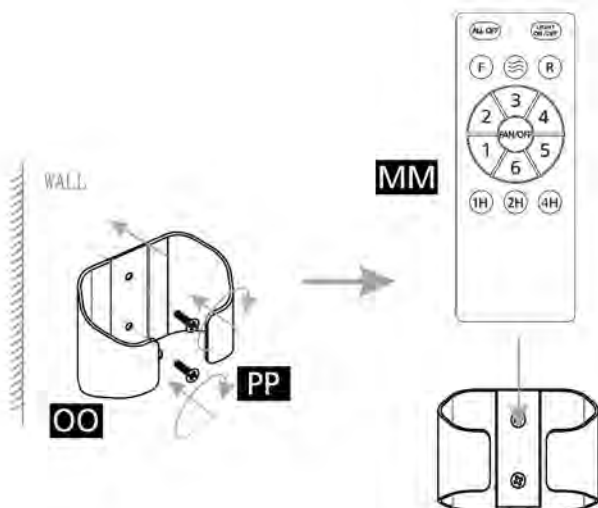

PACKAGE CONTENTS (PARTS BAG 1)



AA Wire Connector
x 4



BB Screw
x 4




CC Wall Anchor
x 4



DD Anchor Bolt
x 2



EE Mechanical Screw
x 2



GG Hanger Frame
x 1

PACKAGE CONTENTS (PARTS BAG 2)



KK Mechanical Screw
x 18



LL nut
x 35


PACKAGE CONTENTS (PARTS BAG 3)



MM Remote Control
x 1



NN AAA Batteries
x 2




OO Wall Bracket
x 1



PP Screw
x 2


INSTALLATION

1 Install Rod to Fixture Body

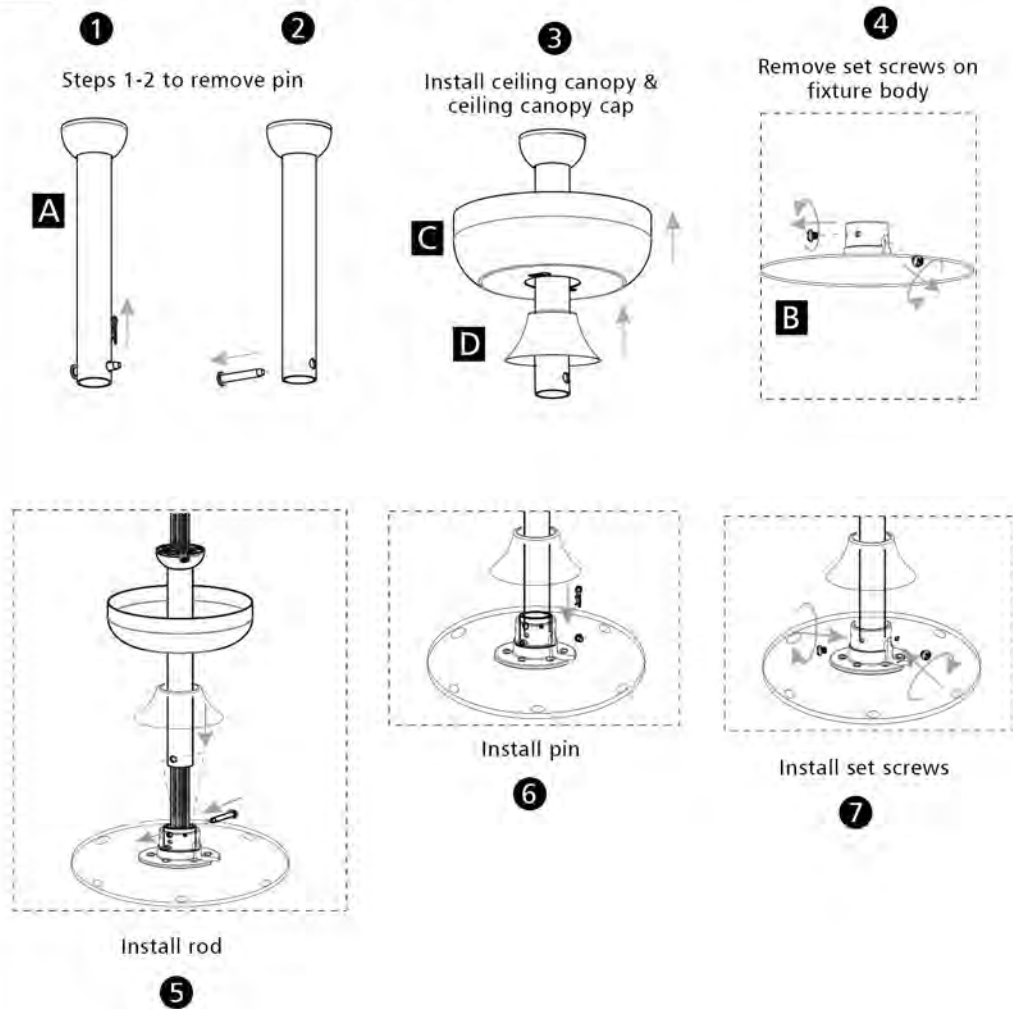


INSTALLATION

11 Wiring

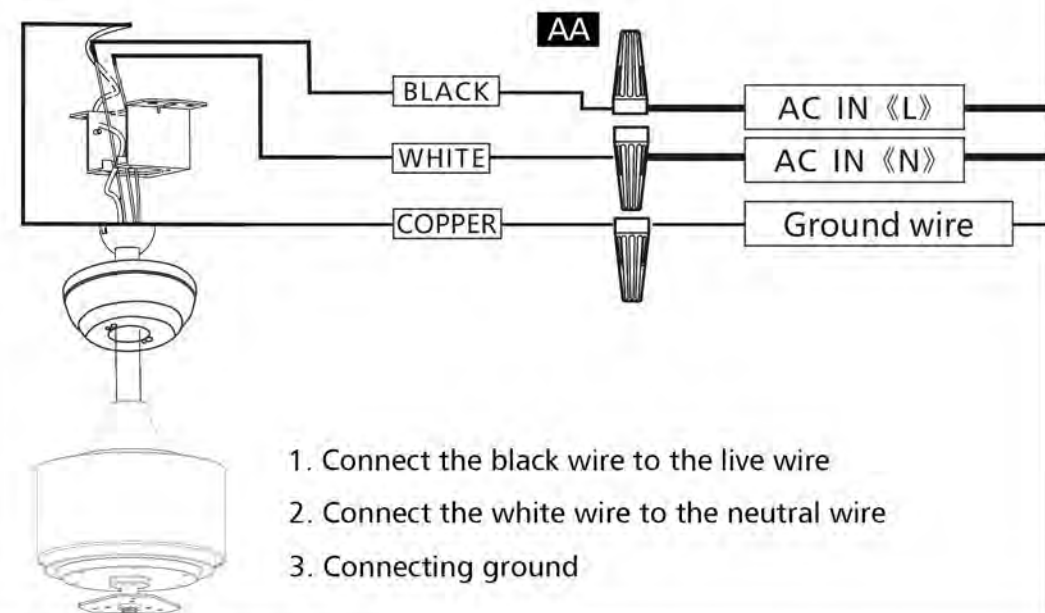

12 Install Ceiling Canopy


Carefully tuck all wires inside of the ceiling canopy during installation.

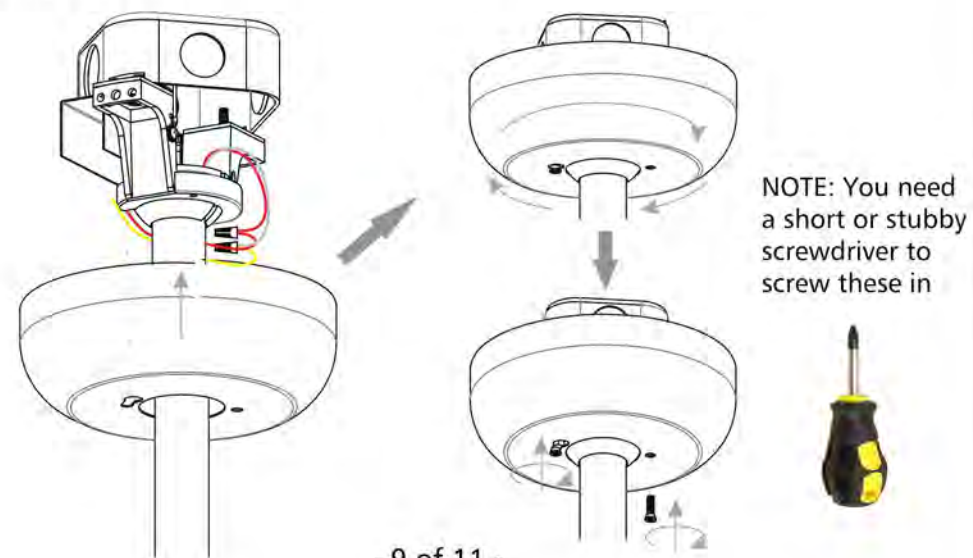


INSTALLATION

9 Loosen Shoulder Screws

Remove one shoulder screw from hanger frame. Loosen the other shoulder screw approximate 1/4" and retain it on the hanger frame.

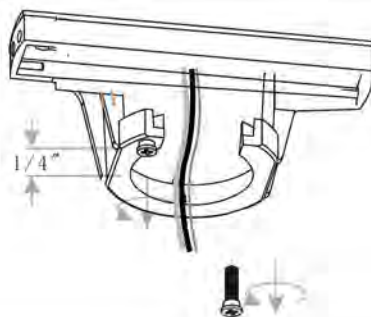


10 Install Rod to Hanger Frame

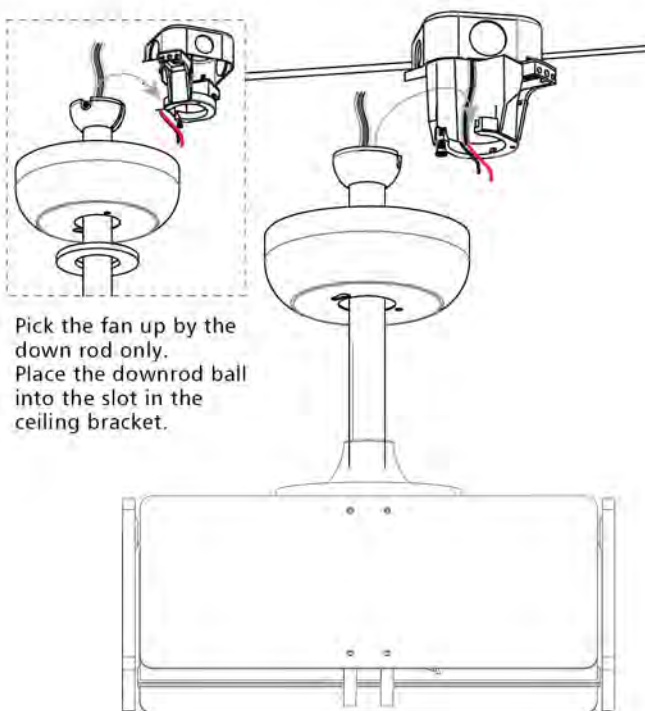


Pick the fan up by the down rod only. Place the downrod ball into the slot in the ceiling bracket.

INSTALLATION


2 Remove the set screws on the fixture body

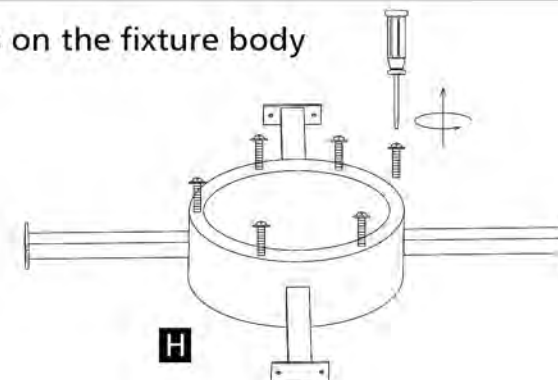

3 Thread the wires from the fixture body

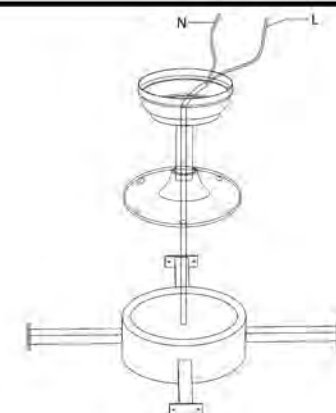


4 Install the screws into the motor cap

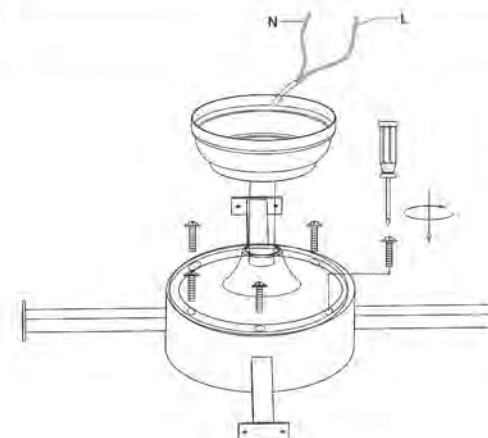


INSTALLATION

5 Install Fan Blade

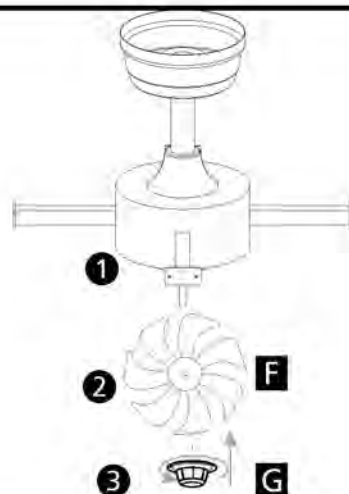

6 Check Accessories

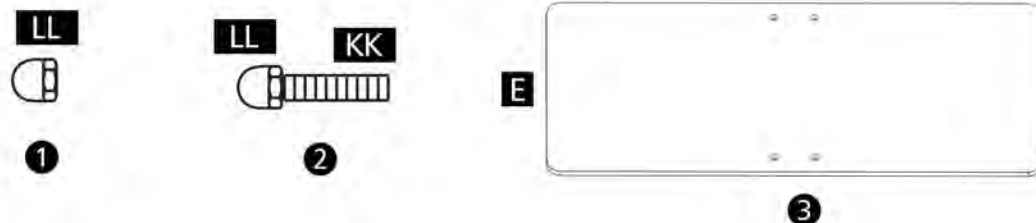


1. Check the number of nuts 35 and the number of mechanical screws 18.


2. Tighten mechanical screw to the nut like 2 and need 16 of them.

INSTALLATION

7 Install Plexiglass

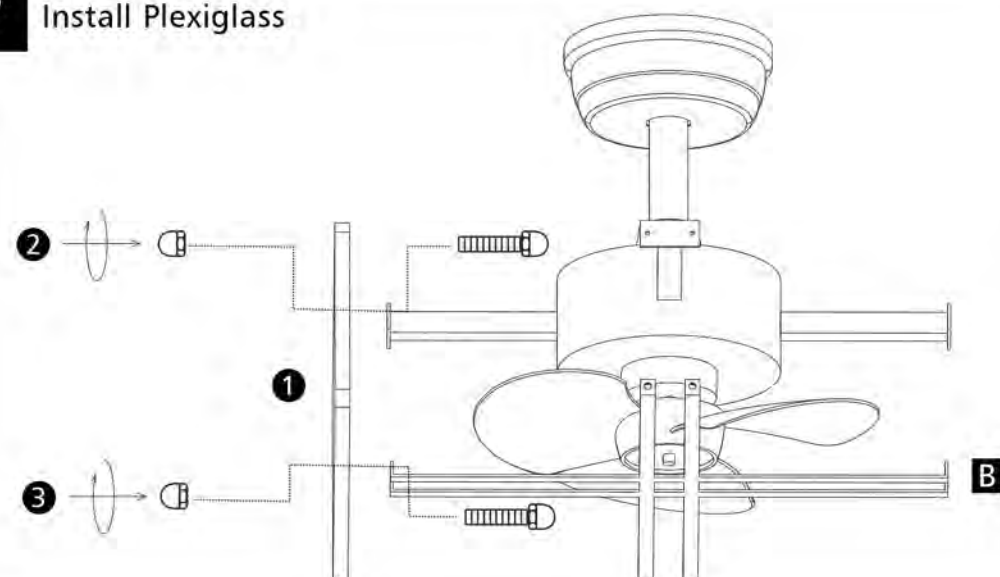

8 Install Hanger Frame

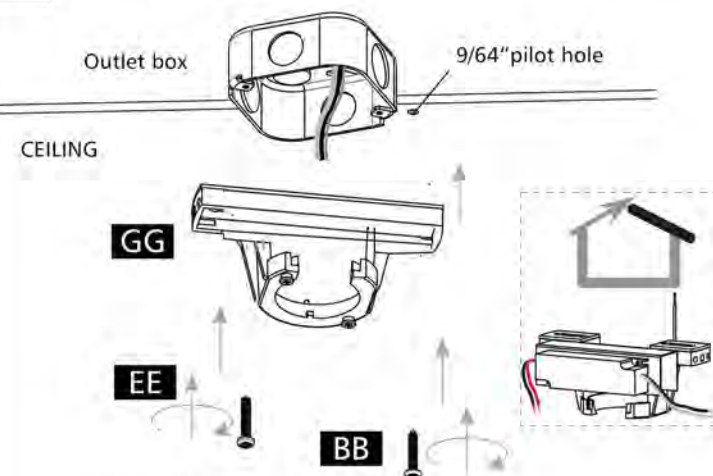

Use machine screws when securing to existing ceiling fan-rated outlet box.

This fan cannot be used for the ceiling which angle is greater than 19 degrees.

For angled ceilings, point opening toward peak.