

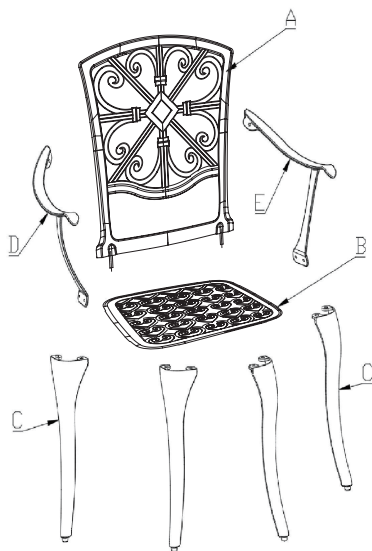



INSTRUCTION MANUAL



3PCS Cast Aluminum



Part Number	Images and Sizes	Qty.
A		1
B		1
C		4
D		1
E		1
F	M6*25	6
G	M6	6
H	M6	6


M	M6	2	I	M6	6
N		10	J	M8	10
			K	M8	10
			L	M8	10

ASSEMBLY INSTRUCTIONS



CAVEAT

Note: Please only tighten any bolts once all bolts are placed correctly and the product is lying flat. If you tighten one bolt, it may cause other bolts to get out of position.

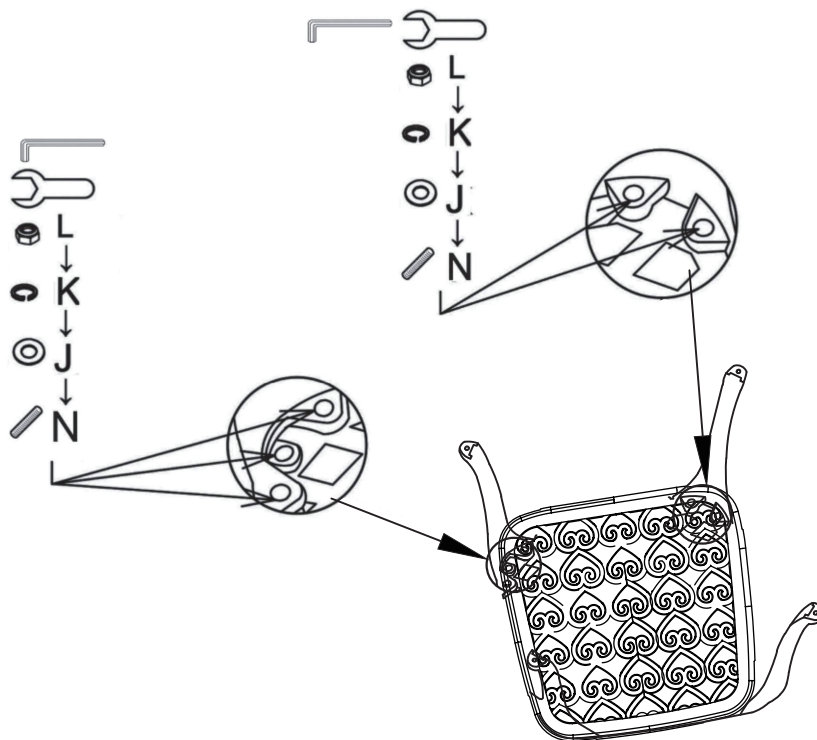

STEP 1

Attach the front and back Legs (C) to the chair seat (B) using studs (N), washers (J), and nuts (K, L). Do not tighten the nuts.


Attach the backrest (A) to the chair seat (B) using studs (N), washers (J), and nuts (K, L). Do not over-tighten.

ASSEMBLY INSTRUCTIONS



CAVEAT



Note: Please only tighten any bolts once all bolts are placed correctly and the product is lying flat. If you tighten one bolt, it may cause other bolts to get out of position.

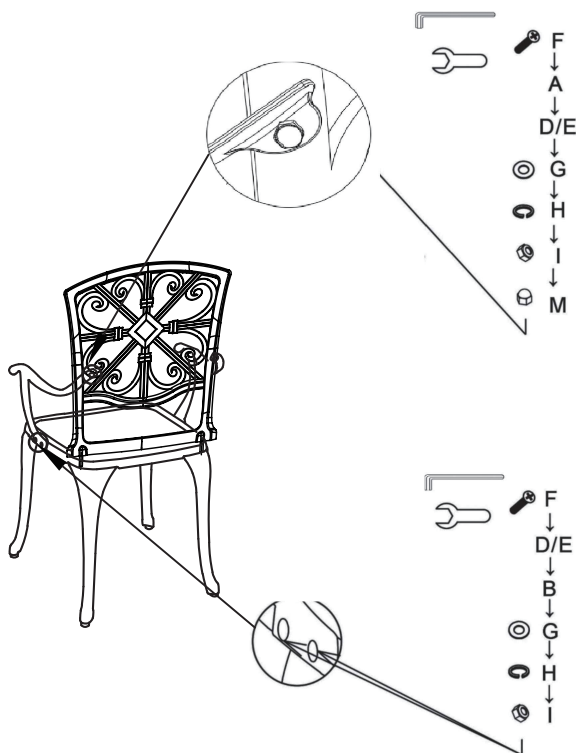

STEP 2

Attach the right and left arm (D, E) using bolts (F), washers (G), and nuts (H, I). Then attach them to the backrest (A) and chair seat (B). Do not over-tighten.

Upon completion of the entire assembly and bolted up-all screws, you can be tightened down all screws. Next, add the protect hats (M).

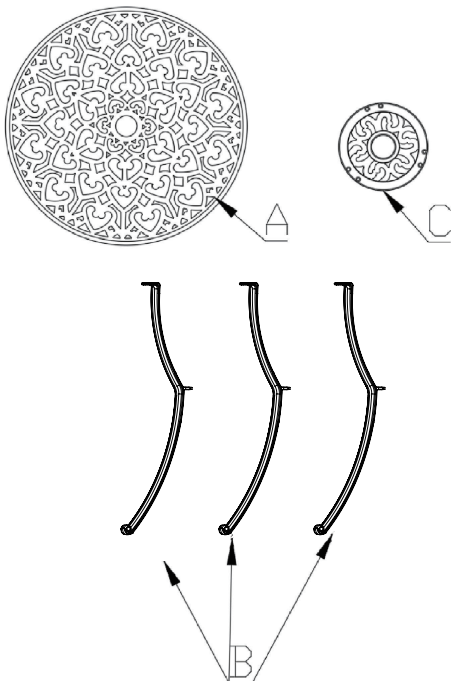


Part Number	Images and Sizes	Qty.
A		1
B		3
C		1
D	 M8	3
E	 M8	3
I	 M6	6
J	 M6	6
K	 M6	6
F	 M8	3
G	 M8*30	3
H	 M6*35	6

ASSEMBLY INSTRUCTIONS



CAVEAT

Note: Please only tighten any bolts once all bolts are placed correctly and the product is lying flat. If you tighten one bolt, it may cause other bolts to get out of position.

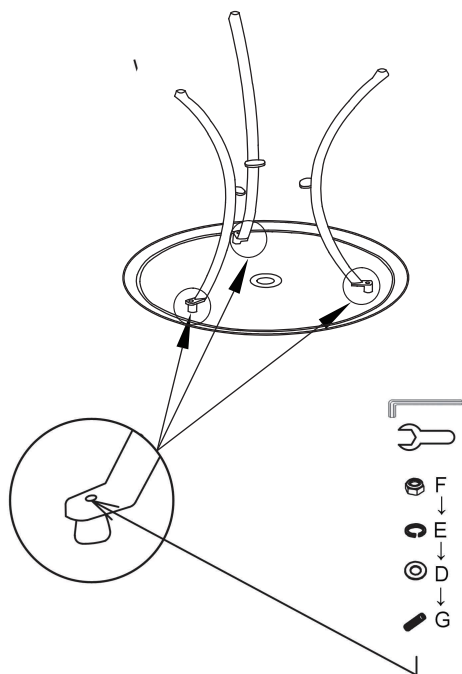

STEP 1

Attach the tabletop (A) to three legs (B) using 3 bolts (G), 3 washers (D), 3 spring washers (E), and 3 nuts (F). Do not over-tighten the screws.


Note: When you use bolt (G) with the hollow end facing up.

ASSEMBLY INSTRUCTIONS



CAVEAT

Note: Please only tighten any bolts once all bolts place correctly and the product is lying flat. If you tighten one bolt, it may cause other bolts to get out of position.

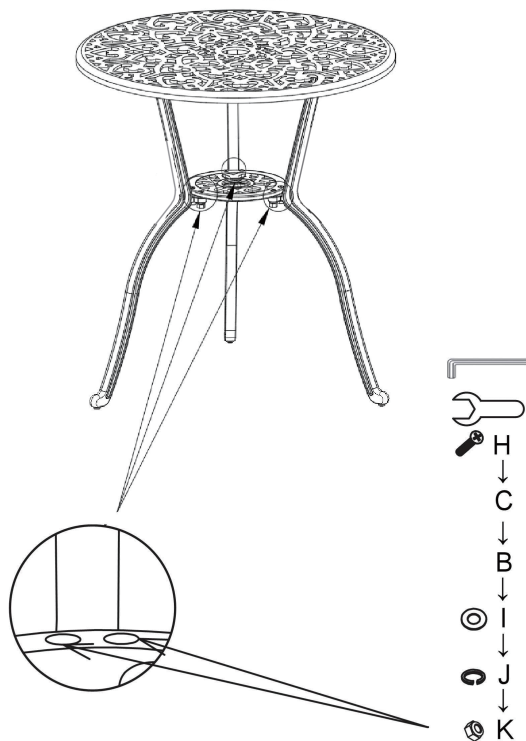

STEP 2

Attach the leg support (C) to three legs (B) using 6 bolts (H), 6 washers (I), 6 spring washers (J), and 6 nuts (K). Do not over-tighten the screws.

Upon completing the entire assembly and bolting up, you can tighten down all screws.

CARE AND MAINTENANCE

Follow the instructions for the product's material to ensure it stays in the best shape as long as possible. The information below is a general guideline.

Don't hesitate to get in touch with us to learn more.

- Only rinse it thoroughly with clean water to wash away dirt and grime. Never use abrasive cleansers on the furniture since they can attack the surface and leave behind scratch marks.
- For stubborn grime and stains, use a soft sponge and mild soapy water. Then dry it with a cloth or paper towel.
- Check the stability of the screws, nuts, and nut caps before each use. Then, tighten them up after one to two months' use whenever required.
- Avoid improper use, and be careful not to scratch or damage the surface with sharp objects.
- When you move your furniture, lift it rather than pulling or pushing it to avoid damaging the floor, legs, and mounting.