



①




E26 Max60W
Not included


②

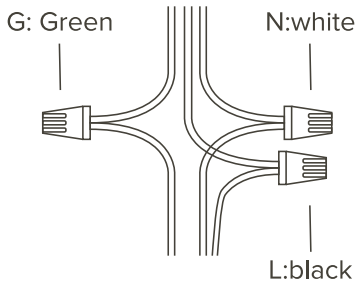


③

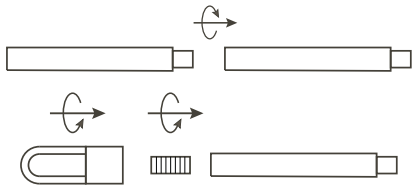


④

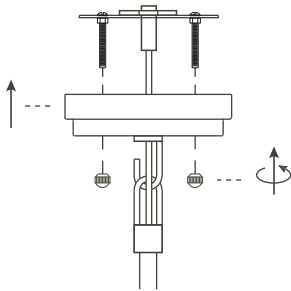


⑤

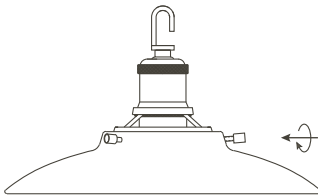

⑥

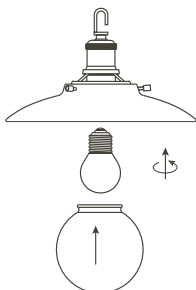


⑦

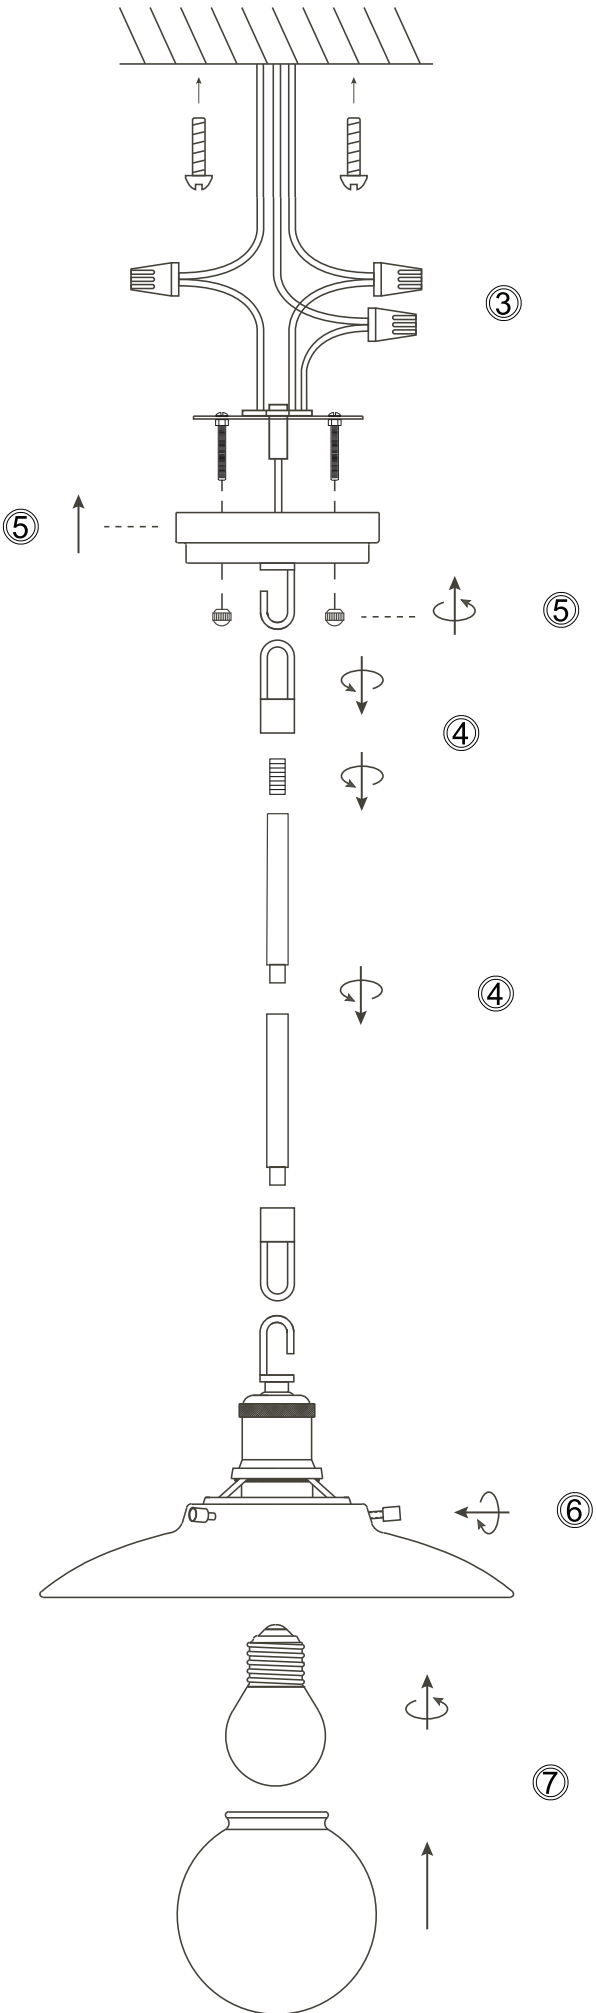

Bulb diameter not over than 50mm.
E26 Max60W Not included

Pendant Light Instruction



Step 1: Power Off


- Turn OFF power at your home's breaker panel.



E26 Max60W
Not included

Step 2: Prepare Fixture


- Ensure the fixture uses an E26 bulb base (bulb not included). Use bulbs rated for a maximum of 60W.

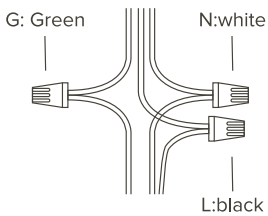

Step 3: Connect Wires


Match and connect fixture wires to ceiling wires::

- Connect the Black (Hot) wire from the fixture to the Black wire from the ceiling.
- Connect the White (Neutral) wire from the fixture to the White wire from the ceiling.
- Connect the Green or Bare Copper (Ground) wire from the fixture to the Green or Bare Copper wire from the ceiling.

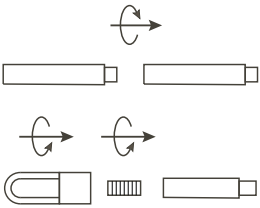


Step 4: Assemble the Rod

- Screw together the provided rods to achieve your desired hanging length. Ensure each rod is tightly secured to avoid movement.
- Install two threaded studs into two ends of the assembled rod. Attach a rod-end connector to each stud.




Step 5: Mount Fixture

- Attach the assembled rod to the canopy and securely mount the canopy to the ceiling bracket using provided screws.

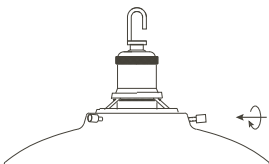

Step 6: Tight the glass

- Screw in three screws to lock the glass ball (leave a small gap between the screws and the glass to prevent thermal expansion and cracking).

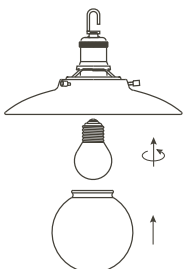

Step 7: Final Check

- Install your E26 bulb (max 60W) and double-check all connections. Turn the power back ON at the breaker panel and test your new pendant light.

Please contact us if you have any problems installing the lampshade. We will work you through the process.