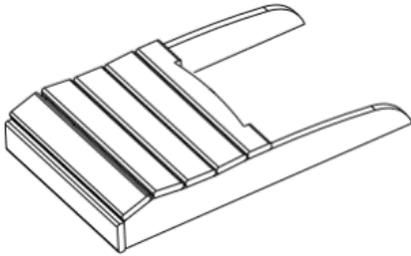


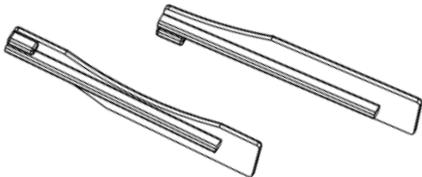




## PRE-ASSEMBLY PREPARATION:

	<p><b>THIS PACKAGE MAY CONTAIN SMALL ITEMS WHICH SHOULD BE KEPT AWAY FROM CHILDREN</b></p> <ul style="list-style-type: none"> <li>▪ Please check that all parts and hardware are included before beginning assembly.</li> <li>▪ Save all packing materials until assembly is completed to avoid accidentally discarding small parts</li> <li>▪ Read through the preparation and assembly instructions in full before beginning assembly.</li> <li>▪ Please use <b>CAUTION AND CARE WHEN LIFTING</b> the product to avoid personal injury and (or) damage to the product.</li> <li>▪ For ease of assembly, <b>2 adults</b> are recommended; Assembly time: Approximately 30 minutes.</li> </ul>
---	--


## PART LIST:

<b>A. Seat-1pc</b>	<b>B. Back-1pc</b>		<b>C. Front legs-2Pcs</b>
			
<b>D.Arms-2Pcs</b>	<b>E. Back seat beam-1Pc</b>	<b>P. Folding Bracket 2 Pcs</b>	<b>O. Front Leg Support Bar</b>
			

## HARDWARE LIST:

<b>F. Bolts 2.4"-2Pc</b>	<b>G. Bolts 2.55"-2Pcs</b>	<b>H. Bolts 2.0"-2Pcs</b>	<b>I. Bolts 2.75"-2Pcs</b>	<b>J. Screw 1.50" – 6 pcs</b>
				
<b>Q. Screw 1.5" – 2 pcs</b>	<b>K. Washer – 8Pcs</b>	<b>L. Lock nut- 8Pcs</b>	<b>M. Allen wrench 1Pc</b>	<b>N. Wrench 1Pc</b>
				

## STRUCTURE DIAGRAM:

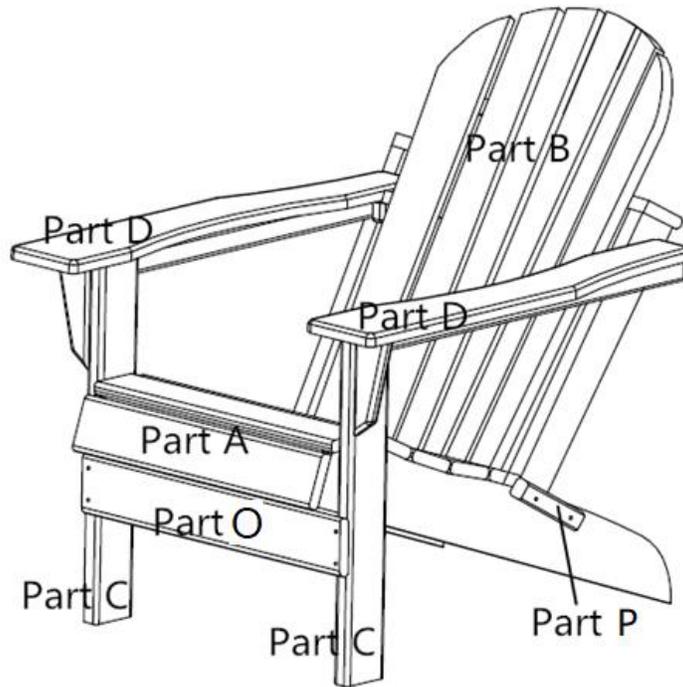


## STEP-BY-STEP ASSEMBLY:

### STEP 1:

- Attach front legs part ( C ) to seat part ( A ) with bolt ( F ) together with washer ( K ) and Lock Nut( L ).
- Then attached front leg support bar ( O ) use 4 pcs screw(J)


**Important: Do not over tighten the bolts**

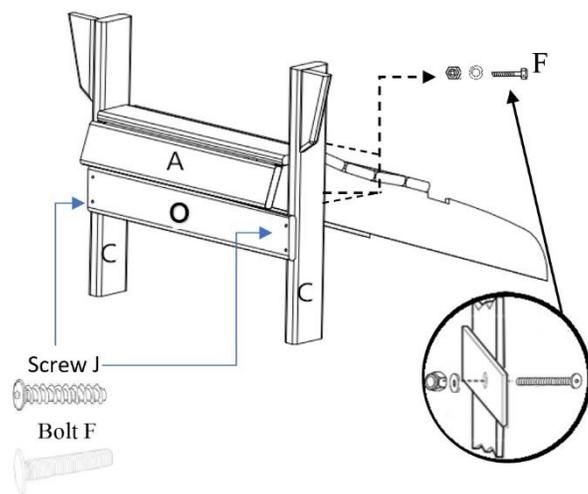

### STEP 2:

- Attach both Arms(D) to front legs using bolt (G), secure them with washer(K) and nut(L)

**Important: Do not over tighten the bolts**

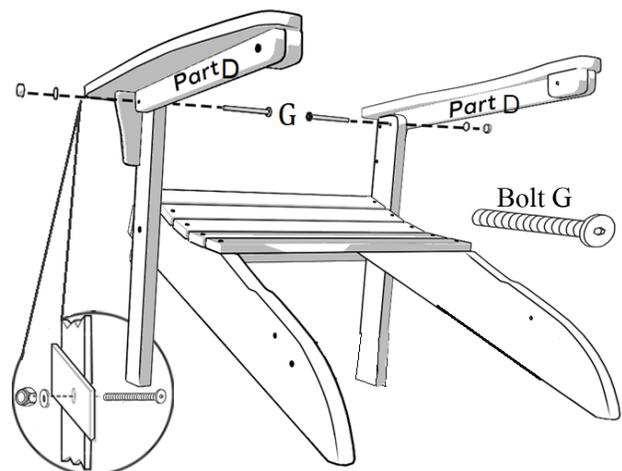


**STEP 3:**

- Attach the Back(B) to the end of the arm rest used Bolt (I) with Washer (K) and Nut (L).
- Then attach one end of folding bracket Part (p) to the bottom of the Back(B) using Screw (Q);
- Then attach another end of the Part (P) to the back leg of the seat using Bolt (H) with Washer (K) and Nut (L)

**Important: Do not over tighten the bolts**

**STEP 4:**

Attach Back seat beam(E) to rear leg using Screw (J).

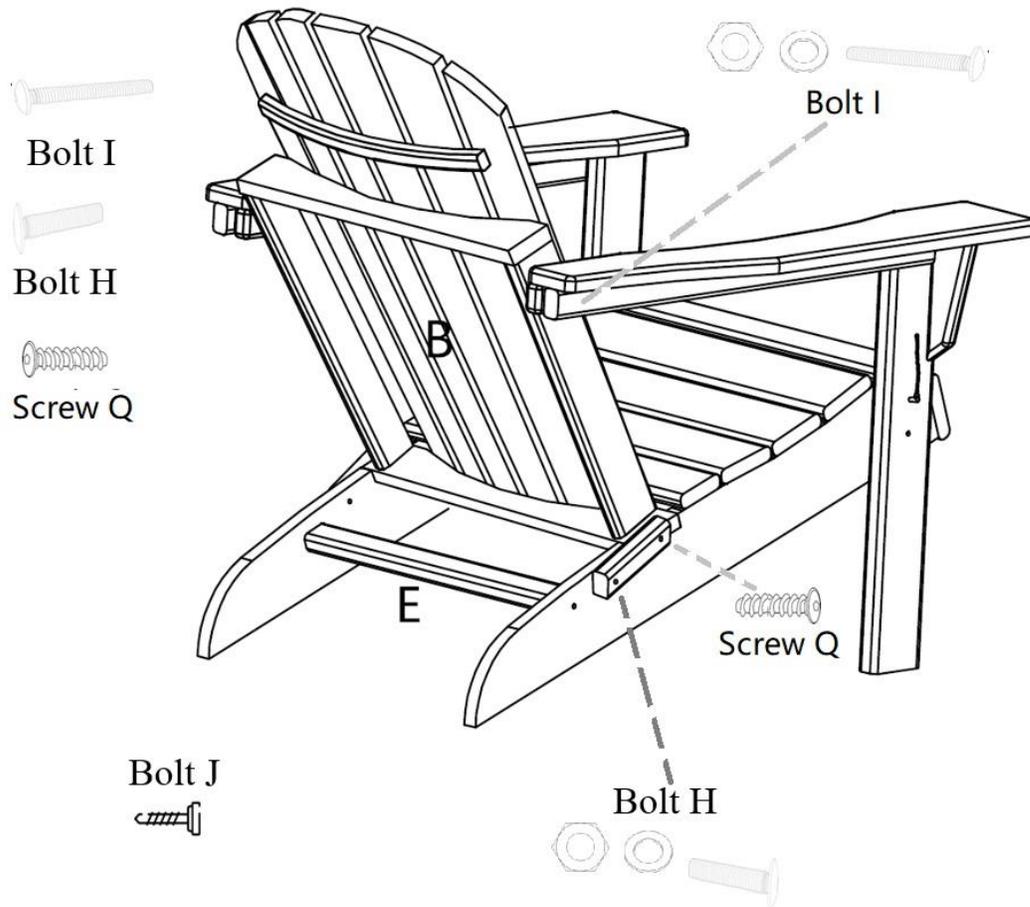**Furniture care**

Routine cleaning of the furniture can be completed with only warm water and soap, while bleach may be mixed with the water (25% Bleach, 75% Water) for extra cleaning power. A stiff bristle brush can help to remove any particles from between the simulated wood grain.