ASSEMBLY INSTRUCTIONS

604B DAYBED WITH LIFT-UP TRUNDLE

A Post A




2PCS

B Post B




2PCS

C LSF Arm




1PC

D RSF Arm




1PC

E Back Frame




1PC

F Rail




2PCS

G Trundle Rail




2PCS

H Trundle End Rail




2PCS

I Trundle Leg




2PCS

J Trundle Caster




4PCS

K Slat




42PCS

L Slat Spacer




40PCS

M Slat Connector




84PCS

N Bracket




4PCS

O Bolt
5/16" x 40mm




4PCS

P Bolt
1/4" x 55mm




6PCS

Q Bolt
1/4" x 19mm




22PCS

R Bolt
5/16" x 19mm




8PCS

S Bolt
5/16" x 34mm



4PCS

T Nut
5/16"




8PCS

U Allen Key
4mm x 100mm




1PC

V Wrench
1/4" - 5/16"




1PC

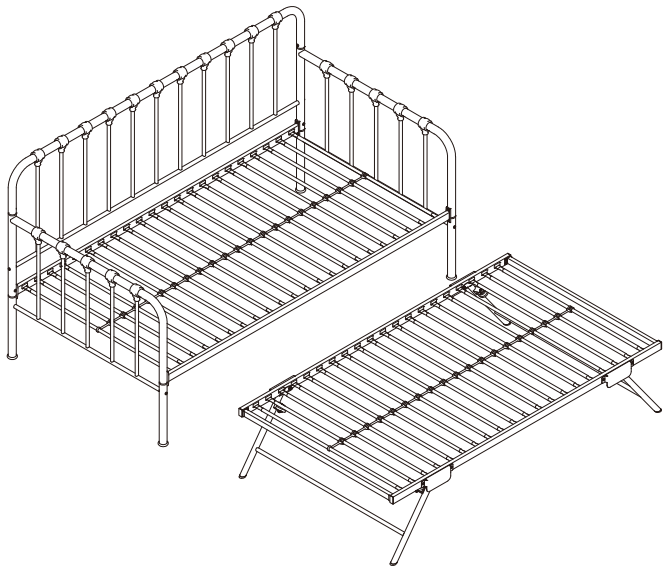


The above page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.


1 Attach Post (A & B) to LSF Arm (C) using Bolt (Q & P) with Allen Key (U).

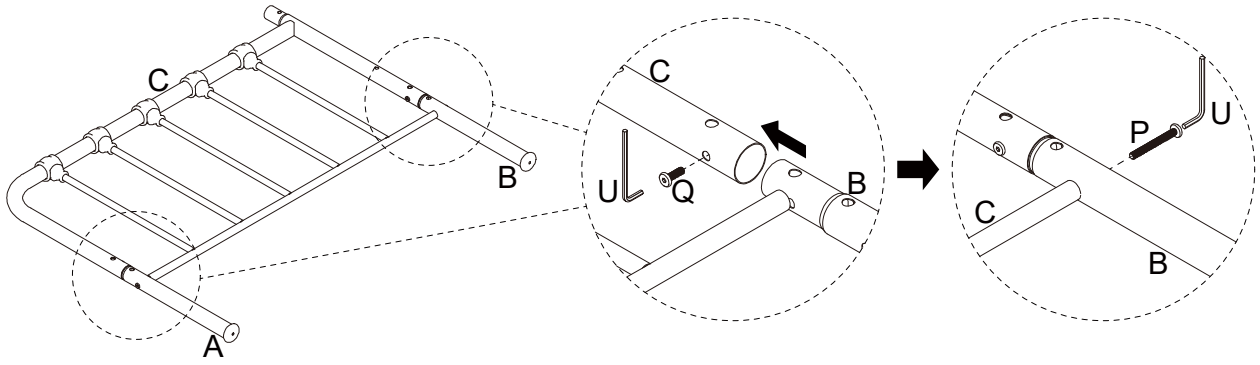


2 Attach Post (A & B) to RSF Arm (D) using Bolt (Q & P) with Allen Key (U).

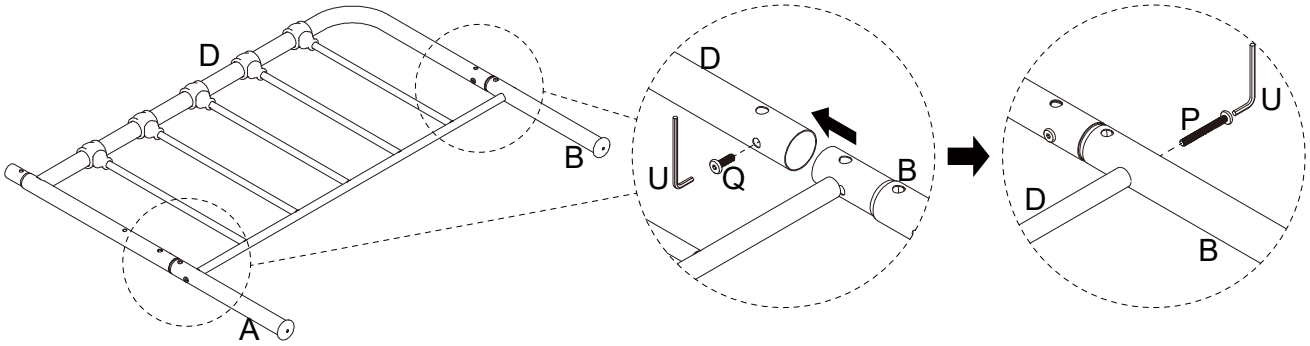


3 Attach Back Frame (E) to Arm (C & D) using Bolt (Q & P) with Allen Key (U).

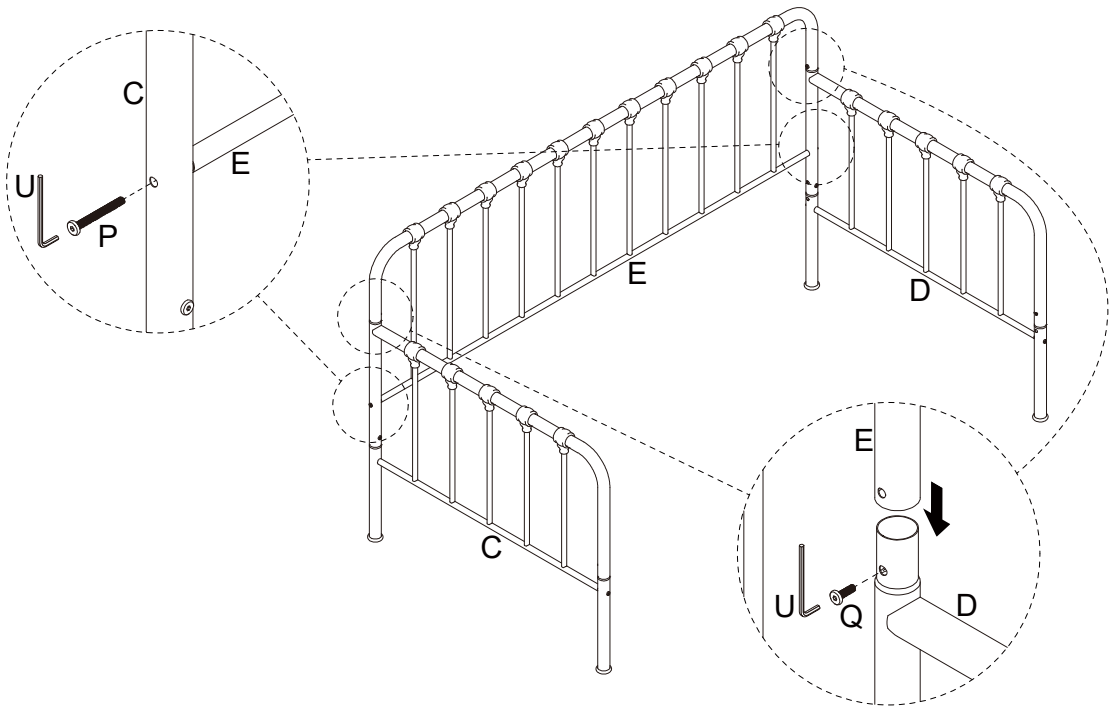


4 Attach Rail (F) to Post (A & B) and Arm (C & D) using Bolt (R) with Allen Key (U).

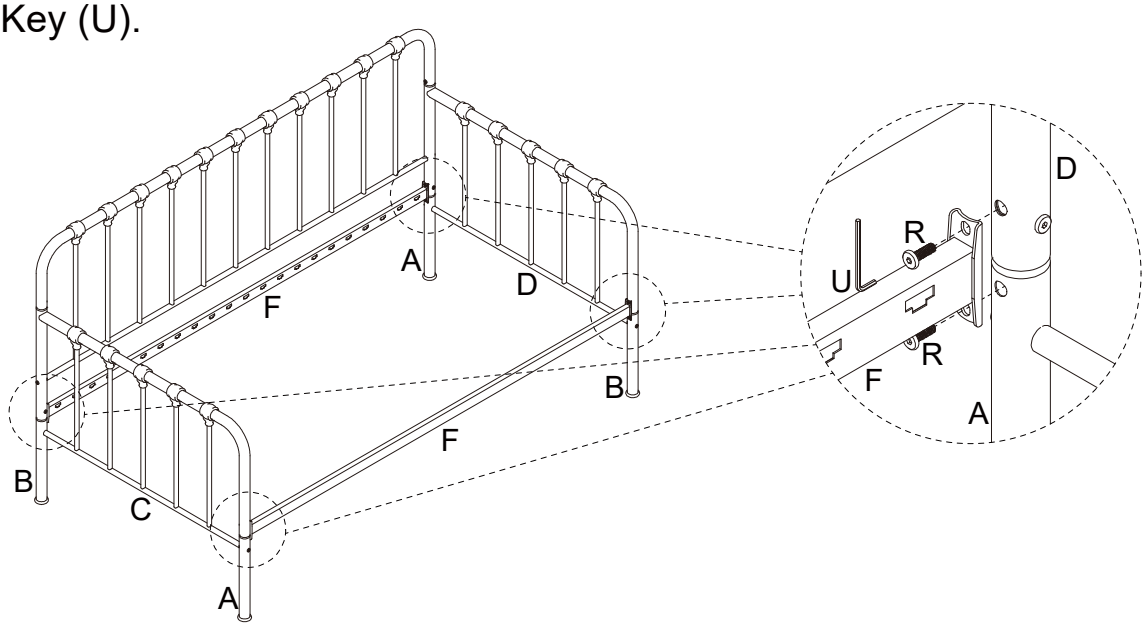


5 Insert Slat (K) into Rail (F) as shown. Then lock Slat Connector (M) to fix Slat (K).

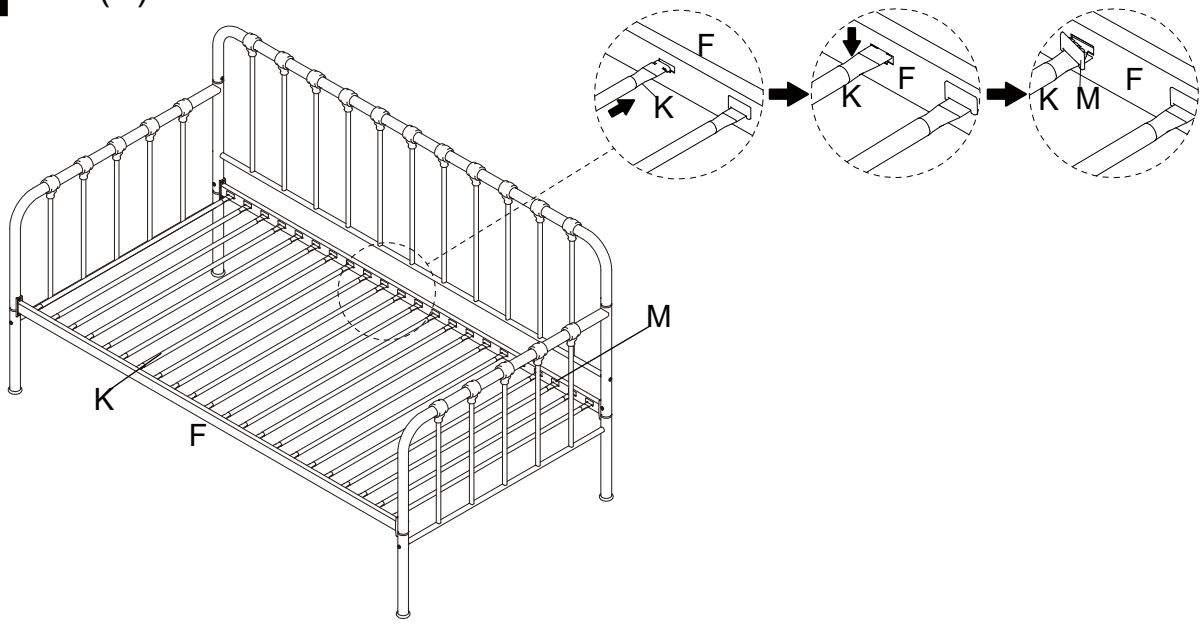


6 Connect Slat (K) using Slat Spacer (L) as shown.

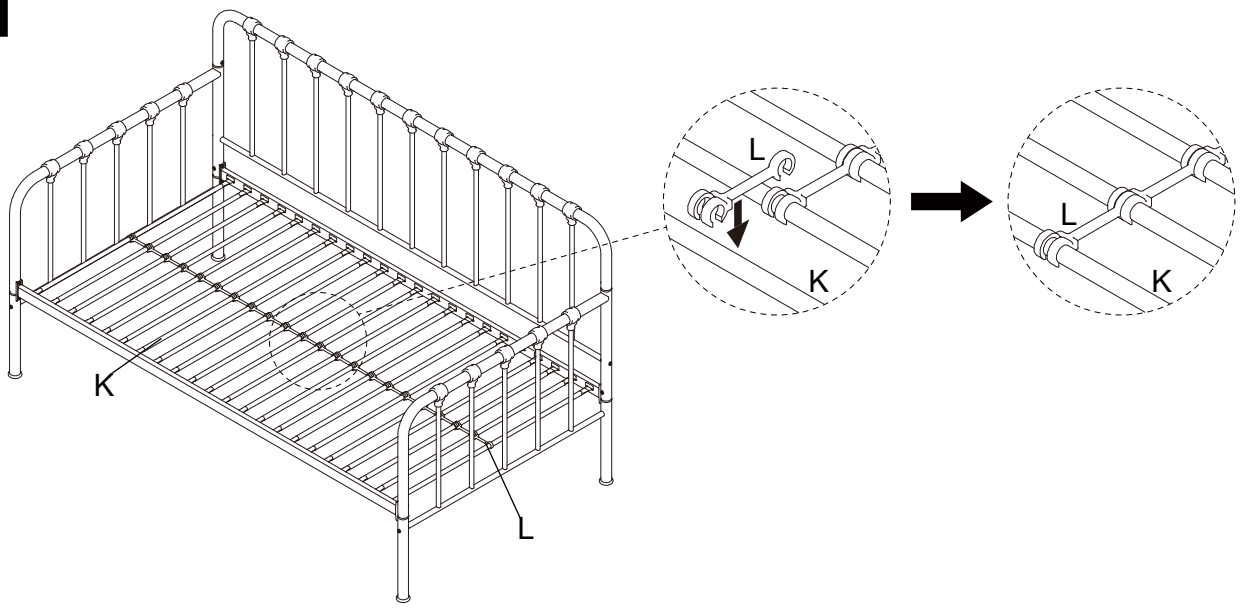


7 Attach Trundle Caster (J) to Trundle Leg (I) using Bolt (O) and Nut (T) with Allen Key (U) and Wrench (V).

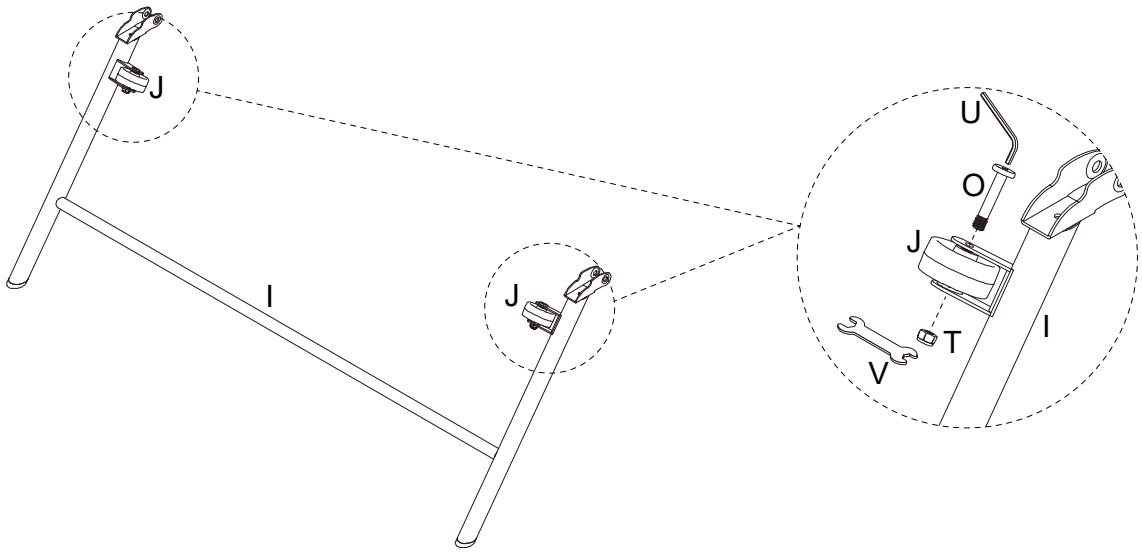


8 Attach Trundle End Rail (H) to Trundle Rail (G) using Bolt (Q) with Allen Key (U).

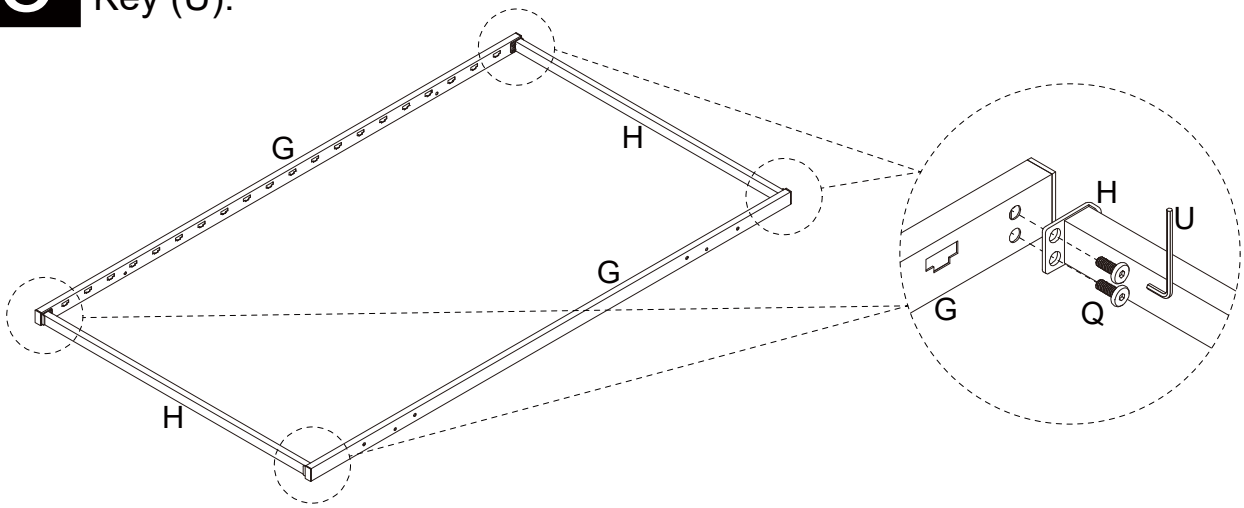


9 Attach Trundle Leg (I) to Trundle Rail (G) using Bolt (S) and Nut (T) with Allen Key (U) and Wrench (V).

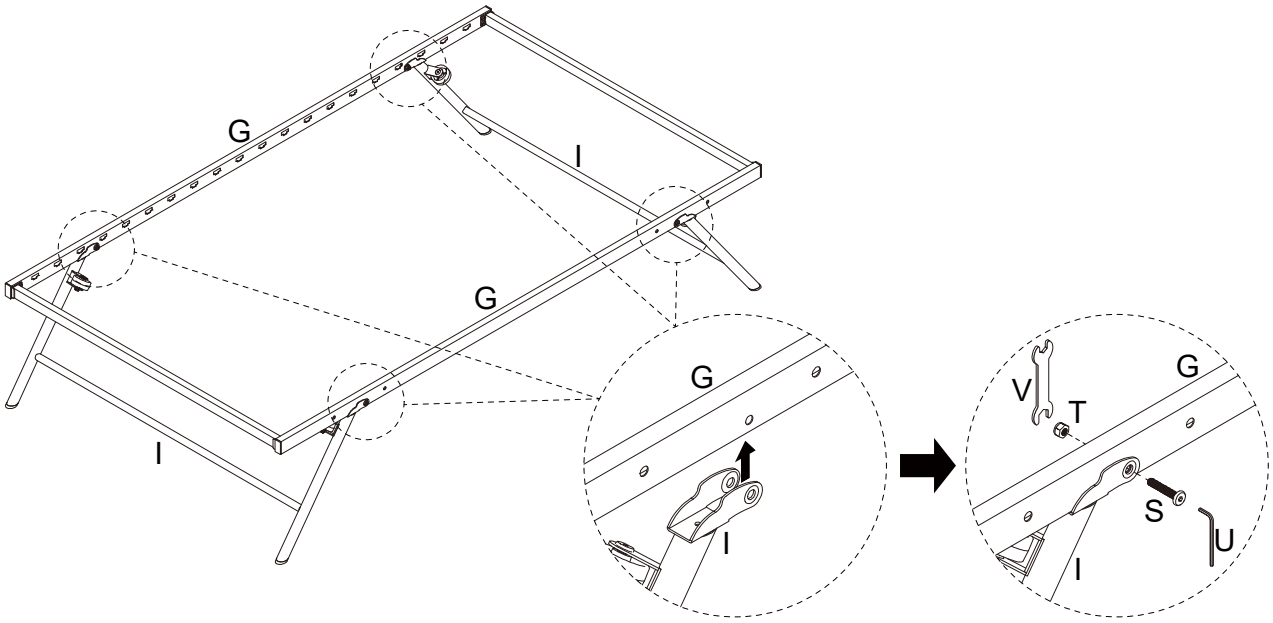


10 Attach Bracket (N) to Trundle Rail (G) using Bolt (Q) with Allen Key (U).

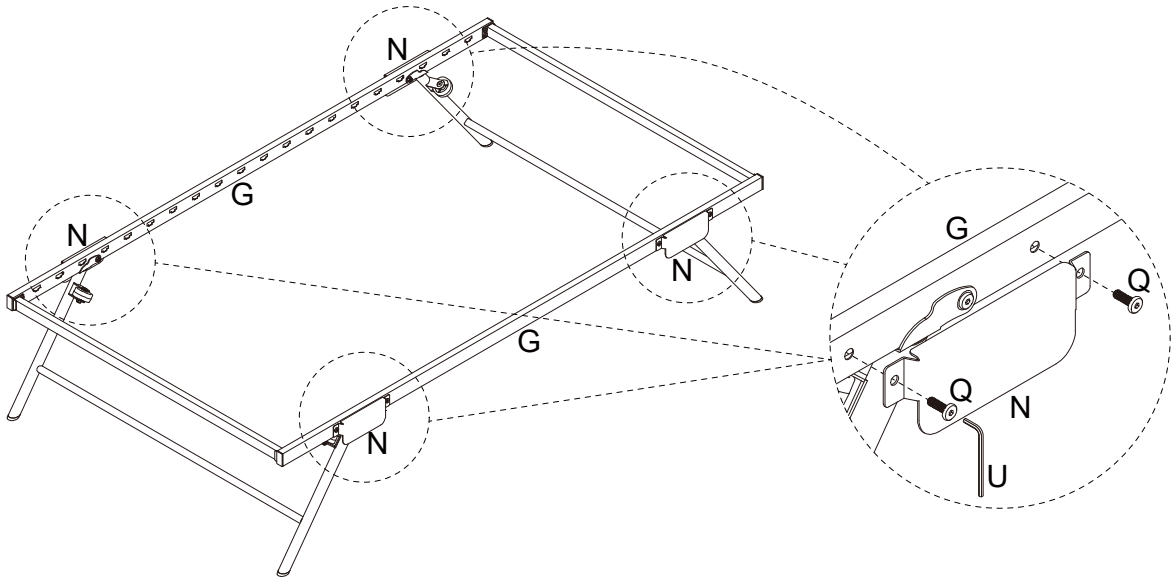

11 Insert Slat (K) into Trundle Rail (G) as shown. Then lock Slat Connector (M) to fix Slat (K).

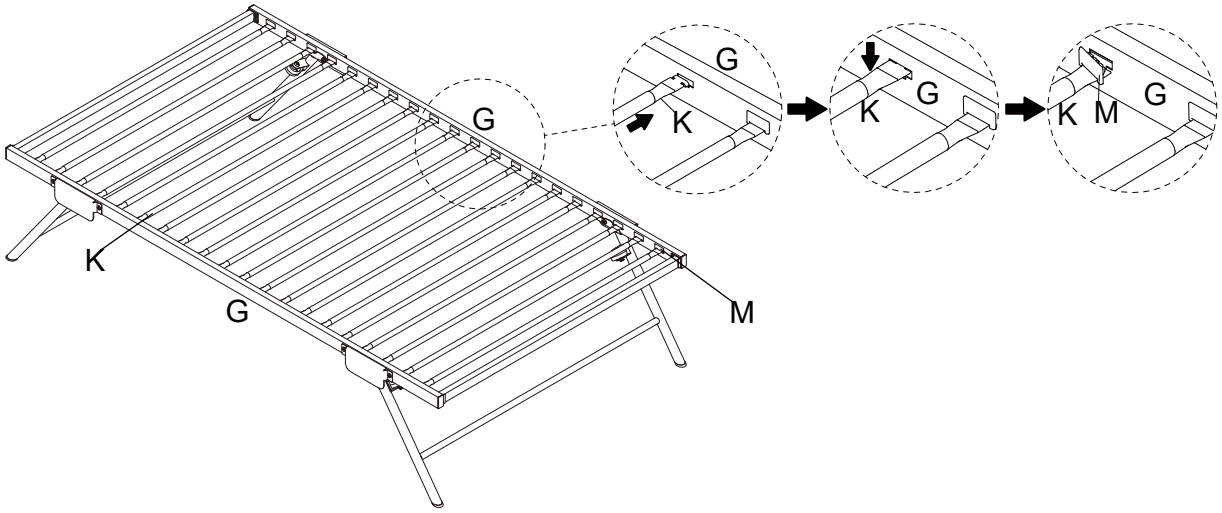

12 Connect Slat (K) using Slat Spacer (L) as shown.

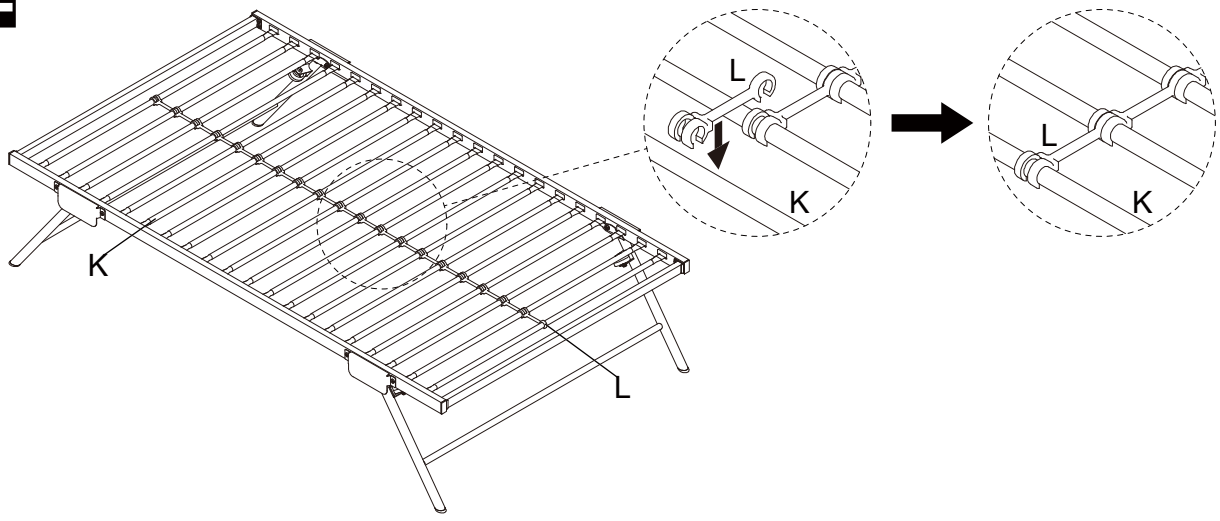

Cleaning & Care

Treat surfaces with care. Surfaces are resistant to scratches but are not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.