




LED Linear Strip Light (LS8060 Series)



UL-listed for damp locations, this energy-efficient LED fixture features adjustable wattage and CCT to meet various lighting needs. It delivers a 120° beam angle, CRI 80+, power factor greater than 0.9, and over 70% lumen maintenance at 50,000+ hours. The white-finish housing, PC lens, and aluminum heatsink provide a durable design and efficient heat dissipation. Suitable for operating temperatures from -4°F to +104°F (-20°C to +40°C), it is ideal for offices, schools, hospitals, hallways, stairwells, workshops, and other commercial or industrial applications.

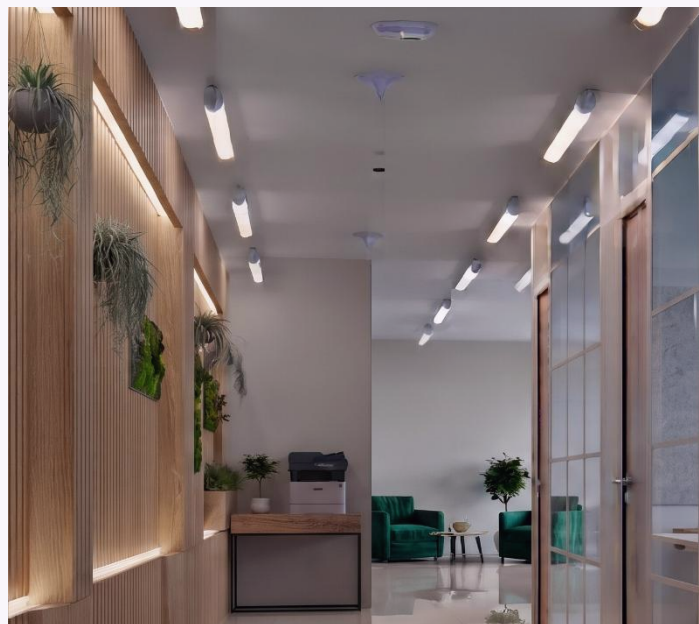

SPECIFICATION

Length	Watt	CCT	Lumens	Dimmable	Voltage
2FT	20W-17W-14W-11W-8W	3000K-3500K-4000K- 5000K-6500K Selectable	2572 lm Max	0-10V	120-277V
4FT	40W-35W-30W-25W-20W		5200 lm Max		
4FT	24W-36W-48W-60W-72W		10104 lm Max		
8FT	80W-70W-60W-50W-40W		10123 lm Max		

DIMENSIONS




8ft Front View



4ft Front View



2ft Front View






LED Linear Strip Light (LS8060 Series)


INSTALLATION

CCT Adjustable

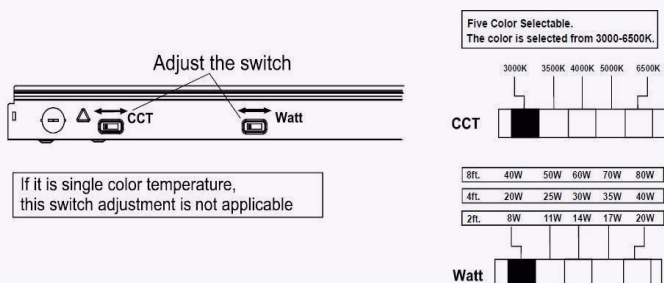


Adjusting the switch, and making the switch fix on the needed Watt and CCT.


Wiring Guide

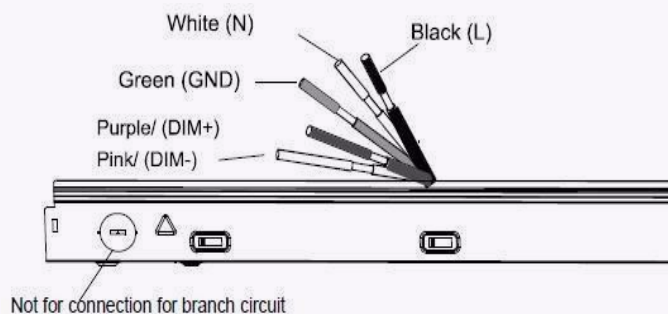


Suspension Installation

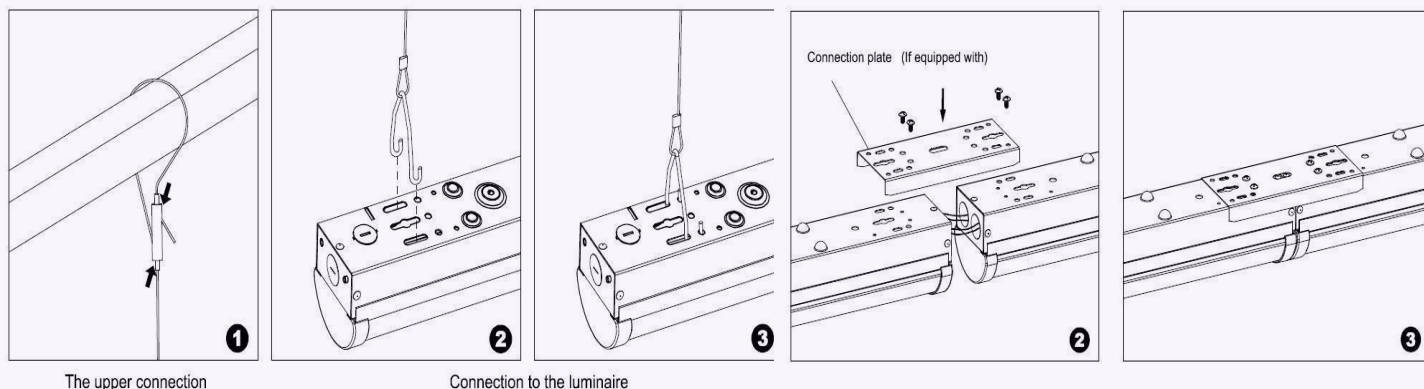

Surface Mount Installation

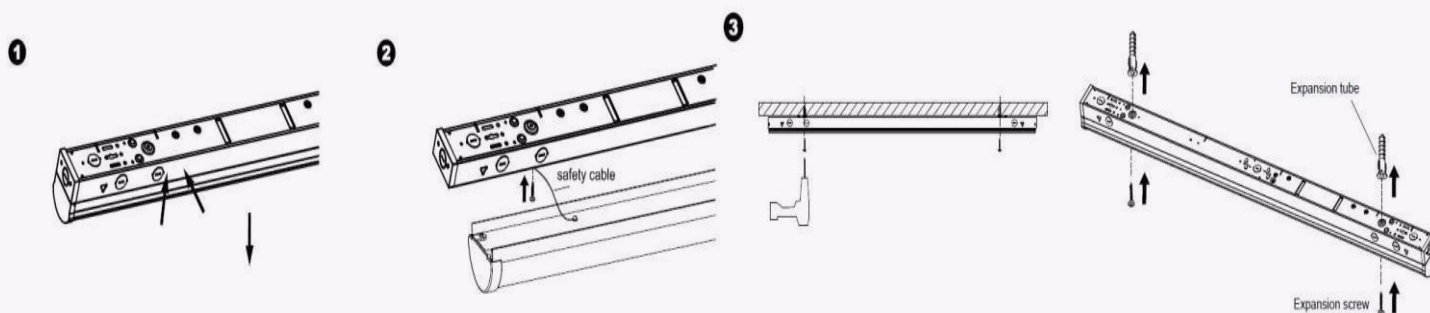

Connection Warning

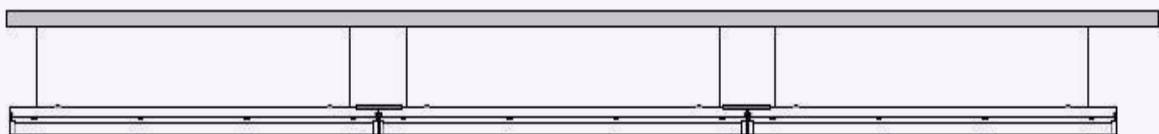

Note:

For safety standard,
please do not connect more than 4pcs 4ft LED lamp in a row;
do not connect more than 3 pcs 8ft LED lamp in a row.