

# ASSEMBLY AND INSTALLATION INSTRUCTIONS


Item No: SF004-2-CH

**WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.**

## NOTES:


1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.
3. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

## 2-LIGHT SEMI FLUSH

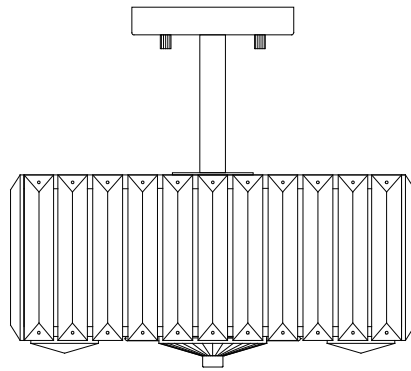


---


## TOOLS REQUIRED




Flathead  
Screwdriver



Phillips  
Screwdriver



Ladder



Wire Strippers



Pliers



Electrical  
Tape



Wire Cutters



Safety Glasses

## PREPARATION


Before beginning assembly of product, make sure all parts are present. Compare parts with package contents list and hardware contents list. If any part is missing or damaged, do not attempt to assemble the product. When the lamp is not installed finish, please don't throw away the package, so as not to leave the parts in the package.

# PART LIST AND HARDWARE LIST

PIECE	DESCRIPTION	QUANTITY
A	Mounting bracket	1
B	Green ground screw	1
C	Outlex box screw	2
D	Wire nut	3
E	Canopy	1
F	lock nuts	2
G	Central tube	1
H	Fixture body	1

## INSTALLATION

1. Attach the central tube(G) through the wire to the lamp body (H), and then lock the canopy(E) with the central tube(G).
2. Attach the mounting bracket(A) to the junction box with outlet box screw (C).
3. Attach the supply circuit ground wire (green or bare copper wire) to the the fixture ground wire,black to (black) and white to (white).
4. Attach the canopy through the Mounting screw(A1) and lock it with the lock nut (F) .
5. Install the 60W MAX type A19 Bulbs (not included) into each socket.

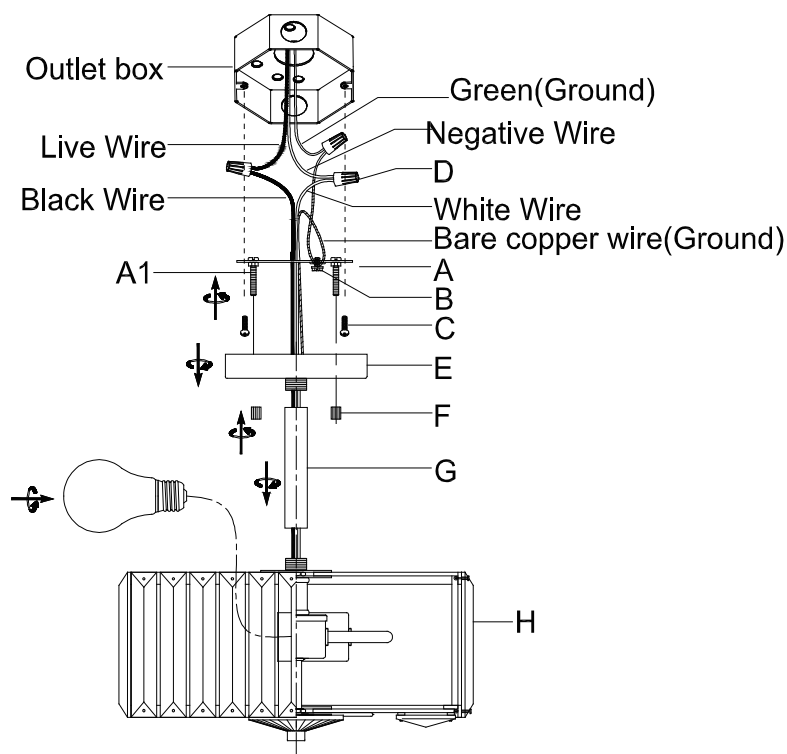

Thanks for using this product!