



Fairfax® | K-45412-G

Single-function showerhead, 1.75 gpm

Features

- Optimized sprayface with 48 nozzles delivers a more focused coverage of large water droplets
- Minimizes wasteful overspray and increases cleaning and hair-rinsing performance
- 1.75 gpm (6.6 lpm) flow rate.
- 1/2" NPT connection
- Coordinates with Fairfax faucets, accessories, and showering components to complete your bathroom
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Sustainability



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-29-2026 23:40 - US-CA

THE BOLD LOOK
OF **KOHLER**®

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Flow Rate
Shower/Rainhead Rated 1.75 gpm (6.6 l/min)
Maximum Flow:

Material

- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-7397 Shower arm and flange, 7-1/2" long
K-23723 Faucet cleaner

Technology


- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



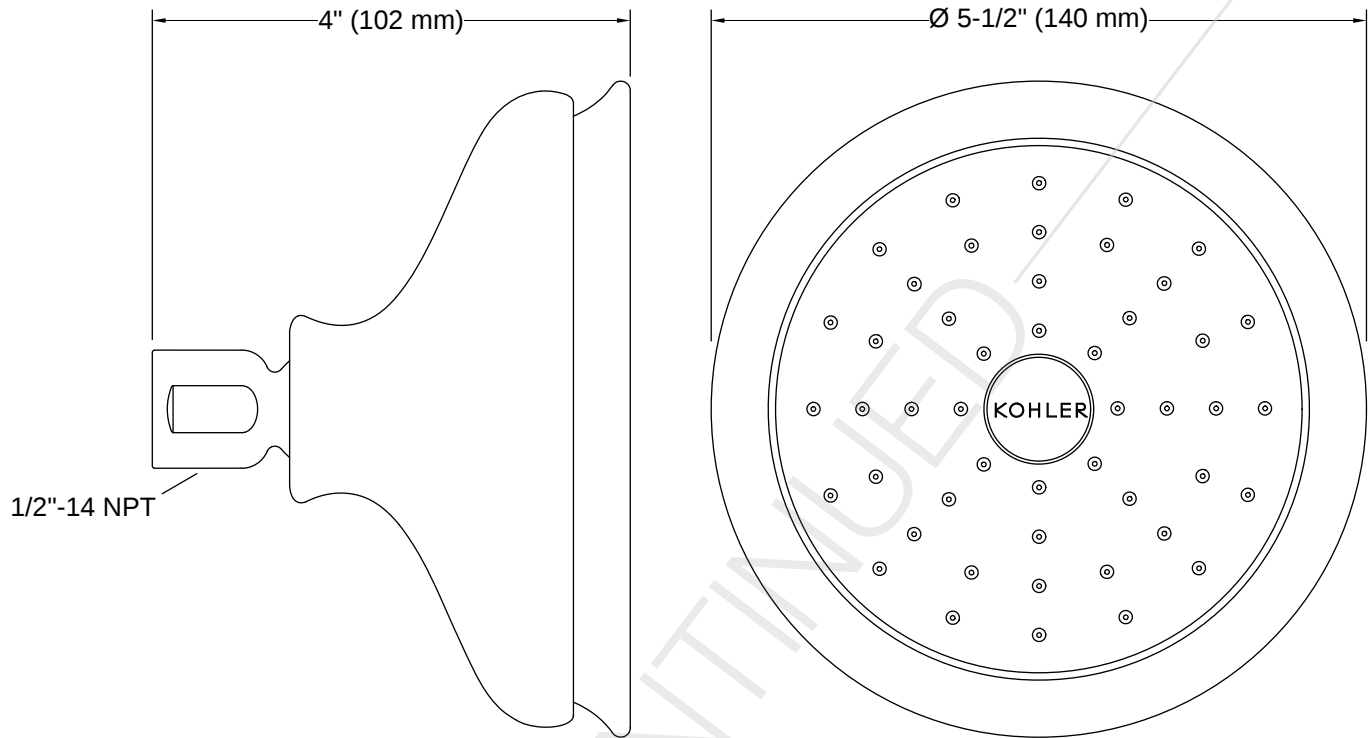

Installation

- Wall-mount

Installation Notes

Install this product according to the installation instructions.

For use with automatic compensating valves rated at 1.5 gal/min (5.7 l/min) or less.

