Installation Diagram

Adjust the lamp hanger to the appropriate length and tighten the screw.



Assemble the lamp main body

Step1:Fix both ends of the hanging chain to the lamp body and ceiling plate respectively, adjust the length and fasten firmly.

Step2: Thread the power cord through the hanging chain, arrange wires and adjust the length properly.

Step3: Connect the power wires, then hang and fix the ceiling plate onto the ceiling base.

Assemble the lamp base


Step 1: Remove the nut from the lamp pole.

Step 2: Connect the wires from the lamp pole to the wires from the lamp holder.

Step 3: Fasten the lamp pole and lamp holder with the nut, then screw the bulb into the lamp holder.

Step 4: Connect and secure the lamp pole to the lampshade using a nut.

Note: For installing the beaded fringe, assemble in a repeating sequence: bead chain → metal chain → bead chain... and so on. The lower layer has two sets of holes: install the metal chains in the upper holes, and the bead chains in the lower holes.

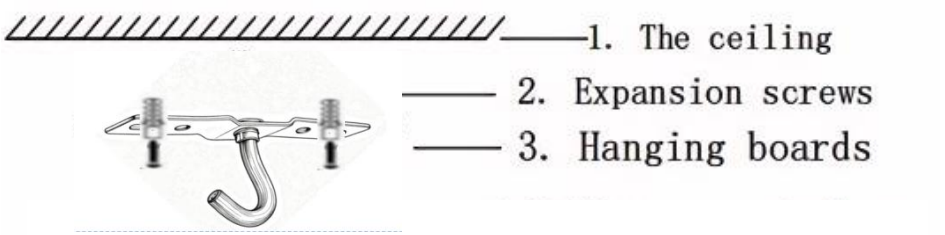

1. THIS PRODUCT IS SUITABLE FOR THE POWER OF 110V.

2. PLEASE WEAR GLOVES AS INSTALLMENT AND AVOID ROT ON THE PLATE SURFACE.

3.PLEASE TURN OFF THE POWER SOURCE BY THE TIME OF CLEANING,AND MUST USE SOFT CLOTH.

4. PROHIBITED TO USE CORROSIVE DETERGENU.

5. MUST INSTALL IN THE STABLE PLACE AND DO USUALLY PERIODICAL CHECKING.