

artos

F903A-56TK

INSTALLATION GUIDE

pressure balance mixer trim
kit only squ+letterbox



BRUSHED NICKEL(BN)



CHROME(CH)



BLACK(BK)

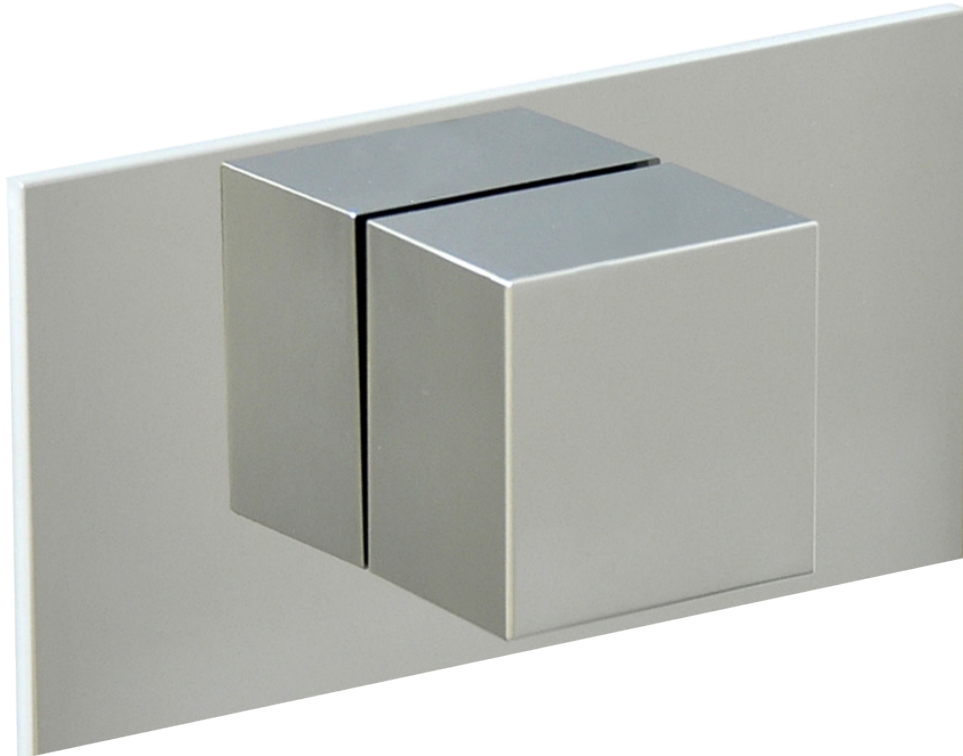

artos

F903A-56TK

pressure balance mixer trim
kit only squ+letterbox

OPERATING SPECIFICATIONS

for associated valve | F903A-40V0



MIXED WATER TEMPERATURE

Maximum: 120°F

HOT WATER SUPPLY TEMPERATURE

Maximum: 185°F

Minimum: 50°F

Advisable: 150°F- 160°F

Minimum difference between hot mixed temperature 50°F

OPERATING PRESSURE

Maximum: 125psi

Minimum: 20psi

Recommended: 30psi- 95psi



Operating pressures (on hot and cold lines) should be kept as balanced as possible, in order to assure the maximum efficiency.

artos

F903A-56TK

PRODUCT DIMENSIONS

pressure balance mixer trim
kit only squ+letterbox

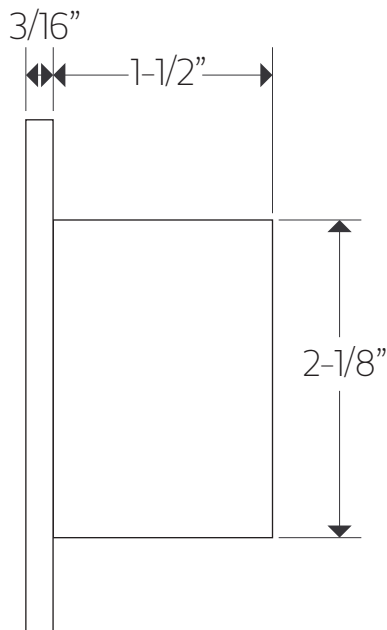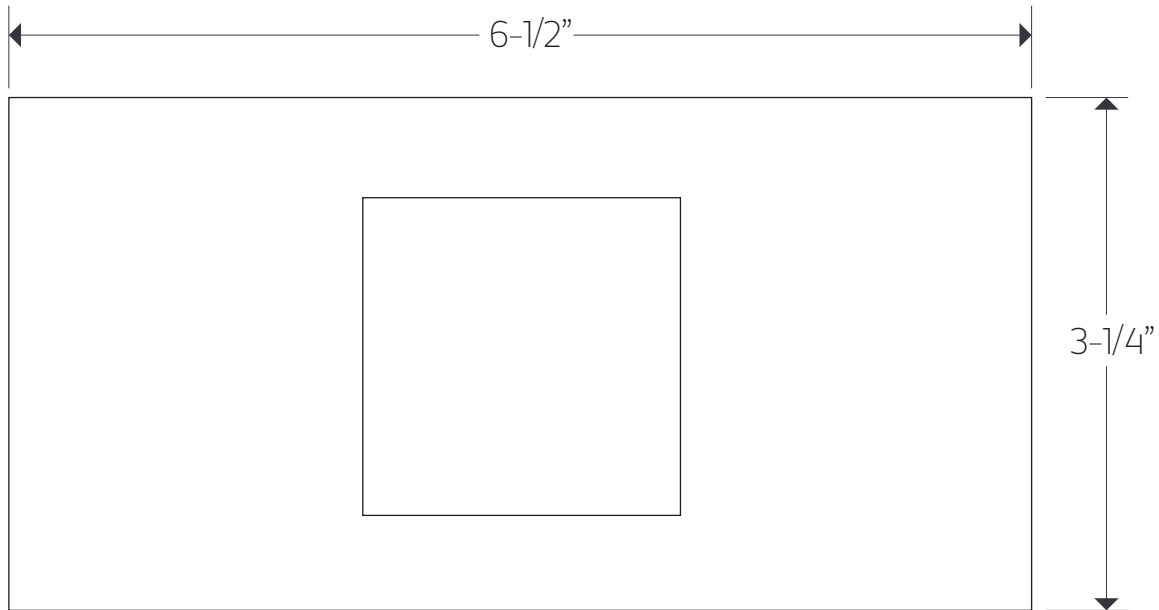


artos


F903A-56TK

pressure balance mixer trim
kit only squ+letterbox

STEP 1

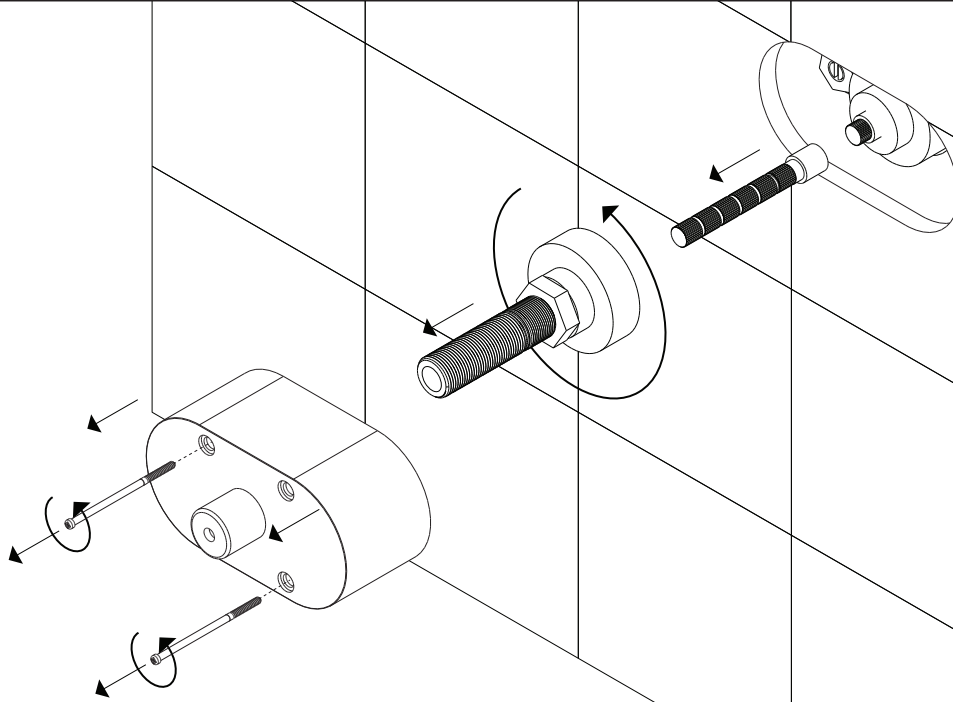


STEP 2

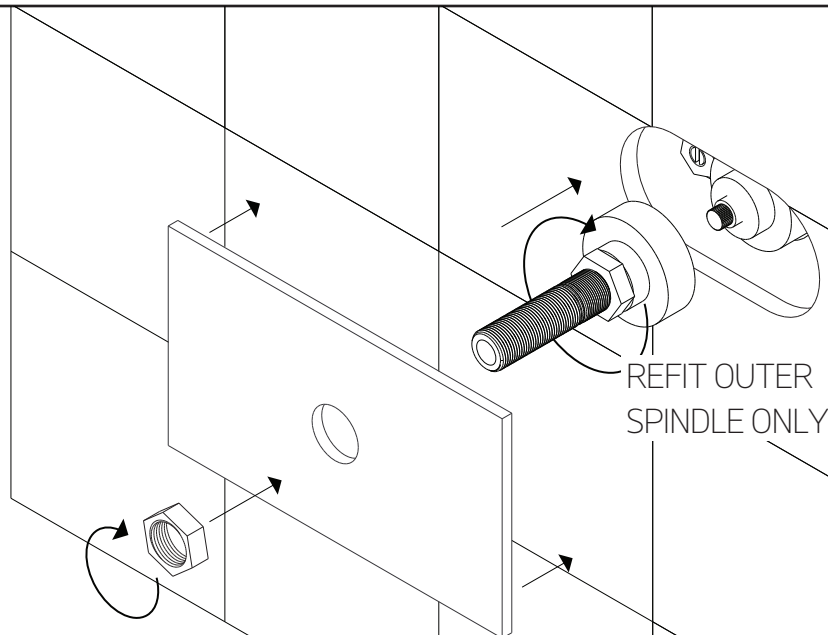


INSTALLATION STEPS

STEP 3

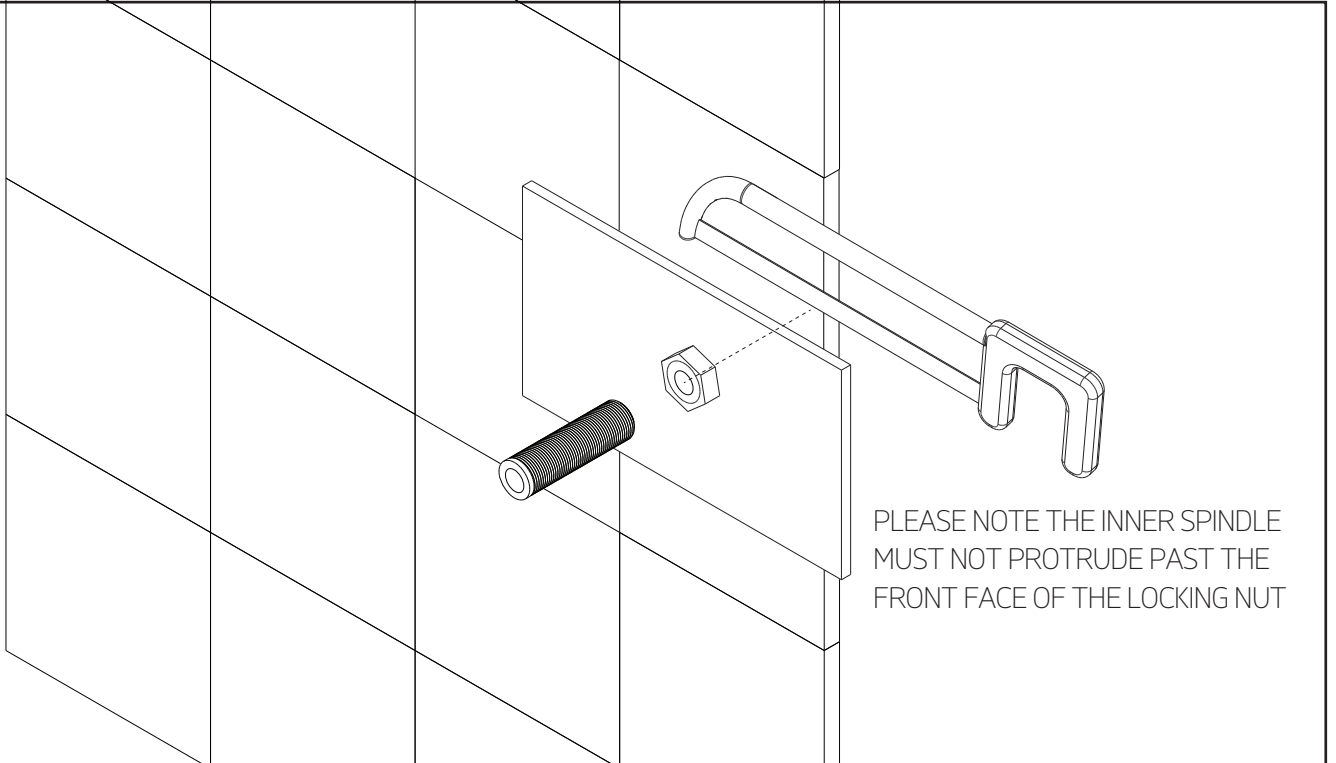

STEP 4

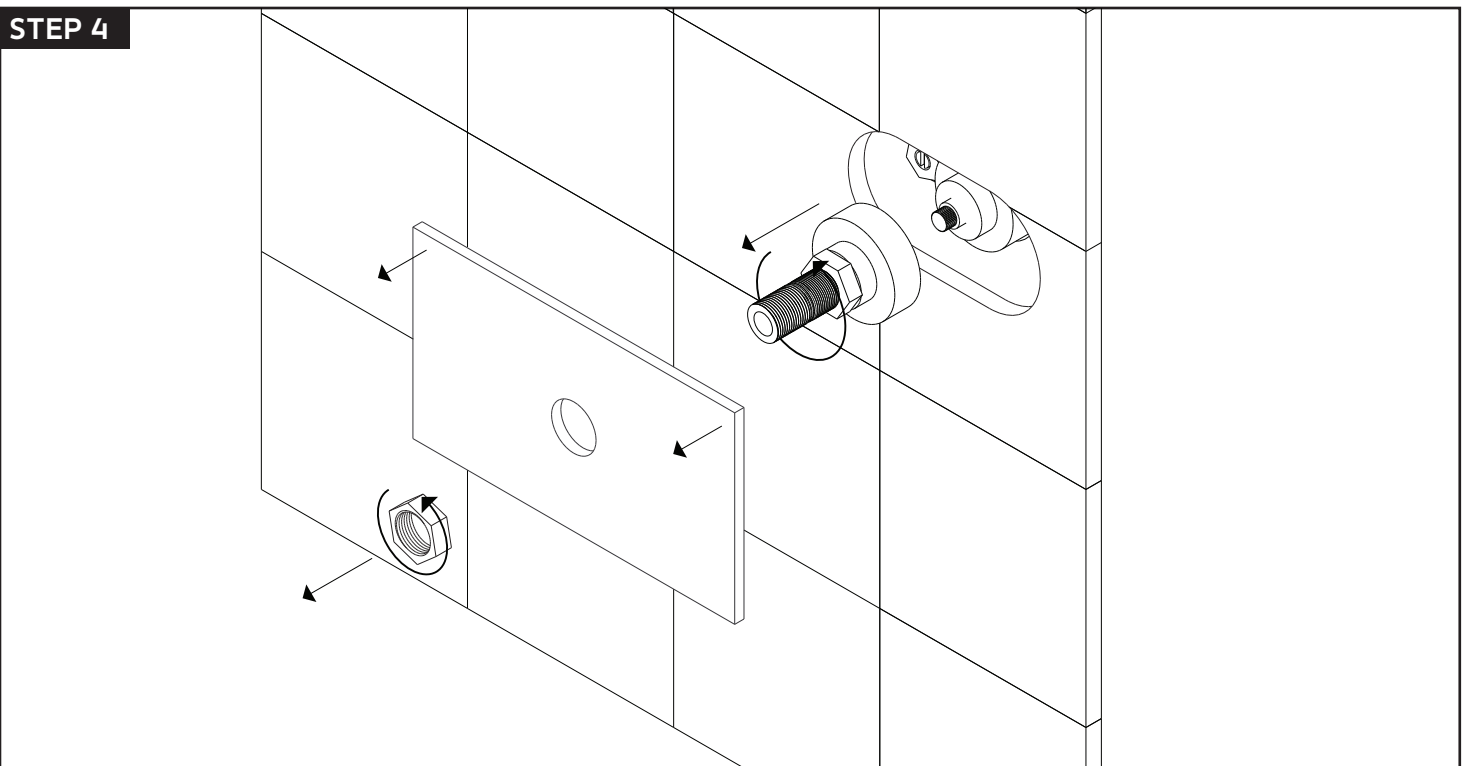


artos


F903A-56TK

pressure balance mixer trim
kit only squ+letterbox

STEP 5

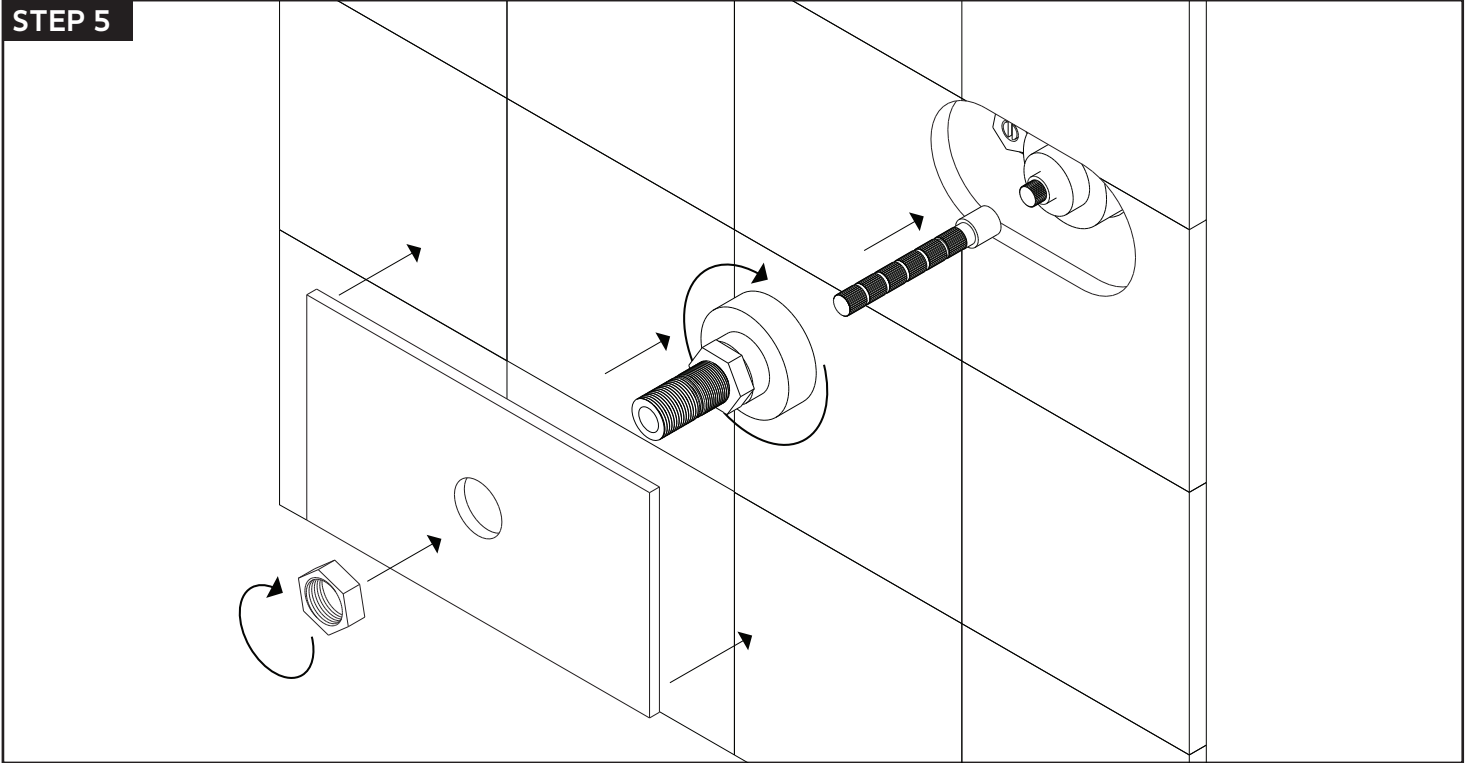


STEP 6

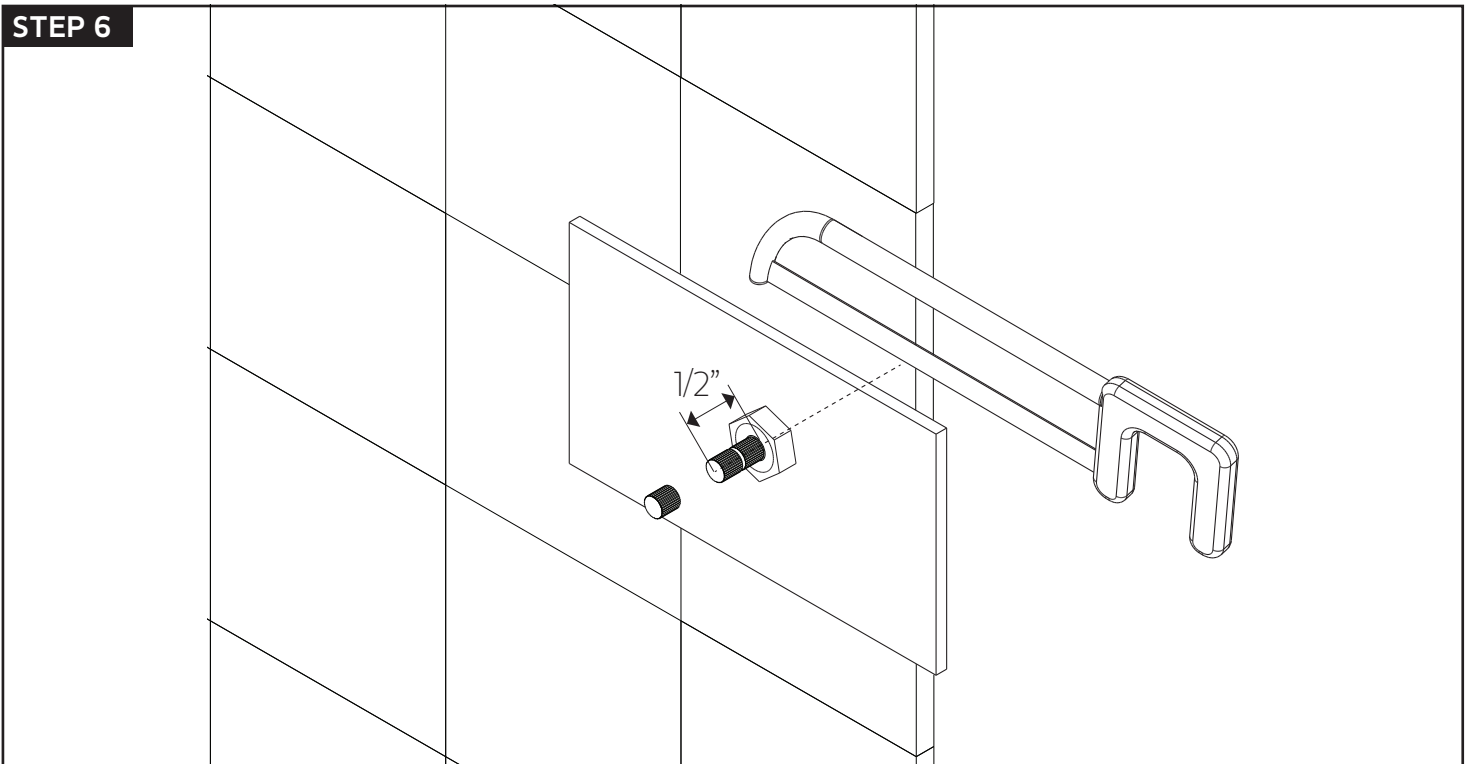

INSTALLATION STEPS

STEP 7


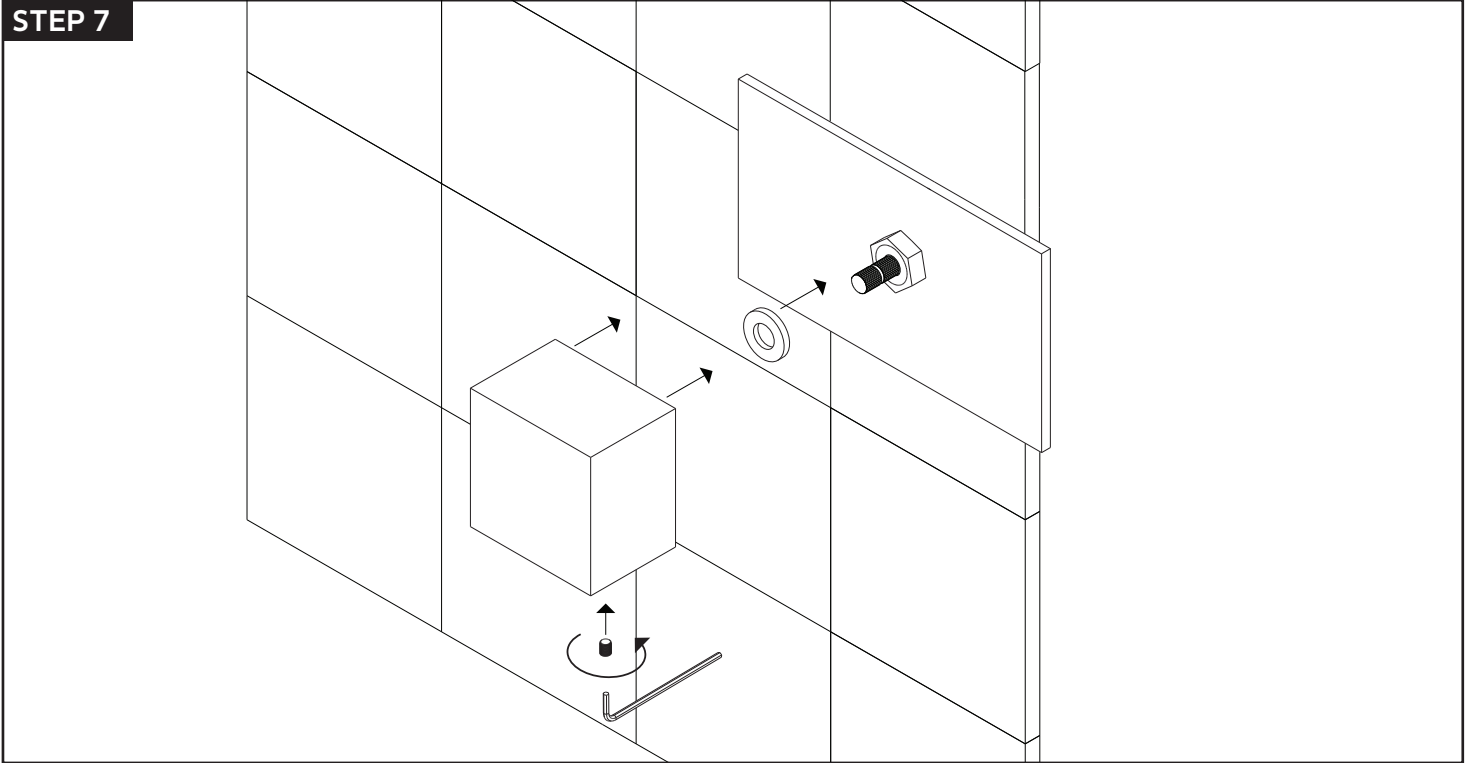


artos

F903A-56TK

pressure balance mixer trim
kit only squ+letterbox

PARTS BREAKDOWN

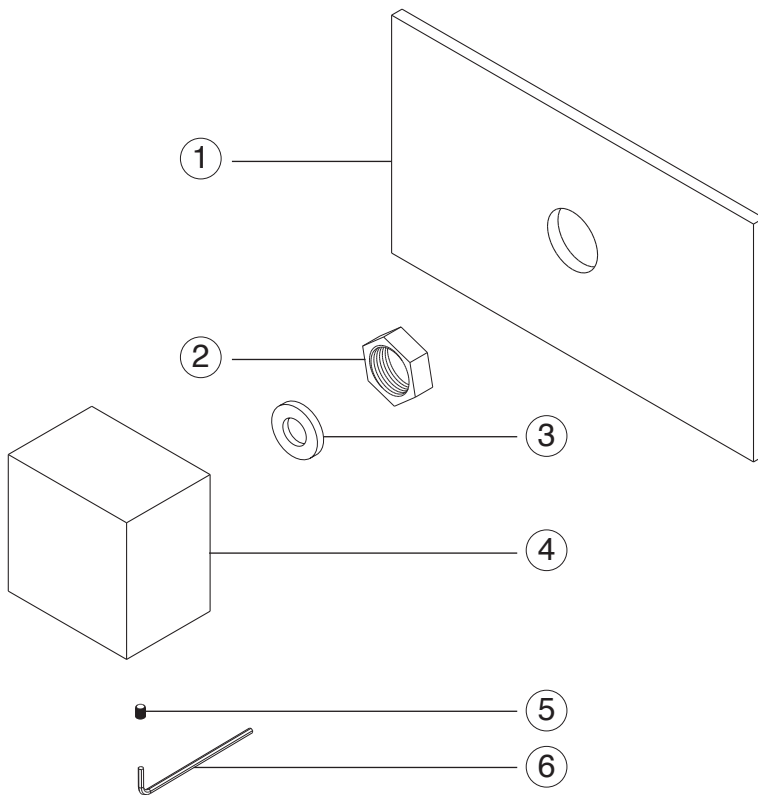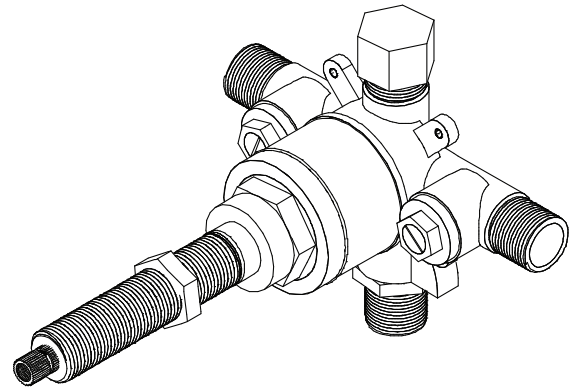

- ① ESCUTCHEON
- ② LOCKING NUT
- ③ NYLON WASHER
- ④ HANDLE
- ⑤ SET SCREW
- ⑥ ALLEN WRENCH