


INSTRUCTIONS



Oaks Aura <https://www.OaksAura.com>


Please contact us directly for any further assistance
EmailAddress: Support@oaksaura.com
Hotline: (303)-970-9898

MADE IN CHINA

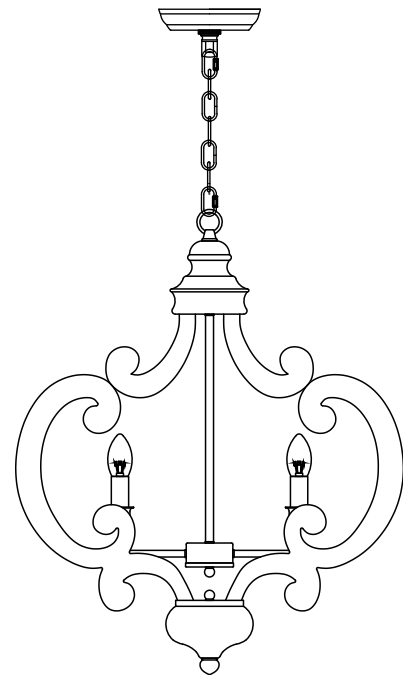

OaksAura <https://www.OaksAura.com>


①

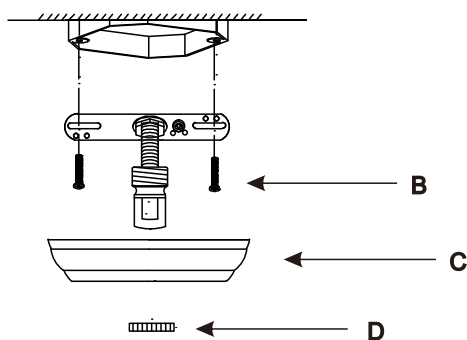

Step1.

1. Remove the Mounting Bracket(A) from Ceiling Canopy(C) by loosening Circle Ring(D).
2. Then Secure Mounting Bracket(A) to ceiling junction box by Mounting screw(B).

②

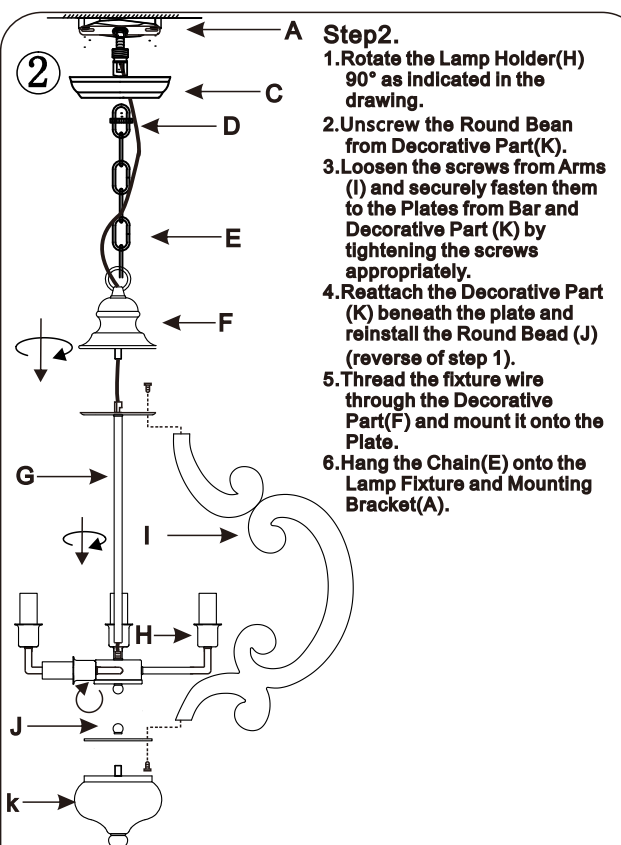

Step2.

1. Rotate the Lamp Holder(H) 90° as indicated in the drawing.
2. Unscrew the Round Bean from Decorative Part(K).
3. Loosen the screws from Arms (I) and securely fasten them to the Plates from Bar and Decorative Part (K) by tightening the screws appropriately.
4. Reattach the Decorative Part (K) beneath the plate and reinstall the Round Bead (J) (reverse of step 1).
5. Thread the fixture wire through the Decorative Part(F) and mount it onto the Plate.
6. Hang the Chain(E) onto the Lamp Fixture and Mounting Bracket(A).

PLEASE READ INSTRUCTIONS IN THEIR ENTIRETY
PRIOR TO ASSEMBLY AND INSTALLATION.

SAFETY PRECAUTIONS:

- Please carefully examine the cord, lamp holder, switch, and all other parts for damages. If any damage or defect is found, please return this fixture.
- This fixture use E12 Medium Bulbs Max. 40W. To avoid the risk of fire, do not use bulbs that exceed the 40W limit. We suggest using LED Bulbs for lower energy consumption and longer life span.
- Installing this fixture requires connecting electric wires, these connections must be in accordance with local and National Electrical Code(NEC) standards, we suggest hiring a licensed electrician to do this.
- Recommended for indoor use only, please keep this fixture away from water or moisture.
- Wipe clean using a soft, dry cloth or static duster. Always avoid the use of harsh chemicals and abrasives to clean fixture as they may damage the finish.

ASSEMBLY & INSTALLATION GUIDE ITEMS YOU NEED

- Ladder
- Screwdriver
- Wire cutter/stripper
- Insulation tape
- 6 x E12 Bulbs (<40W)


GETTING STARTED

- Carefully unpack all accessories and parts.
- Place all components on a clean, flat and soft surface to prevent parts from getting scratched.
- Shut off your main electrical supply at the fuse box or circuit breaker. Just turning off the light switch is not sufficient to prevent electrical shock!

PAGE1

OaksAura <https://www.OaksAura.com>

④

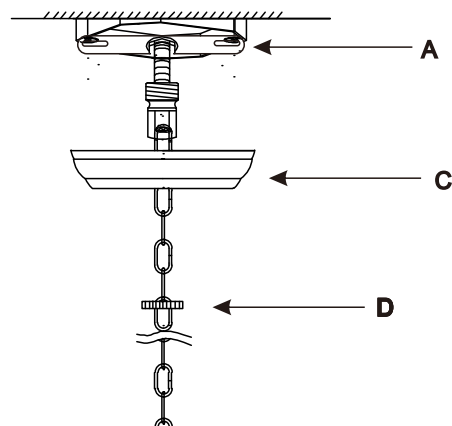


Step4.
Position Canopy (C) over Mounting Bracket(A) and tighten with Circle Ring(D).

PAGE 6

OaksAura <https://www.OaksAura.com>

③

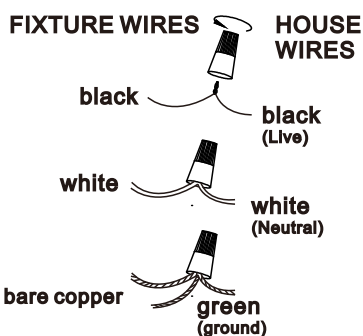

Step3.


- Connect black fixture wire to black supply wire and white fixture wire to white supply wire using wire caps(provided).Wrap connection with electrical tape.
- Connect ground wire from canopy with ground wire from junction box using a wire cap .Wrap with electrical tape for a more secure connection. If house does not have ground wire, attach grounding wire to green grounding screw marked GND.
- Tuck all wires carefully into the J-Box.

WARNING: Never connect grounding wire to black or white power supply wires. It is imperative that the outlet box in your home be properly grounded.

PAGE 5

OaksAura <https://www.OaksAura.com>

Enjoy your new Light

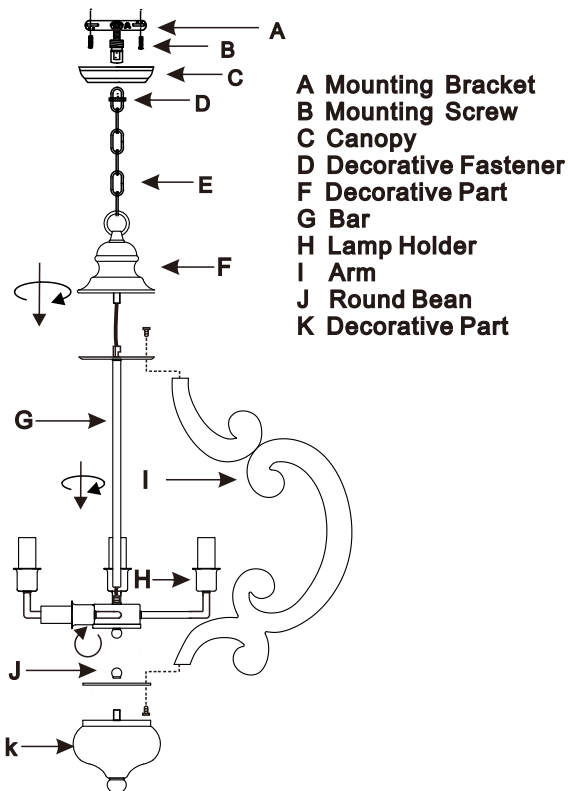

- A Mounting Bracket
- B Mounting Screw
- C Canopy
- D Decorative Fastener
- F Decorative Part
- G Bar
- H Lamp Holder
- I Arm
- J Round Bean
- K Decorative Part

PAGE 2

OaksAura <https://www.OaksAura.com>