

ASSEMBLY INSTRUCTION

STOOL

A Chair Seat




1 pc

B Chair Leg



4 pcs

C Bottom Ring



1 pc

D JCBC Bolt
M6 X 55mm




4 pcs

E JCBC Bolt
M6 X 35mm



4 pcs

F Spring Washer
M6




8 pcs

G Allen Key
5mm




1 pc

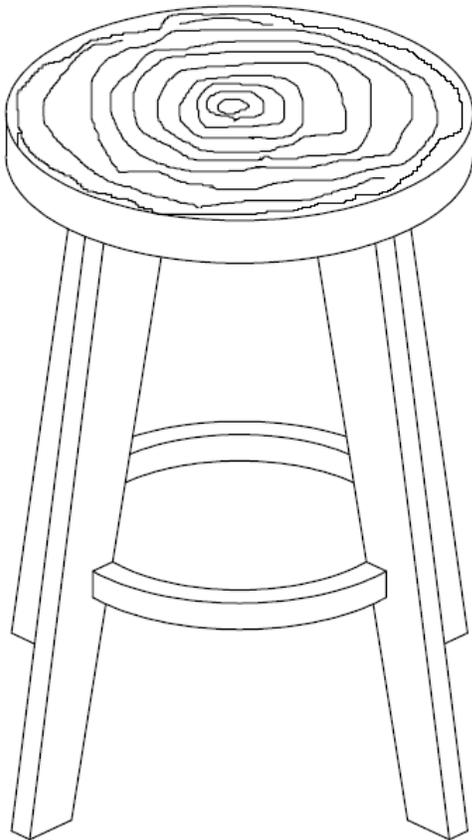


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

- 1** Fix All 4 Chair Leg (B) in to the Bottom Ring (C) and refer below drawing, please using the hardware JCBC Bolt (E) with Spring Washer (F) and Allen Key (G) to tighten it.

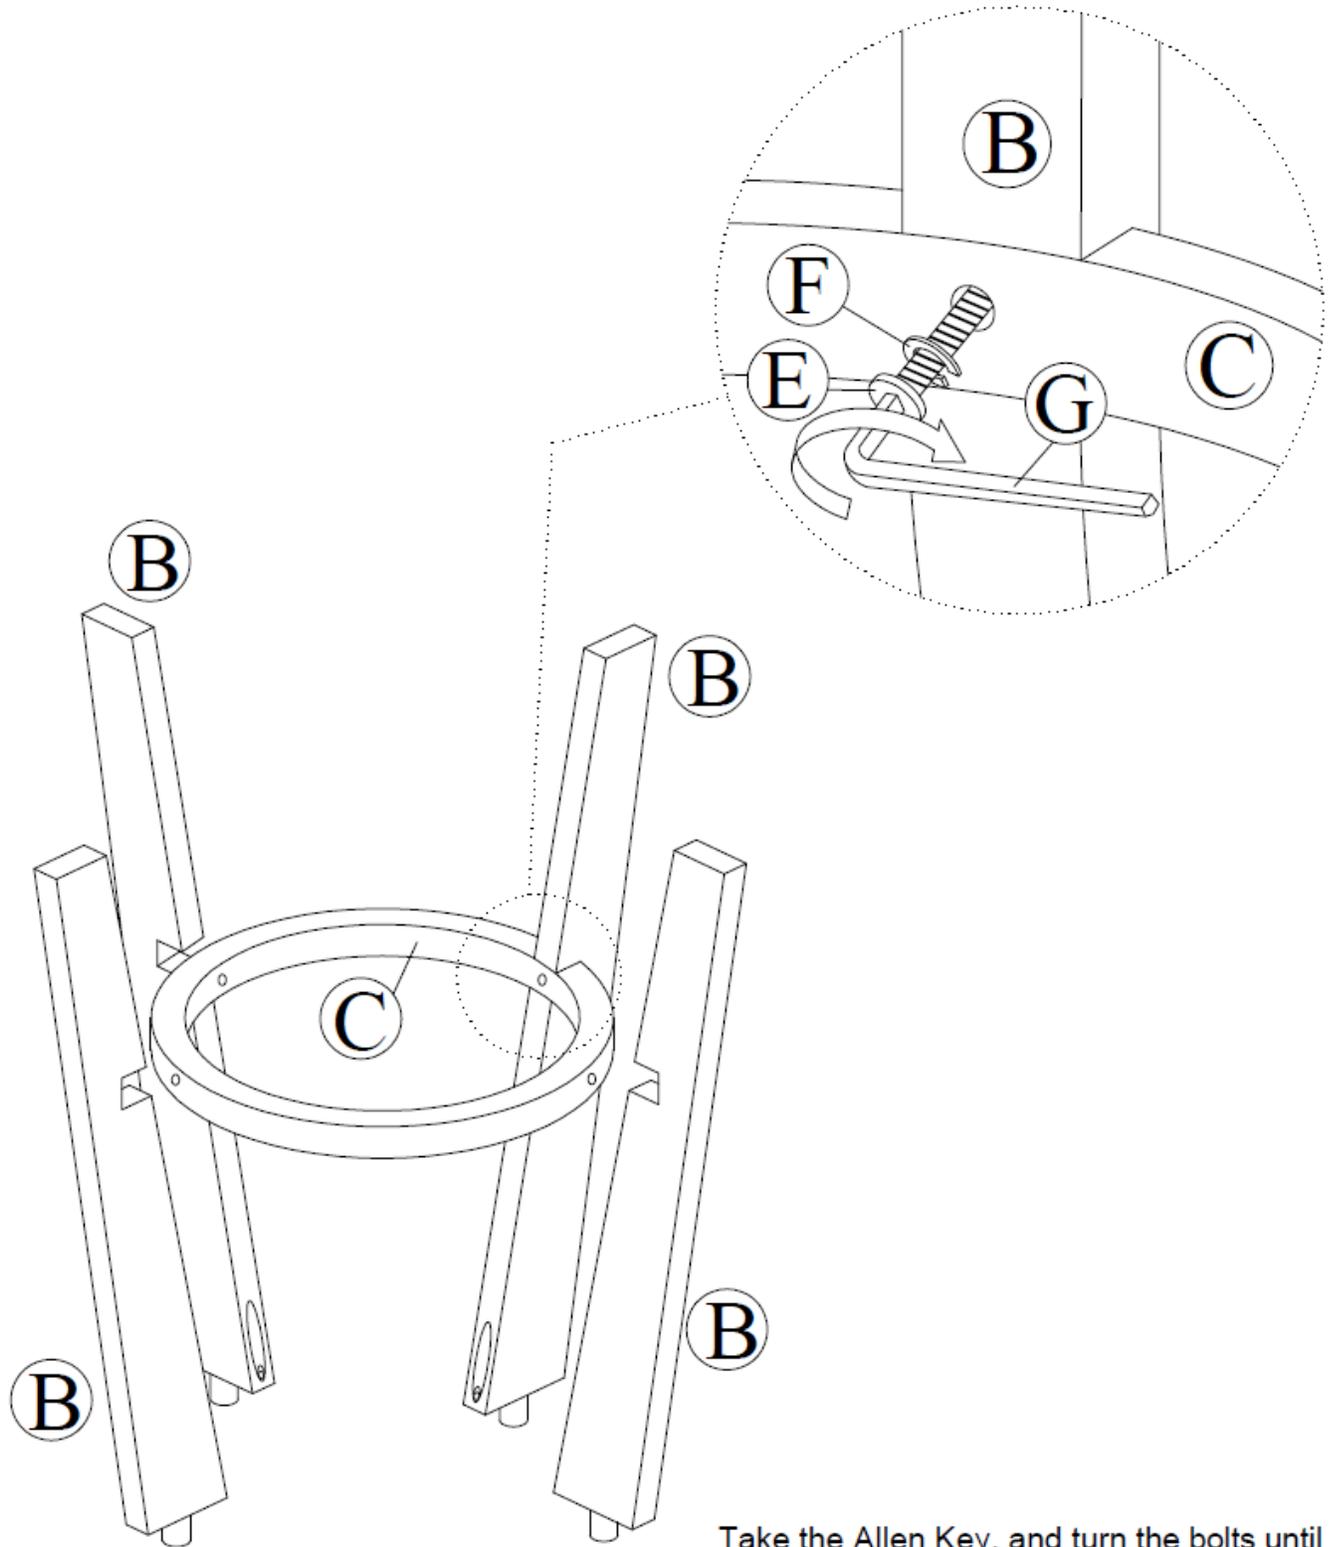

Take the Allen Key, and turn the bolts until the legs are secure. **DO NOT TIGHTEN COMPLETELY.** Stop when you feel you are adding force to tighten the bolt.

- 2** Put the Chair Seat (A) into the smooth surface, attached the whole legs complete set into the seat bottom hole, please refer below and using the JCBC Bolt (D) with Spring Washer (F) by Allen Key (G) to tighten.

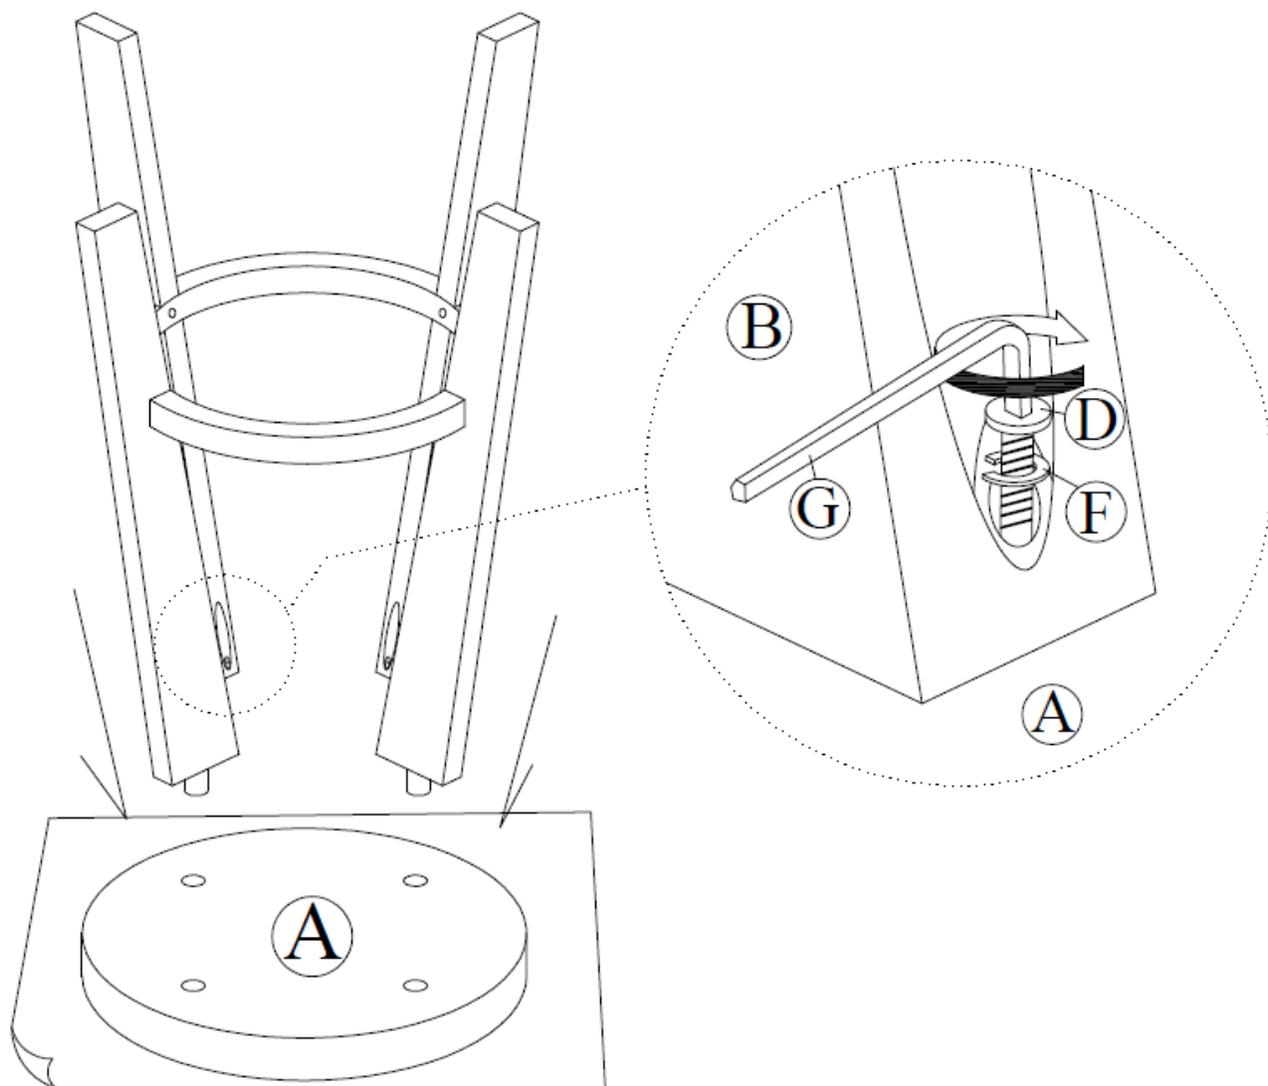

Stand stool up on an even surface and check that it is balanced.

If there is slight wobble, apply downward pressure in the corner where a leg is uneven. Keeping pressure in that corner, tighten all bolts.

If balanced, apply downward pressure evenly in the center and tighten all bolts.

Do not over-tighten beyond hole depth.

Helpful Tip:

-Instead of applying downward pressure while reaching under to tighten bolts, have someone sit in the stool while you tighten the bolts.

Cleaning & Care

Treat surface with care. Surface is resistant to scratches but is not scratch resistant. Clean surface with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.