



User Manual

Round Wall Sconce
Battery Version





WWW.OZARKE.COM

Thank you for shopping with Ozarké, we really appreciate your business. Our goal is to provide an excellent customer service before, during and after delivery. We've included a guide on how to install this light, should you require additional assistance please feel free to email us and one of our customer service reps will reach out to assist you.

You can reach us via email at info@ozarke.com or via phone at +1-(800) 604-7271

BEFORE YOU GET STARTED

When working with electrical wiring, follow these safety instructions to prevent injury or damage:


1. Turn off the power: Before starting any work, turn off the power to the area you will be working in.
2. Use appropriate tools: Only use tools designed for electrical work and in good condition.
3. Wear protective gear: Wear safety glasses, gloves, and other protective gear as necessary.
4. Test for power: Use a non-contact voltage tester to check for electrical current before touching any wires.
5. Avoid wet conditions: Do not work with electrical wiring in wet or damp conditions.
6. Keep a safe distance: Stay away from exposed wires or electrical components.
7. Seek professional help: Consult a qualified electrician if you are unsure about any aspect of electrical wiring or encounter any problems.



WARNING!

1. Do not use the power supply beyond the specified range (100-240V).
2. Avoid scratching the surface and wires of the light during installation.
3. Do not install the light outdoors.
4. The light should not be close to corrosive chemical objects or gases.
5. It should not be washed with water. It can only be wiped with a clean soft cloth.




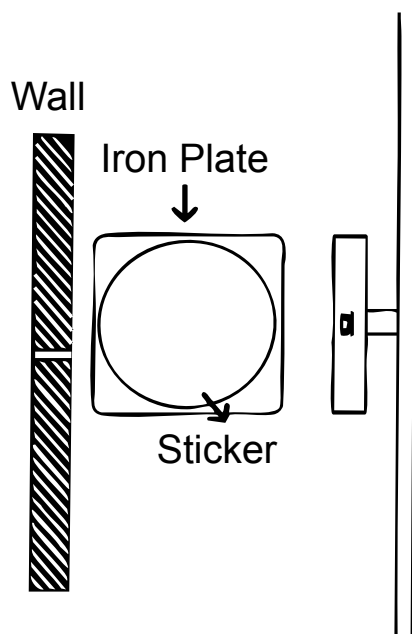

Method 1

1. Tear off the film on one side of the sticker and stick it on the iron plate
2. Tear off the other film and stick it on the appropriate wall position you want to choose.
3. Just make the suction cup on the back of the lamp adsorb to the iron plate and it can be used.

Note: After receiving the goods, please charge the lamp before using it for the first time, and the indicator light will turn off after it is fully charged. Please use: Output 5V—1A/or 5V—2A, Otherwise, the battery will not be charged or even damaged.

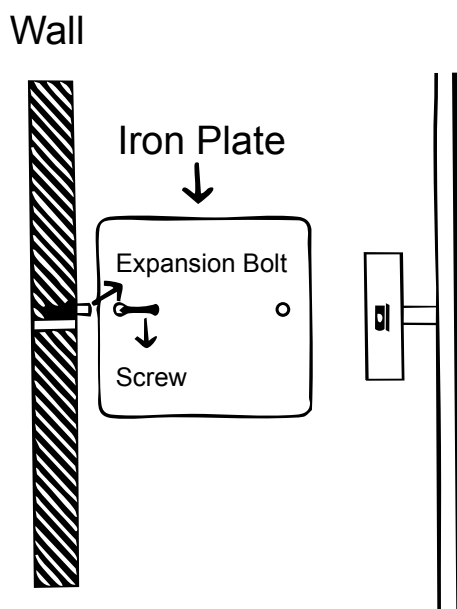

Method 2

1. Choose the appropriate position to drive the expansion bolt into the wall.
2. Align the screw holes corresponding to the iron plate with the expansion bolt.
3. Fix the iron plate with screws.
4. Just make the suction cup on the back of the lamp adsorb to the iron plate and it can be used.

Note: After receiving the goods, please charge the lamp before using it for the first time, and the indicator light will turn off after it is fully charged. Please use: Output 5V—1A/or 5V—2A, Otherwise, the battery will not be charged or even damaged.



Please note the remote control comes with the dimmable version only

1- Please Install two AAA batteries. Once you have installed the batteries, point the remote at the light fixture and press the "On" button the light will come on. The remote should connect automatically once the batteries are installed (If the remote does not connect see step 2)

2- To connect the remote to the lamp, it must be done within the first 5 seconds after you power the fixture on, press the "Connect" button until the fixture flashes.

3- Once the light is on, use the "+" and "-" buttons on the remote to adjust the brightness. Pressing "+" will increase the brightness, while "-" will decrease it.

4- Once the light is on, use the "k+" and "k-" buttons on the remote to adjust the color temperature. Pressing "k+" will increase the temperature while "k-" will decrease it. Increasing the temperature will make the emitting color warm and decreasing the temperature will make the emitting color cold.

Helpful information:

The bottom 5 buttons represent the following:

- 1- Adjust brightness
- 2- Dims the light
- 3- Warm white (4000K) option
- 4- Warm (3000K) option
- 5- Cold White (6000K) option

