Neo® Trim and Handicap Shower System (Valve not included)

FEATURES:

• CPT-1001: Shower Valve Trim

• S-2540: Shower Arm and Flange

• VS-3010: 2.5 GPM (9.5 L/min) Flow Rate Shower Head

w/60 in. Hose

• VS-156: Pause/Trickle Adaptor • VS-153-ADA: 24 in. ADA Slide Bar

VALVE OPTIONS:

• CPV-PB: Pressure Balance Valve

Sweat & Thread Connections

• CPV-PB-PXC: Pressure Balance Valve

PEX F1807 Crimp Inlet Connections

• CPV-PB-PXE: Pressure Balance Valve

PEX F1960 Cold-Expansion Inlet Connections

• CPV-T: Thermostatic Valve

Sweat & Thread Connections

• CPV-T-PXC: Thermostatic Valve

PEX F1807 Crimp Inlet Connections

• CPV-T-PXE: Thermostatic Valve

PEX F1960 Cold-Expansion Inlet Connections

STOCK FINISHES:



STANDARDS:

ASME A112.18.1/CSA B125.1 certified

ADA compliant

WARRANTY:

Visit www.speakman.com for full product warranty information


• See Speakman.com For Warranty Information





Information continues on next page

Neo® Trim and Handicap Shower System (Valve not included)

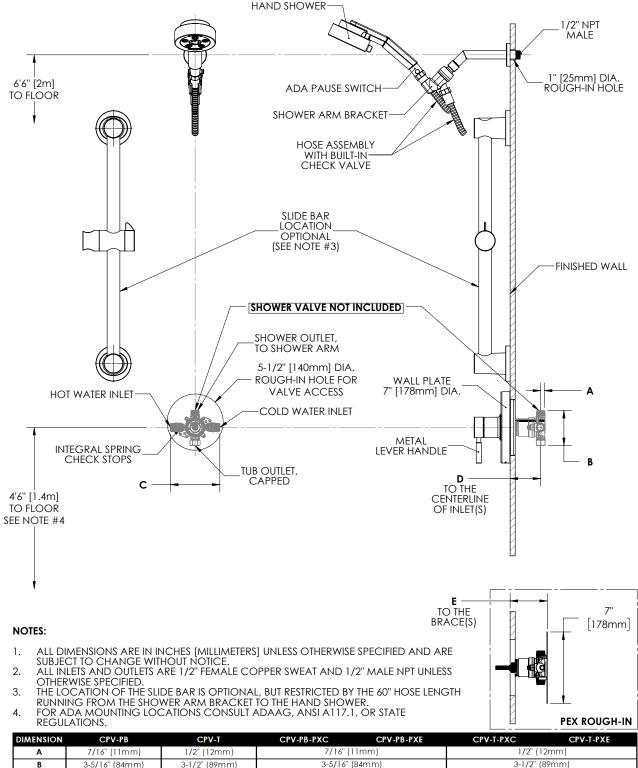

DIMENSION	CPV-PB	CPV-T	CPV-PB-PXC	CPV-PB-PXE	CPV-T-PXC	CPV-T-PXE
Α	7/16" (11mm)	1/2" (12mm)	7/16" (11mm)		1/2" (12mm)	
В	3-5/16" (84mm)	3-1/2" (89mm)	3-5/16" (84mm)		3-1/2" (89mm)	
С	4-13/16" (123mm)	5-7/8" (150mm)	4-13/16" (123mm)		5-7/8" (150mm)	
D	2-1/2" (63mm) MIN TO 3-1/2" (89mm) MAX					
E			3-1/8" (79mm) MIN TO	4-1/8" (105mm) MAX	3-3/16" (81mm) MIN TO	4-3/16" (106mm) MAX

Architect/Engineer Approval Space:

P: 800-537-2107

F: 800-977-2747

W: WWW.SPEAKMAN.COM R:01-JANUARY 2019