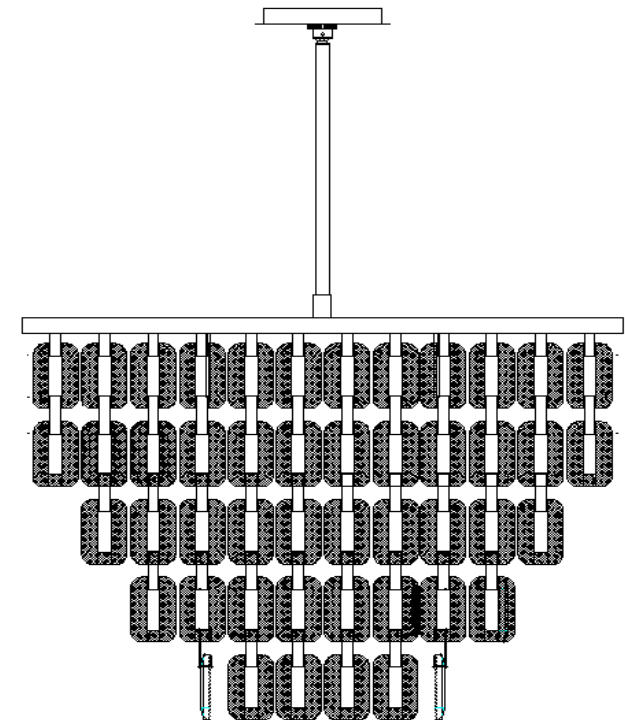


QUEENIE TIERED GLASS CHANDELIER

DESIGN # CTL1122A

Assembly Instructions



Need help?

Feel free to contact us via email or call
if you have any specific questions!

contact us:

cs@safavieh.com








866-422-9070

SAFAVIEH
C O U T U R E

Thanks for bringing Safavieh Couture into your home


Every thing we make is incredibly simple to set up, including your new chandelier. Tools Required for Assembly (not included): Screwdriver, Junction box

Parts List

Ax3		Jx1	
Hex nut		Loop Ring	
Bx1		Kx2	
Metal washer		6"rod	
Cx1		Lx2	
Threaded rod		12"rod	
Dx1		Mx1	
Teeth washer		Fixture body	
Ex1		Nx16	
Cluster		Bulb	
Fx1		Ox105	
Mounting bracket		Bead strand	
Gx1		Px1	
Steel cable buckle		Metal ring	
Hx1		Qx2	
Canopy		Outlet box screw	
Ix1		Rx1	
Swivel joint		Steel cable buckle	
		Sx3	
		Wire Nut	


1

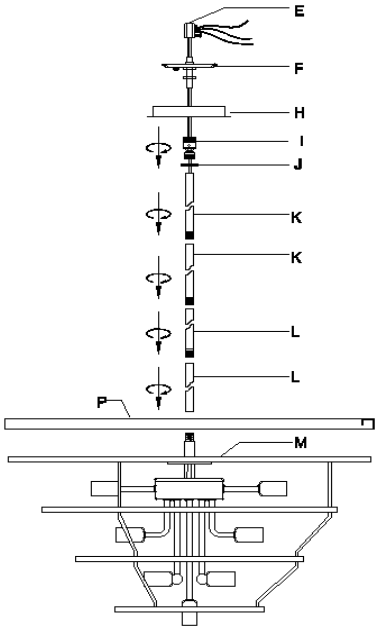Pass wire and cable through 6"rod (K), 12"rod (L), Loop Ring(J), Swivel joint (I), Canopy(H), Mounting bracket(F) and out from side hole of Cluster (E). Then fasten 6"rod (K), 12"rod (L), Swivel joint (I).



2

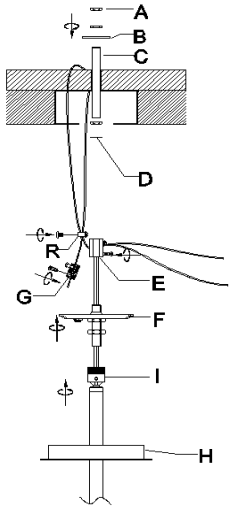Raise the threaded rod (C) thread to the cluster (E), then attach to the ceiling, secure with metal washer (B) and hex nut (A). Wrap the steel wire rope around the beam and lock it with the steel cable buckle(R) and (G). Tighten Mounting bracket(F) to Cluster (E), then fix Swivel joint (I) to Mounting bracket(F).



**Thanks for bringing
Safavieh Couture into
your home**

Every thing we make is incredibly simple to set up, including your new chandelier. Tools Required for Assembly (not included): Screwdriver, Junction box

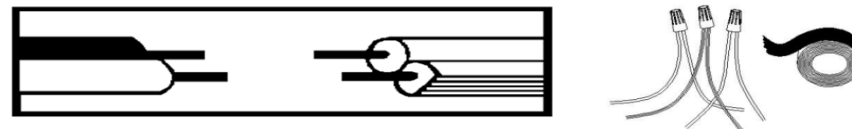
3 Wire connection

Connect fixture neutral wire (ribbed) to the outlet box neutral wire (usually white) using a wire nut. Connect fixture hot wire (smooth and with markings) to the outlet box hot wire (usually black) using a wire nut.

CAUTION: Do not reverse the hot and neutral connections! Make sure they are inserted properly.


Grounding Instructions:

Wrap the ground wire from the outlet box around the green ground screw on the mounting bracket no less than 2" from the end of the wire. Tighten the ground screw. If the fixture is supplied with a ground wire, connect it to the outlet ground wire with a wire nut.



4

Install the mounting bracket (F) to the junction box with outlet box screw (Q). Connect ground wire with a wire nut. Attach the canopy (H) to the ceiling with Loop ring (J).



5

Hang up the bead strand(O) to the fixture body(M), place the metal ring(P) to the fixture body(M), then install the bulb(N) to each socket.

Distribute into three equal parts, each part contains 12 pieces.

