


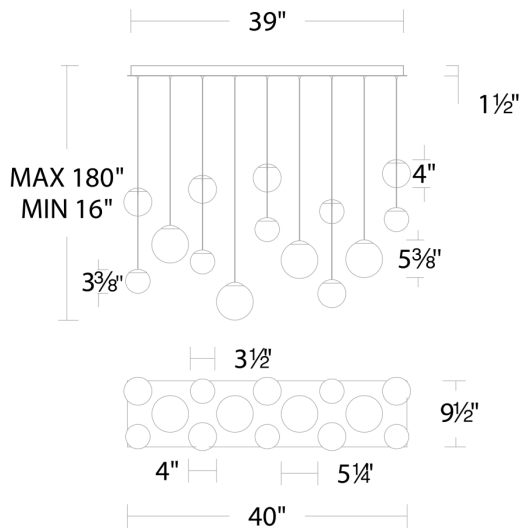

PD-34414L

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Pisces

PD-34414L

PRODUCT DESCRIPTION

Embracing the art of light, a multitude of natural Spanish Alabaster orbs shimmer at different heights from a multi-point canopy, casting an entrancing celestial glow.

FEATURES

- Driver concealed within the canopy
- First class quality Spanish alabaster
- Natural alabaster with unique veining in each crafted piece
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field


SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL, Damp Location Listed
Input	120-277V, 50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Spun aluminum frame with alabaster shade

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-34414L 40" - 14 Lights	2700K/3000K/ 90	108W 108W	5019 5019	AB Aged Brass BK Black
	2700K/3000K/ 90			

Example: **PD-34414L-BK**

For custom requests please contact customs@modernforms.com

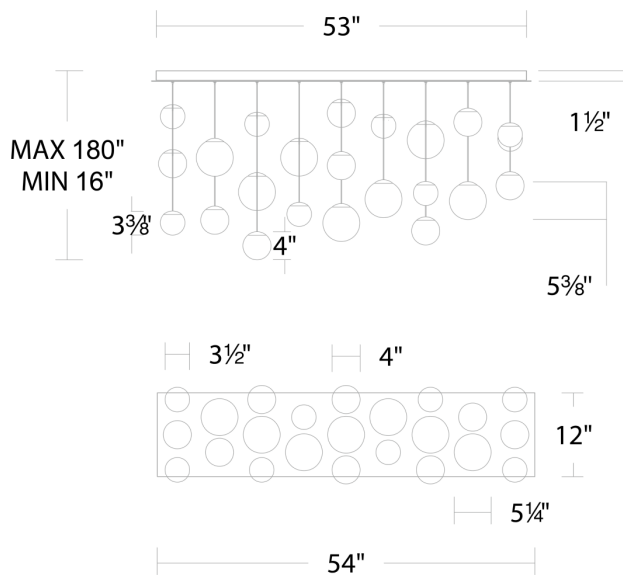

PD-34423L

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Pisces

PD-34423L

PRODUCT DESCRIPTION

Embracing the art of light, a multitude of natural Spanish Alabaster orbs shimmer at different heights from a multi-point canopy, casting an entrancing celestial glow.

FEATURES

- Driver concealed within the canopy
- First class quality Spanish alabaster
- Natural alabaster with unique veining in each crafted piece
- Thin powered aircraft cables provide an ultra clean look for adjustable suspension height
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Option to pre-select color temperature or adjust in the field
- NEC CODE (314.24) requires that ceiling outlet boxes in the U.S. support up to 50 lbs.
- This fixture in the 23 light format exceeds 50 lbs. and must be installed using a U.L. listed outlet box approved for up to 100 lbs. or supported independently of the outlet box

SPECIFICATIONS

Rated Life	50000 Hours
Standards	ETL, cETL,Damp Location Listed
Input	120-277V,50/60Hz
Dimming	ELV, 0-10V, TRIAC
Color Temp	2700K/3000K/3500K/4000K
CRI	90
Construction	Spun aluminum frame with alabaster shade

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-34423L 54" - 23 Lights	2700K/3000K/ 90	179W 179W	8506 8506	AB Aged Brass BK Black
	2700K/3000K/ 90			

Example: **PD-34423L-BK**

For custom requests please contact customs@modernforms.com