


Examine all packaging material for small parts that may have come loose during shipment. Periodic checks are recommended to insure that all components are in proper position, tight and free from damage. Keep this assembly instruction for future reference. Adult assembly is required.

HARDWARE LIST

- A (14) 1/4" x 15mm Allen Bolts
- B (14) Φ6.5 Spring Washers
- C (12) Φ13 x δ1.5 Flat Washers
- D (2) Φ19 x δ1.5 Flat Washers
- E (4) Wood Screws
- F (1) Allen Wrench

PARTS LIST

- G (1) Chair Back
- H (1) Seat Base
- I (1) Left Support Brace
- J (2) Front Legs
- K (1) Seat Cushion
- L (1) Right Support Brace

PART	QTY	HARDWARE	PART	QTY	HARDWARE
A	14		B	14	
C	12		D	2	
E	4		F	1	

STEP 1 - Figure 1

Begin assembly by attaching each Front Leg (J) to bottom of Seat Base (H) using 2 Allen Bolts (A), 2 Spring Washers (B) & 2 Flat Washers (C) per leg from bottom and 1 Allen Bolt (A), 1 Spring Washer (B) & 1 Flat Washer (C) per leg from top. Do not fully tighten bolts.

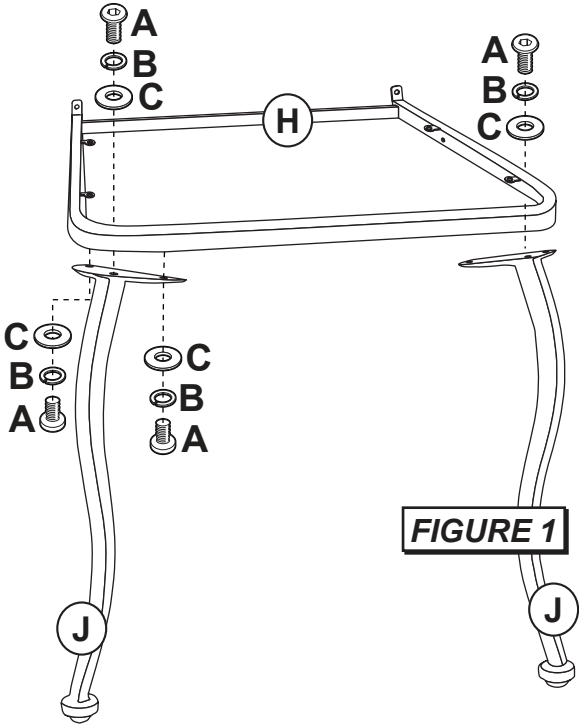


FIGURE 1


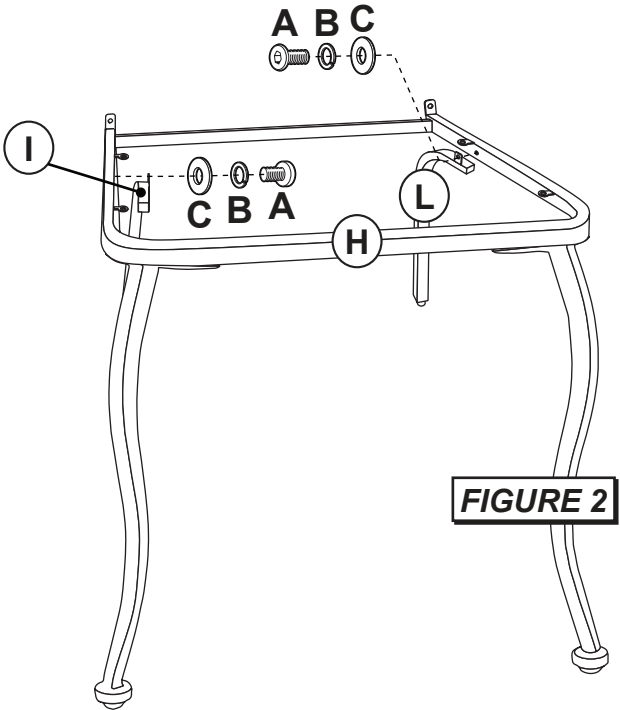


FIGURE 2


STEP 2 - Figure 2

Next attach Left and Right Support Braces (I & L) to Seat Base (H) using using 1 Allen Bolt (A), 1 Spring Washer (B) & 1 Flat Washer (C) per side. Do not fully tighten bolts.

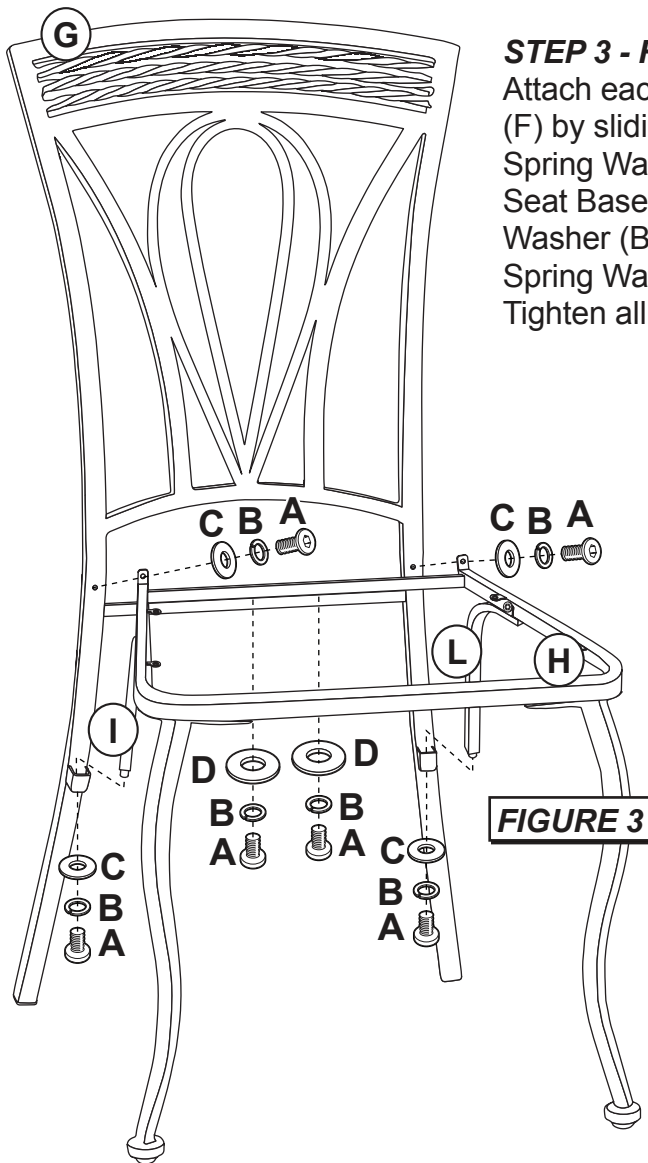

STEP 3 - Figure 3

Attach each Left & Right Support Brace (H & K) to Chair Back (F) by sliding in place and securing with 1 Allen Bolt (A), 1 Spring Washer (B) & 1 Flat Washer (C) per bottom side. Secure Seat Base (G) to Chair Back (F) using 1 Allen Bolt (A), 1 Spring Washer (B) & 1 Flat Washer (C) per side and 2 Allen Bolts (A), 2 Spring Washers (B) and 2 Flat Washers (D) from the center. Tighten all bolts from previous steps.

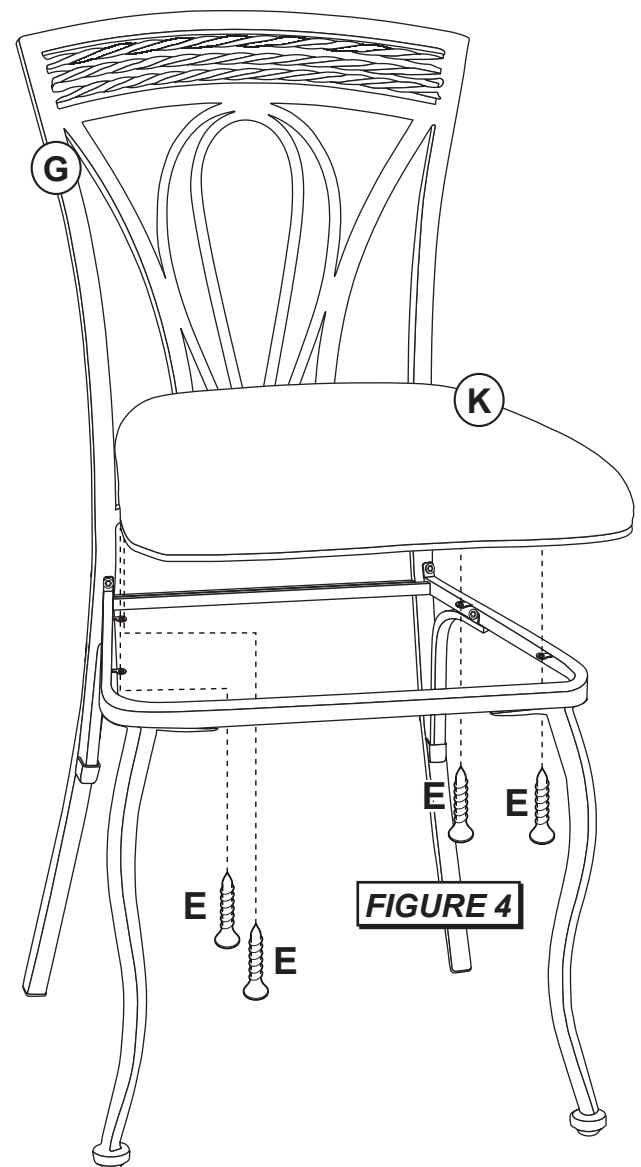

STEP 4 - Figure 4

Finally attach Seat Cushion (K) to the top of Seat Base (H) using 4 Wood Screws (E) to secure in place. Tighten all screws using phillips head screwdriver. The assembly is now complete.