

Installation Instruction

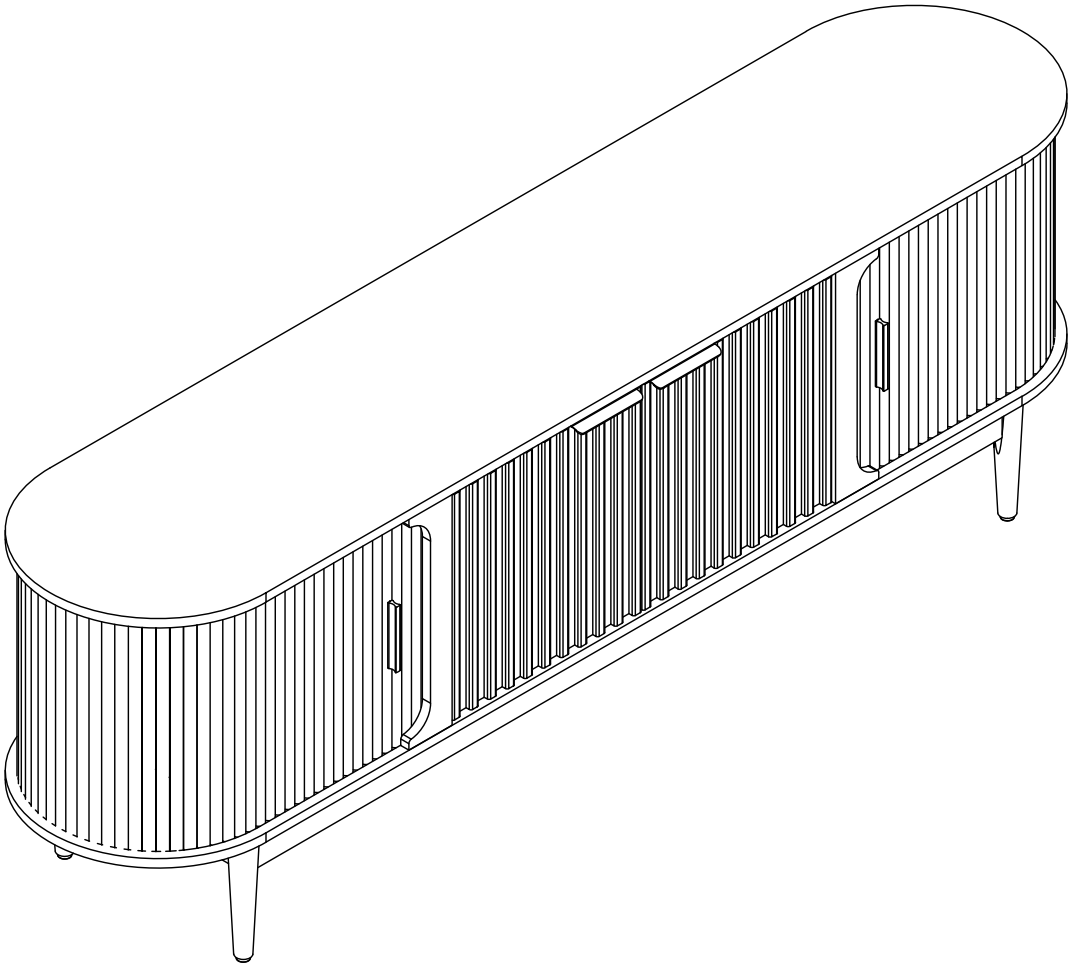

Assembling

What you need


- Use the packaging carton as a working surface to prevent product damage during assembly
- Phillips head screwdriver



Weight Limitation



100 lbs table top | 35 lbs per

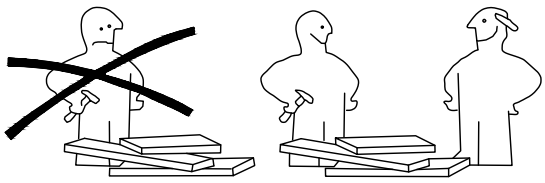


What' included

Code	Description	Qty
A	Cam Bolt M6X35MM	24
B	Cam Lock15X10MM	24
C	Wooden Dowel M8X30MM	28
D	Screw M4X40MM	10
E	The screw M3.5X12MM	64
F	The screw M3X14MM	2
G	Hinge	4
H	Ron absorption	1
I	Shelf Holder	4
J	Cam Bolt M4X14MM	4
K	Screw M6X40MM	8
L	Reinforced iron sheet	4

Assembling

What you need


- Use the packaging carton as a working surface to prevent product damage during assembly
- Phillips head screwdriver



Weight Limitation




100 lbs table top | 35 lbs per

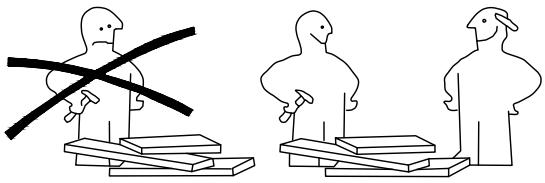

What' included

Code	Description	Qty
M	Washer	8
N	Washer	8
O	Screw M3.5X14MM	6
P	Metal handle	2
Q	Metal handle	2
R	Four hole iron sheet	1
S	Anchor	2
T	Nylon Strap	2
U	Adjustable Foot	5
V	The back button	12
W	Wrench M4X55MM	1
X	Circular hole Decals	12

The Hardwares

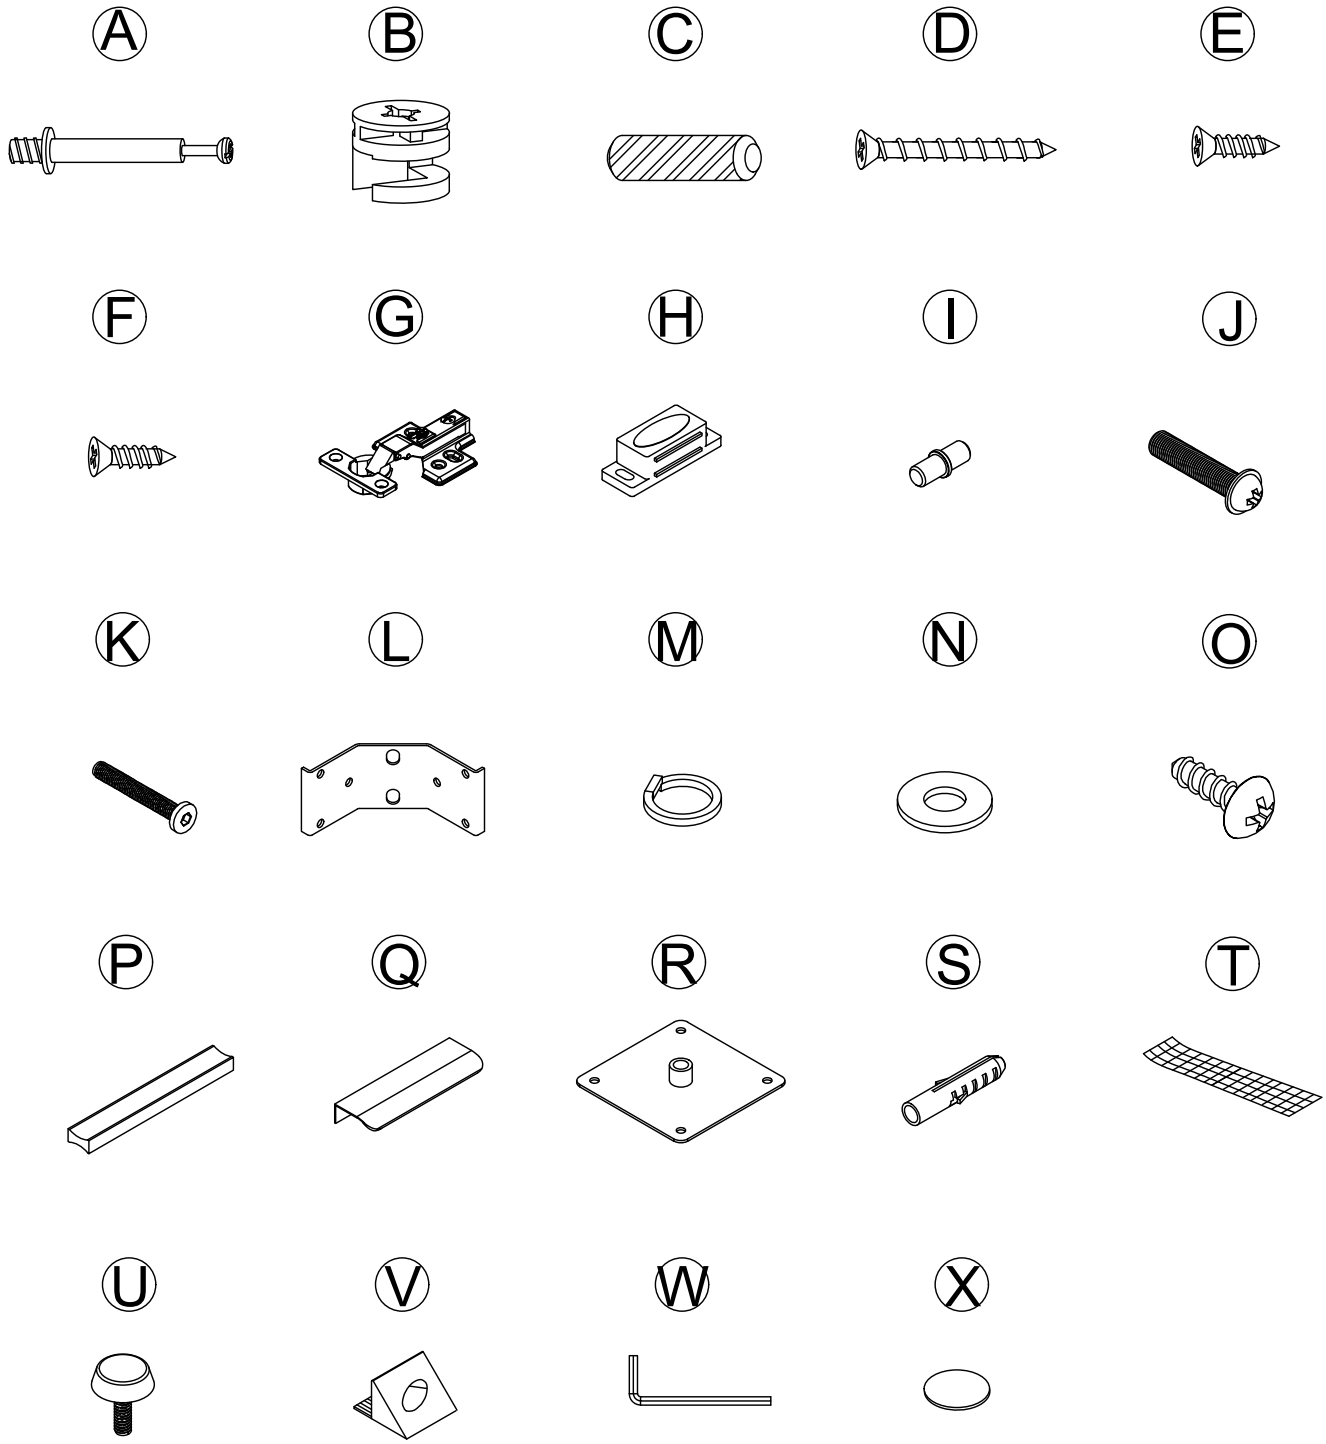


IMPORTANT:
1.Do not tighten bolts / screws completely until all bolts / screws are lined up and inserted into holes.
2.Do not over tighten screws and bolts to avoid stripping
3.Please use hand tools to assemble this product, you can also use power tools (please use power tools carefully)

Included Accessories


Code	Description	Qty
1	Cabinet Top	1
2	Bottom Panel	1
3	Left lower panel	1
4	Right lower panel	1
5	Left Middle Side Panel	1
6	Right Middle Side Panel	1
7	Movable laminated plate	1
8	Decorative strip	2
9	Backboard	2
10	Backboard	1
11	Door plank	2
12	Supporting foot	4
13	Foot adjustment	1
14	Changli Water	2
15	Short water drainage	2
16	Weather screenl	2

The Accessoriess

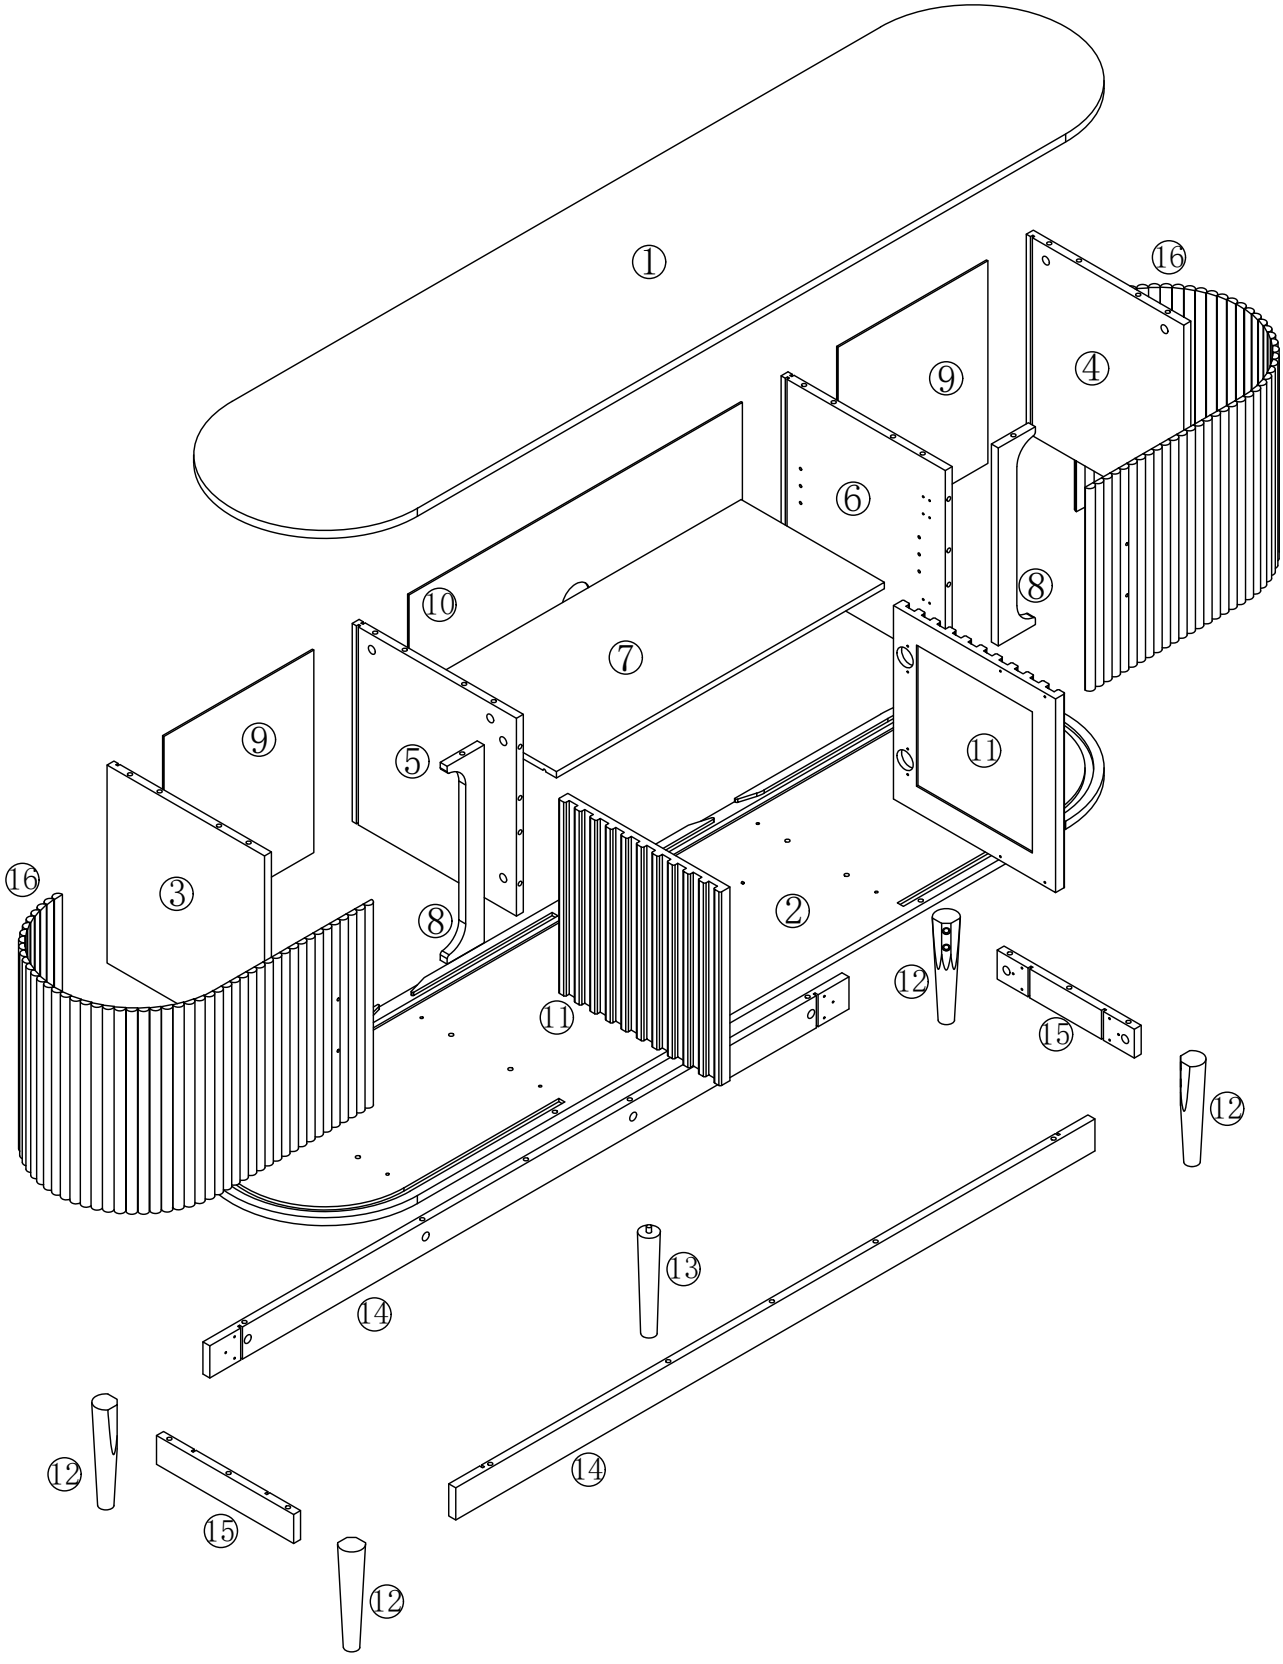

Step 1


A	×24





F	×2



H	×1



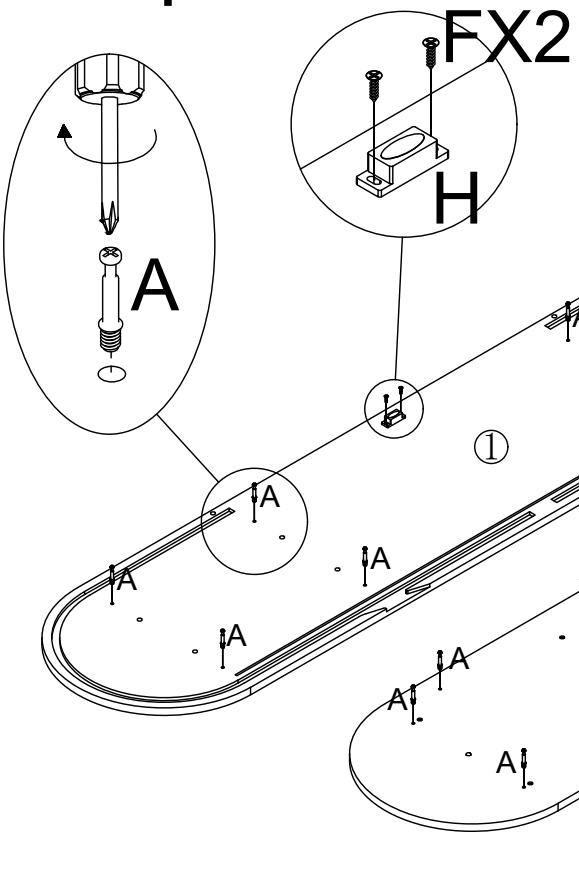

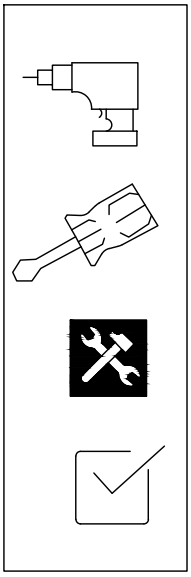


Step 2

B	×4




C	×4





X	×4




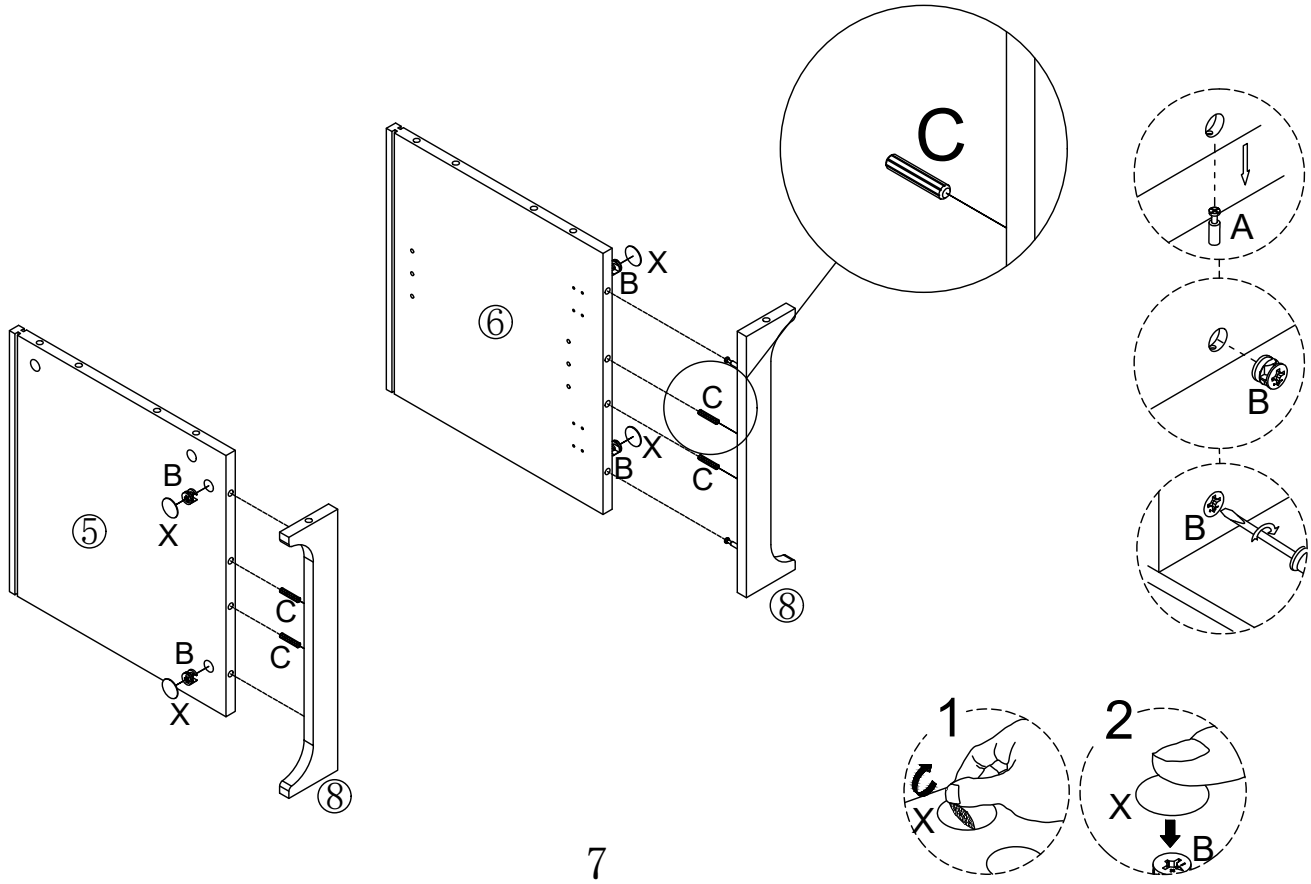


Step 3


B	×8	C	×10	X	×8
					

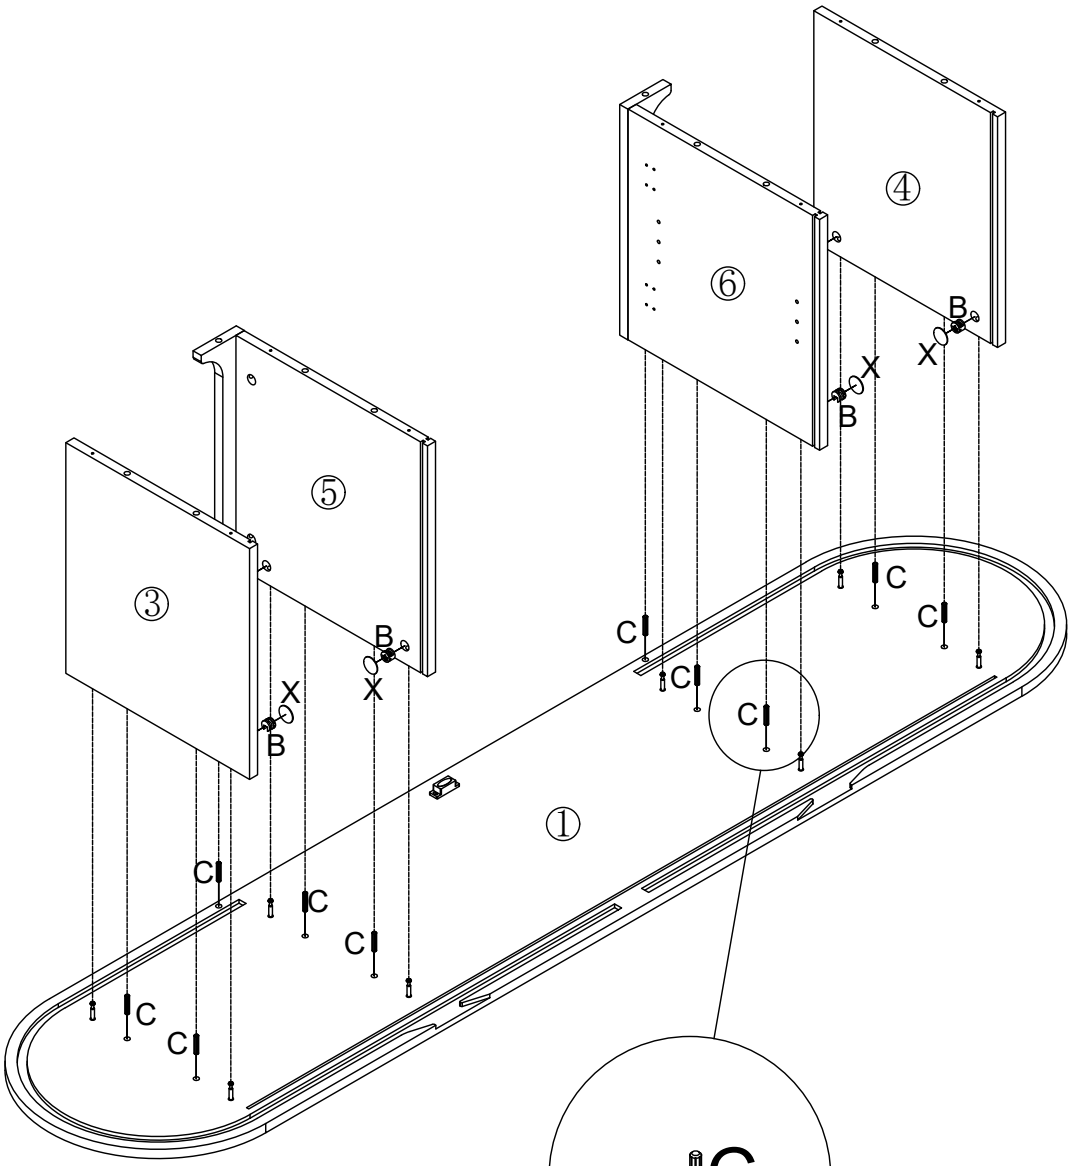

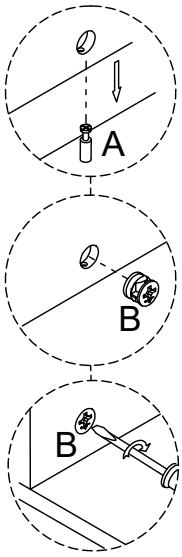

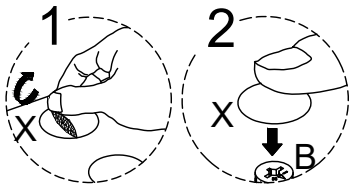


Step 4

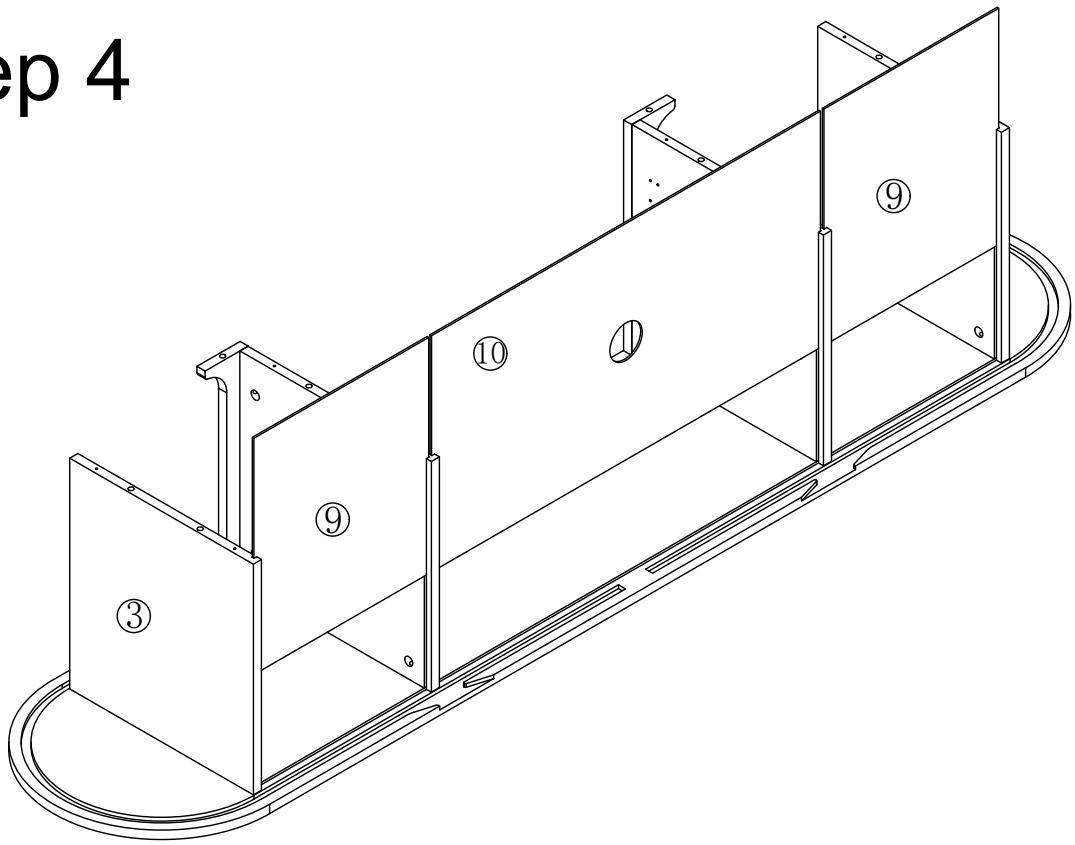



Step 5


C	×10	D	×8

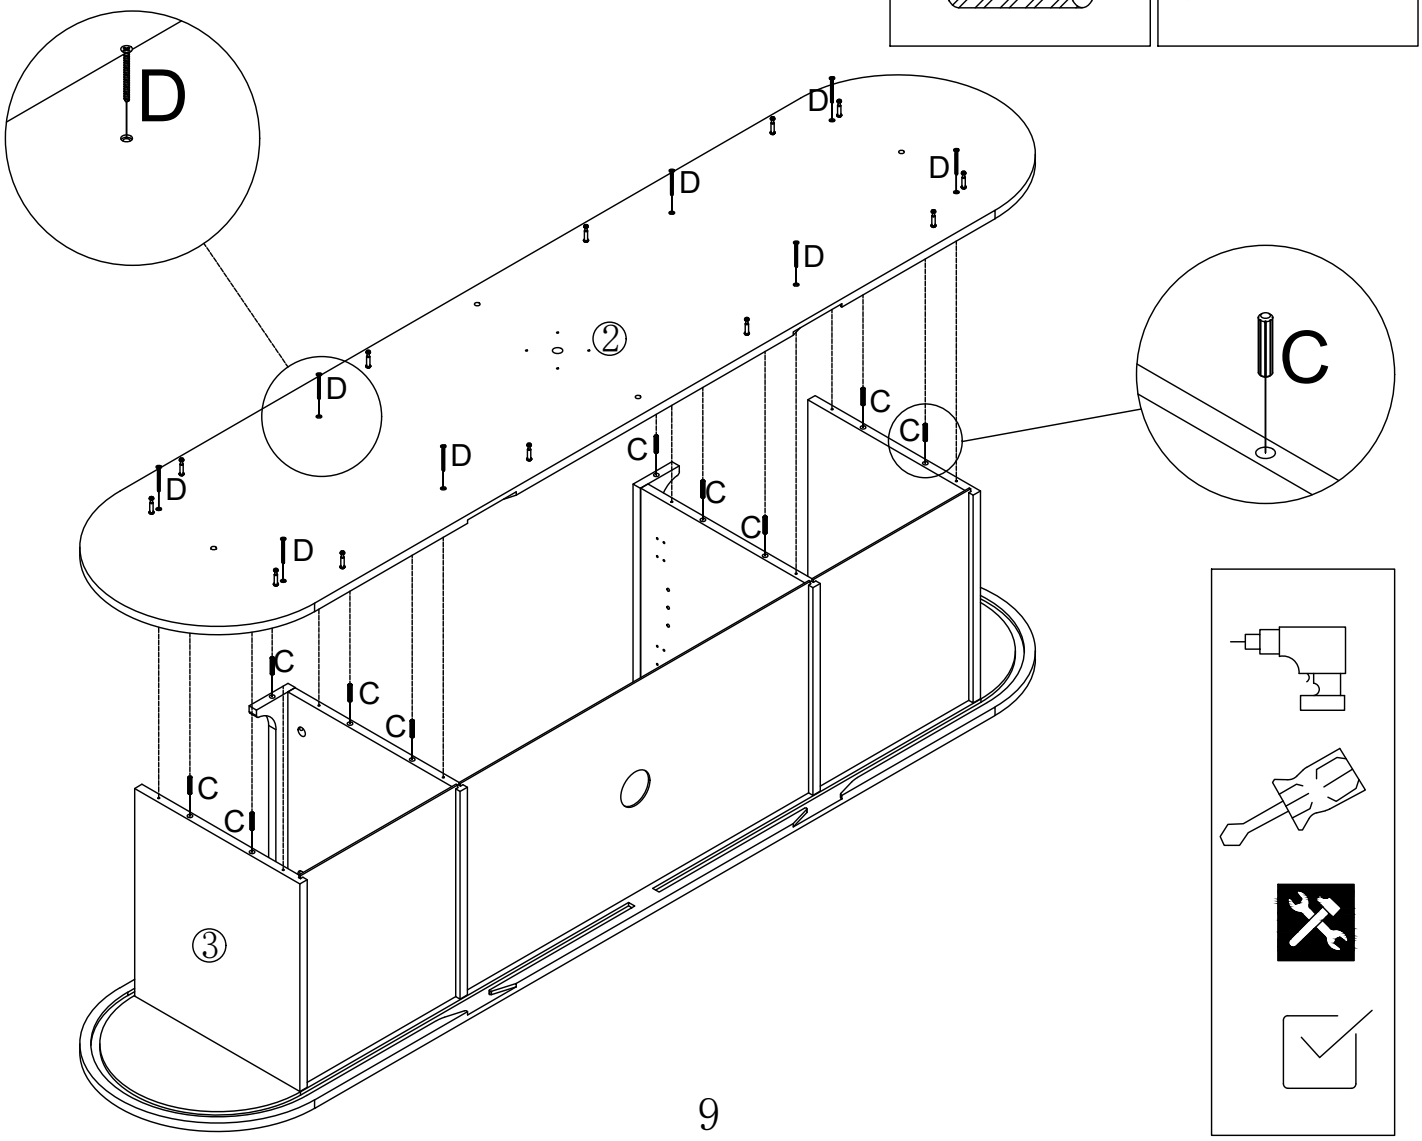


Step 6

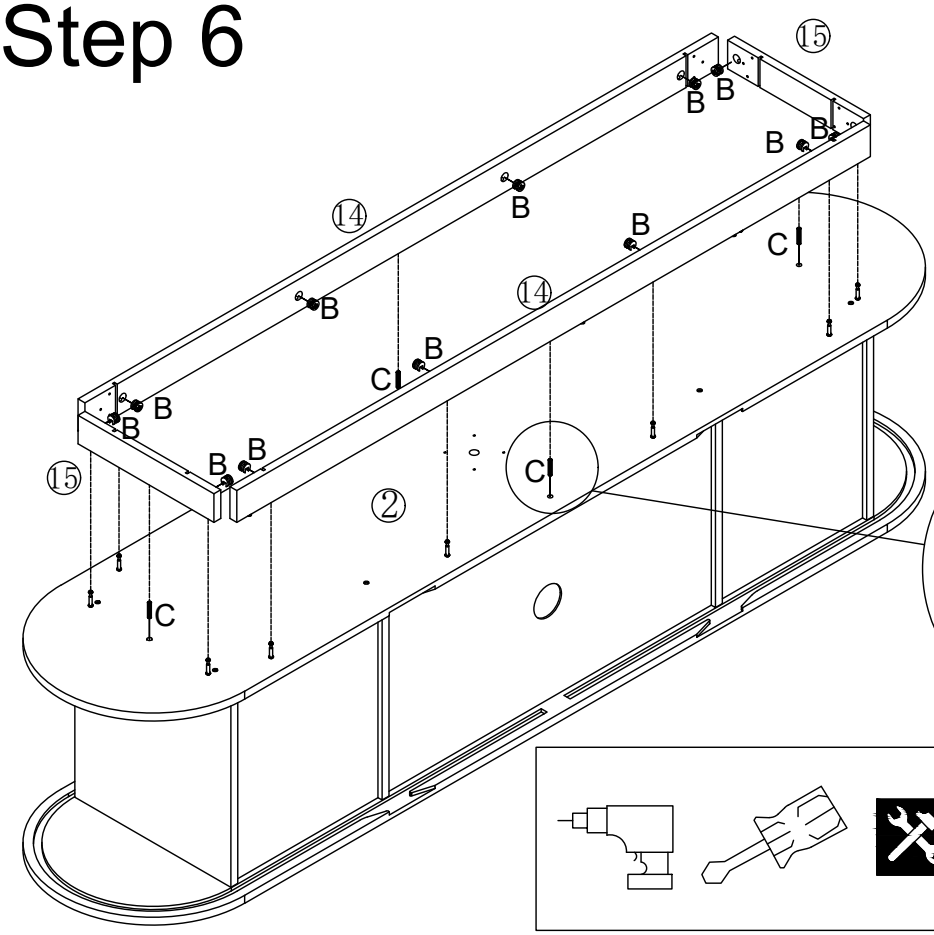
⑮
B
B
B
B
⑭
B
B
C
⑭
B
B
C
B
B
B
B
⑮
②
C
C



C



B
×12


C
×4

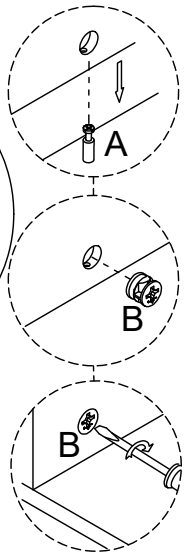

A
B
B


Step 7

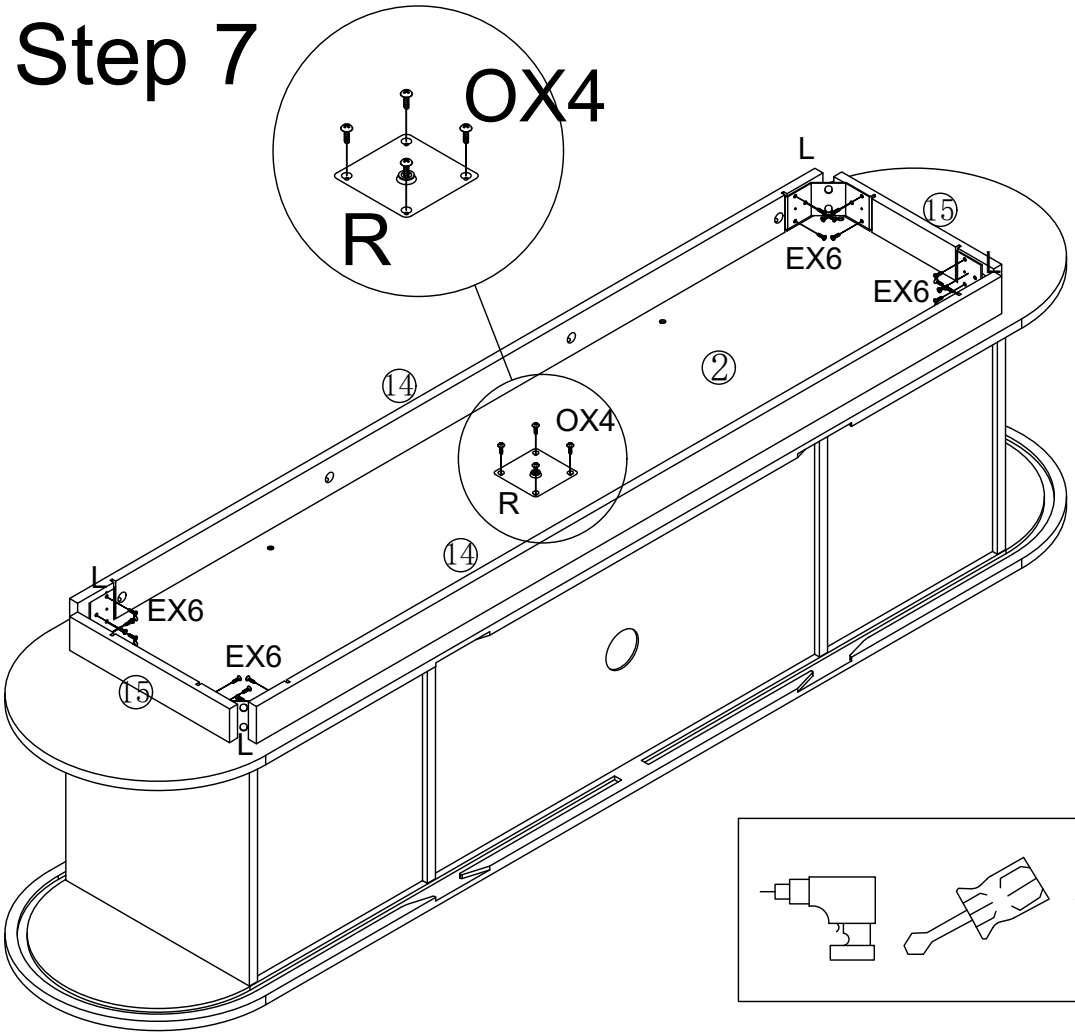
OX4
R
L
⑮
EX6
EX6
L
⑭
②
OX4
R
⑭
L
EX6
EX6
⑮
L


E
×24


L
×4



O
×4


R
×1


Step 8


K	×8
	

M	×8
	


N	×8
	

U	×5
	

W	×1
	



Step 9

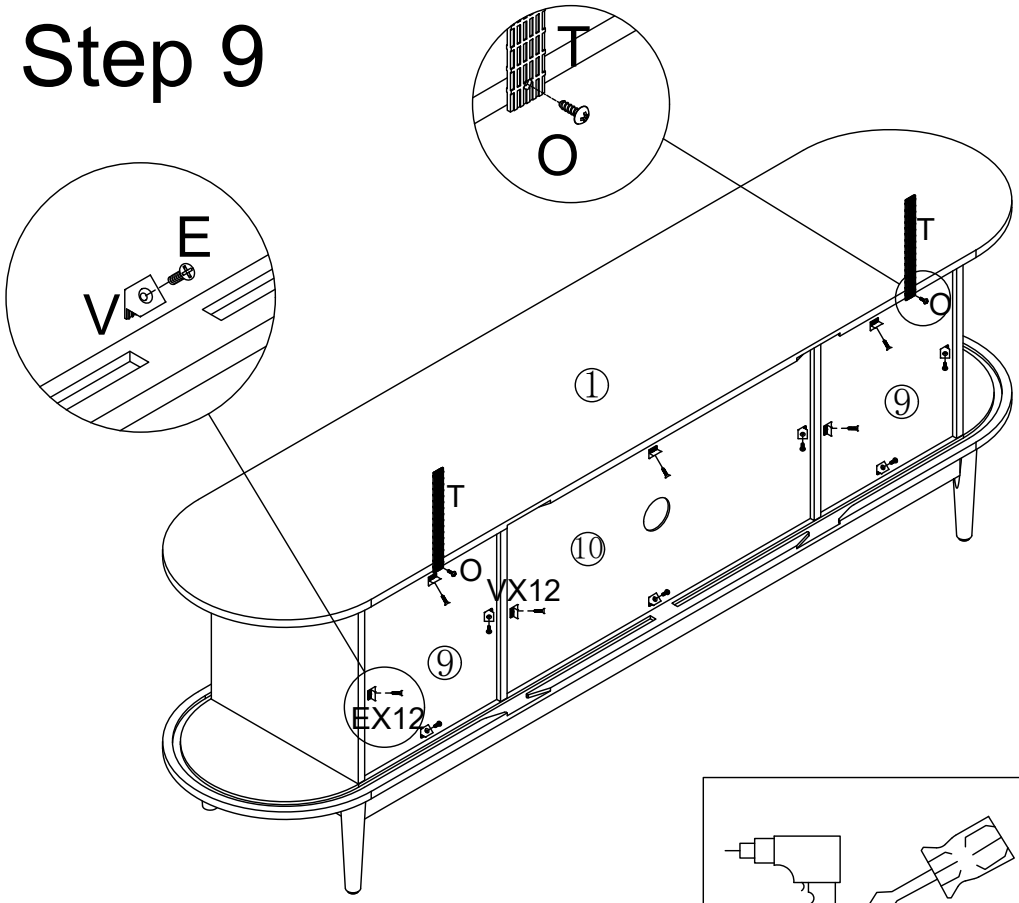


E	×12

O	×2

T	×2


V	×12

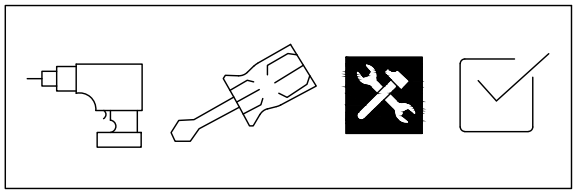

Step 10


J	×4

P	×2

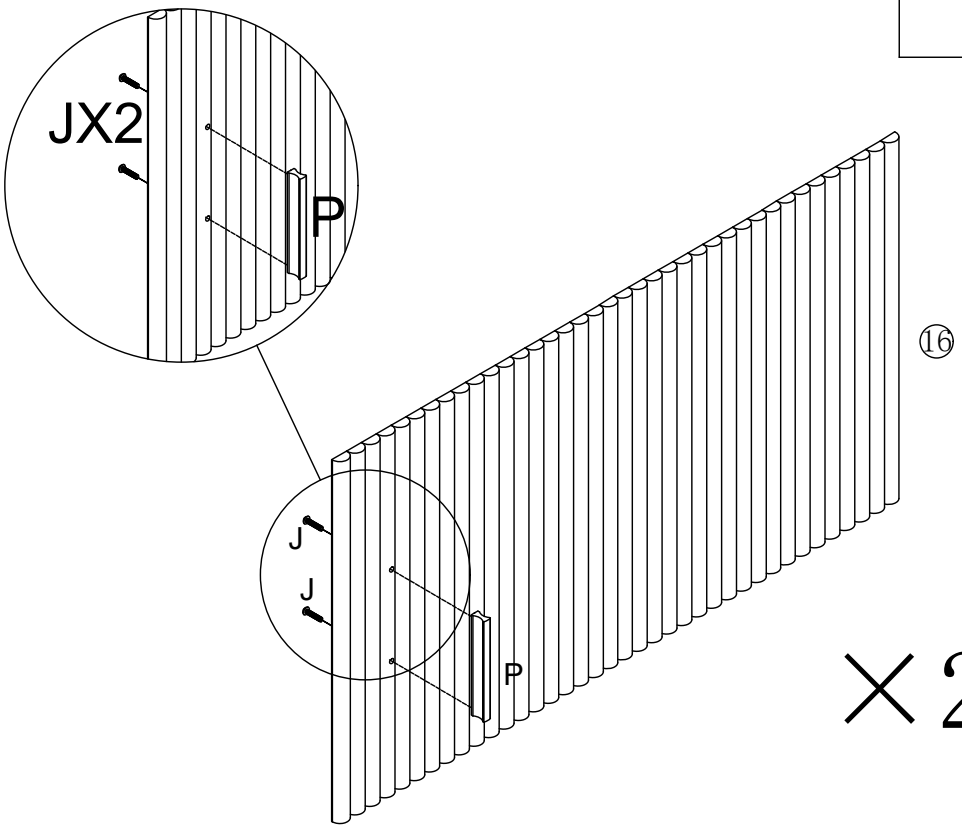


×2



Step 11

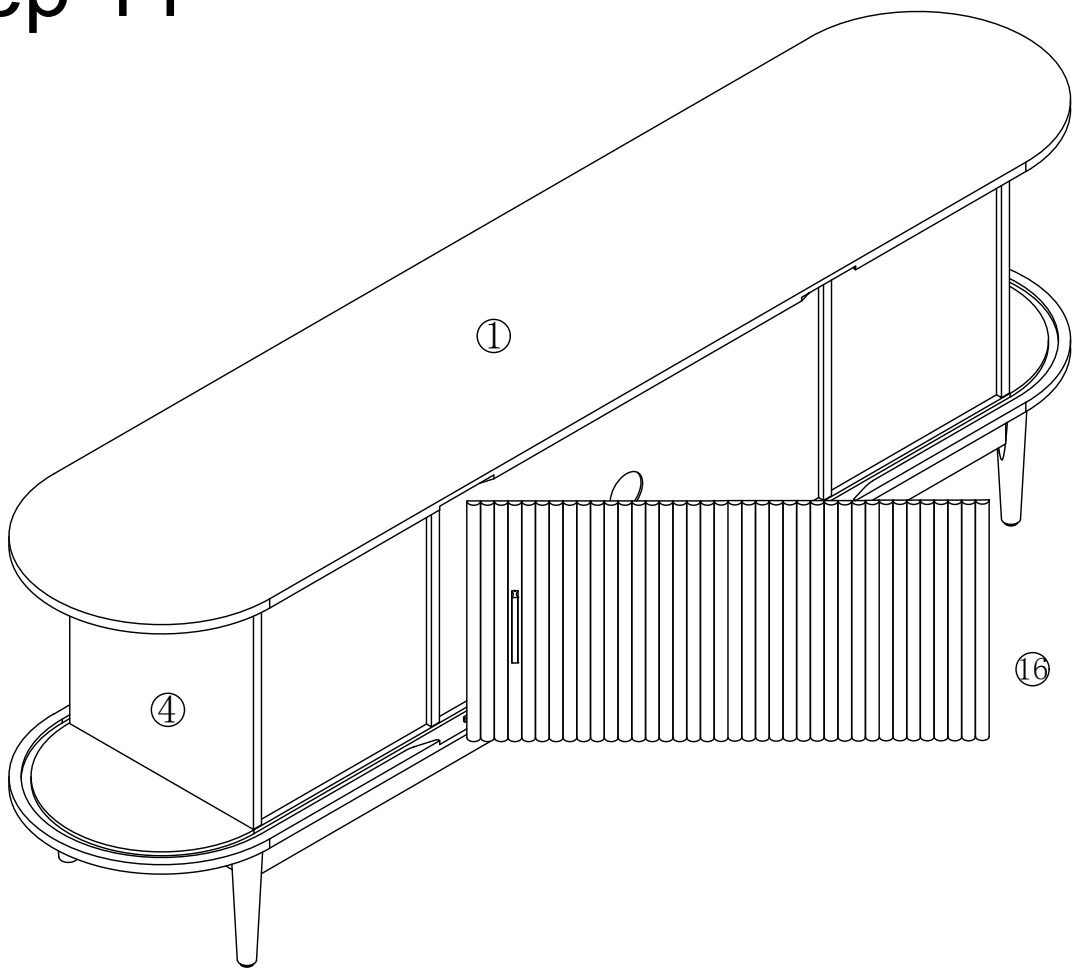

Step 12

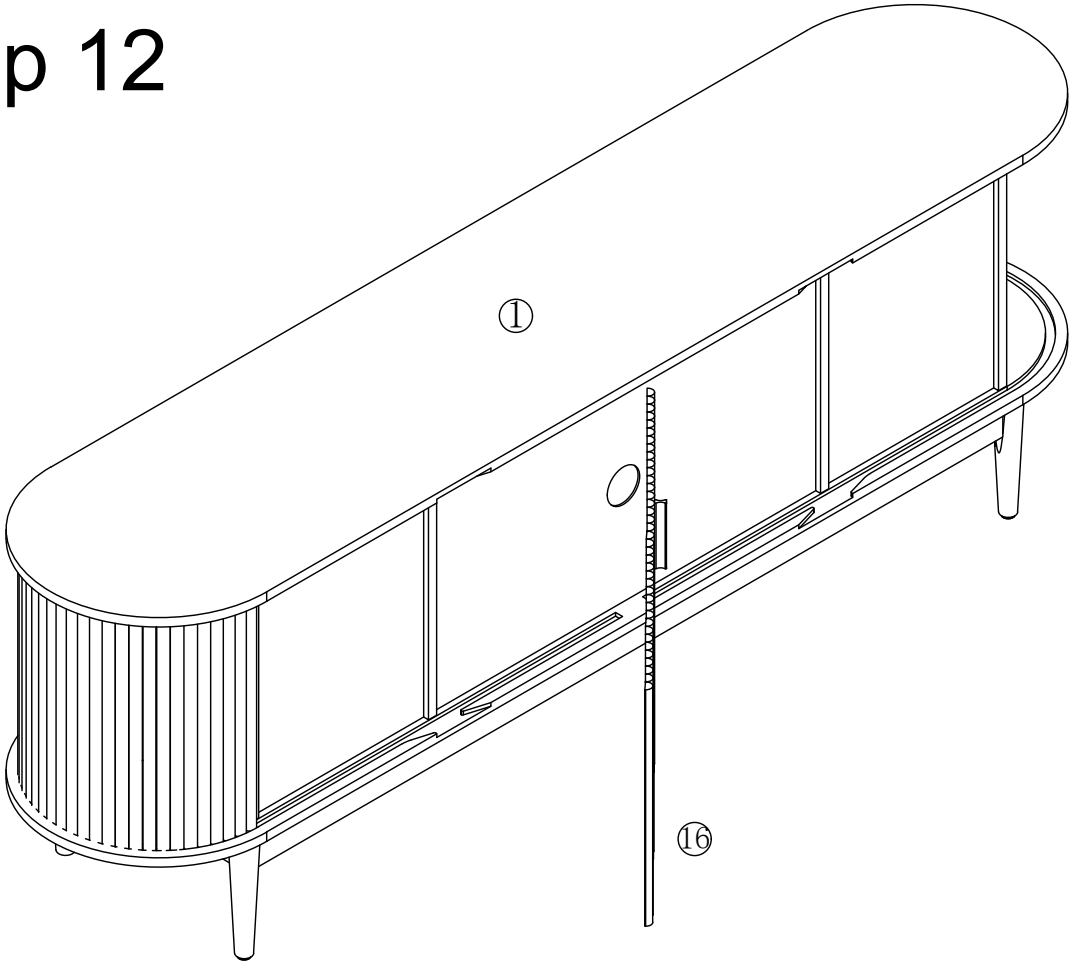


Step 13


E	×12	G	×4	Q	×2
					

Step 14

I	×4
	

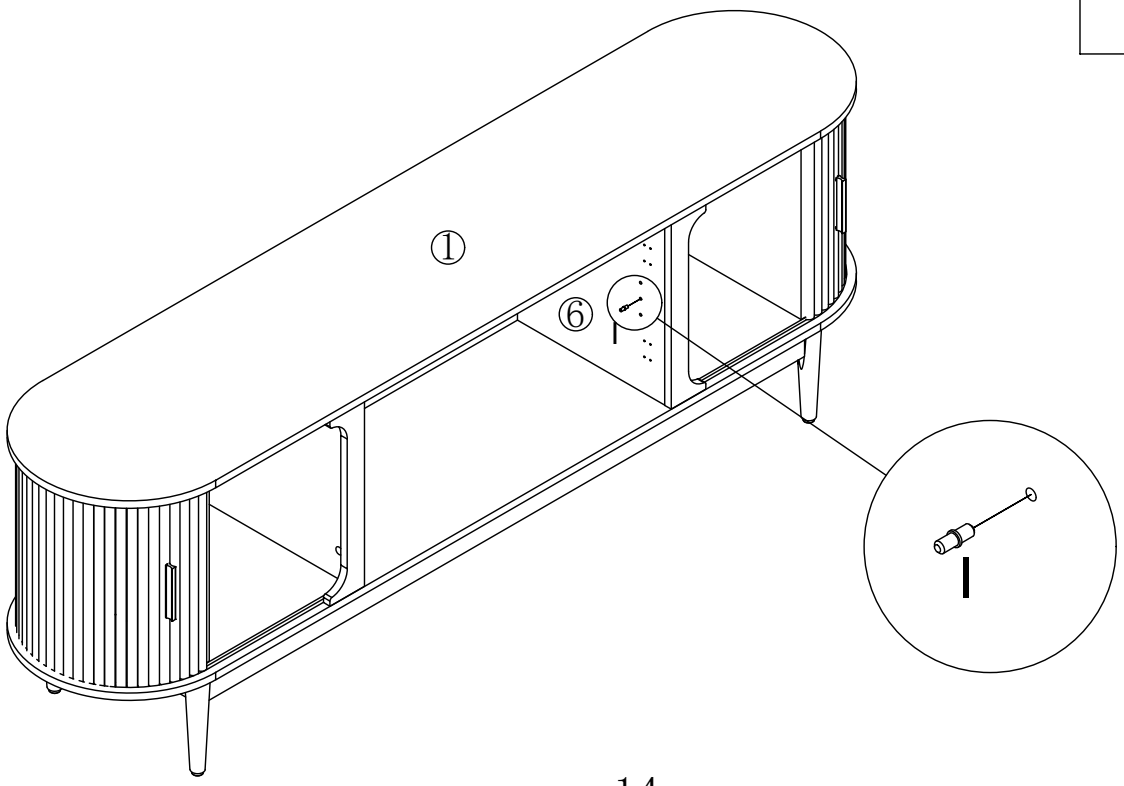


Step 15

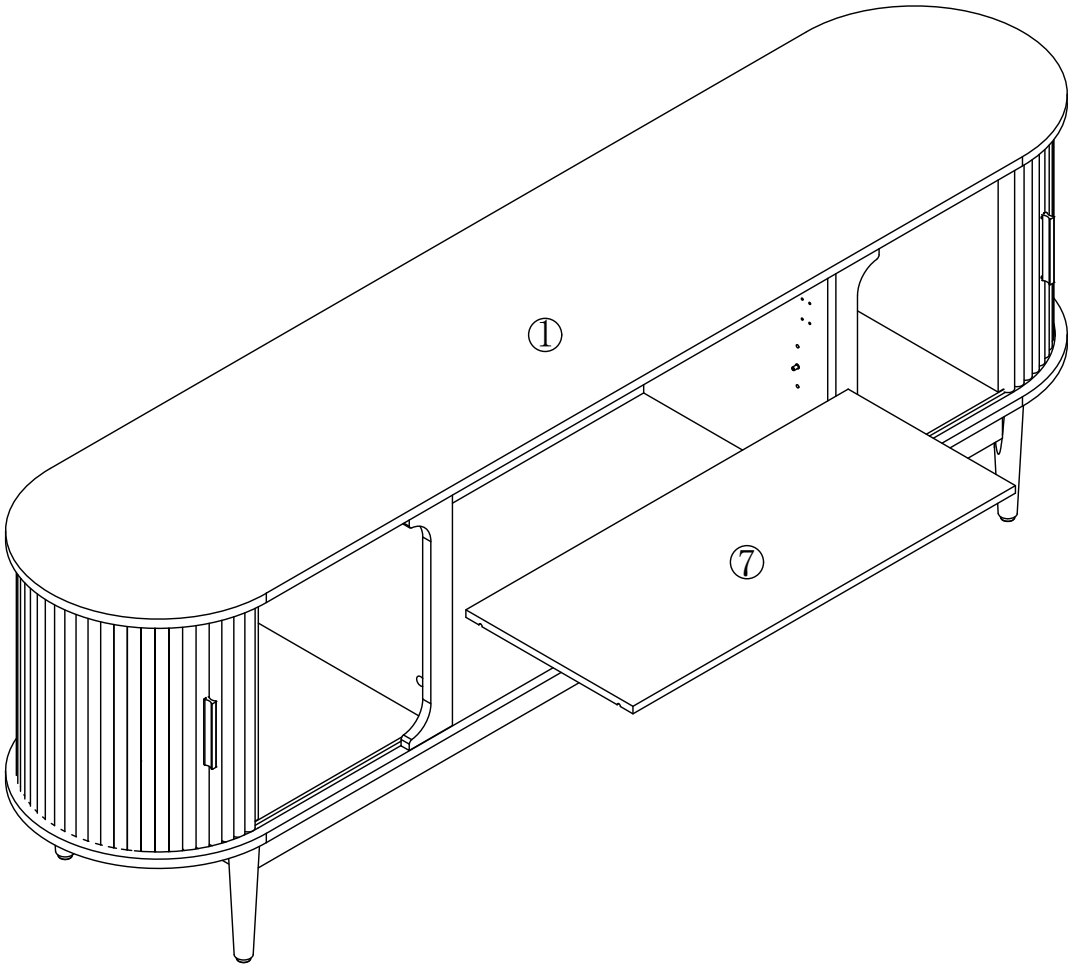


Step 16


E	×16
	

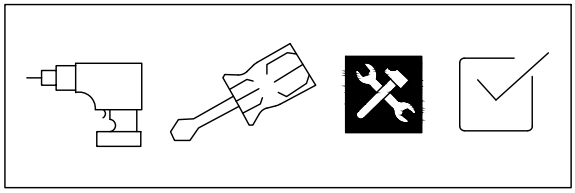


How do I get the two doors to align flat by adjusting the hinges?




1.Adjust the screws shown inFiqure 1 to adjust the door sup and down.



2.Adjust the screws shown inFig.2 and pull the door backand forth so that it can be opened smoothly.





3.Adiust the screws shown in Fiqure 3 to adjust the door left and right to the right position.





4.After the adjustment is complete, install the remaining two screws tosecure the door in place.


Step 17

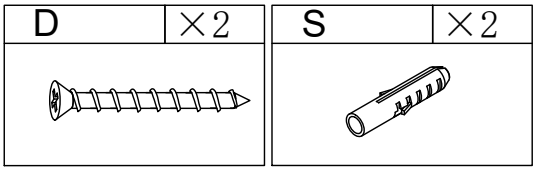

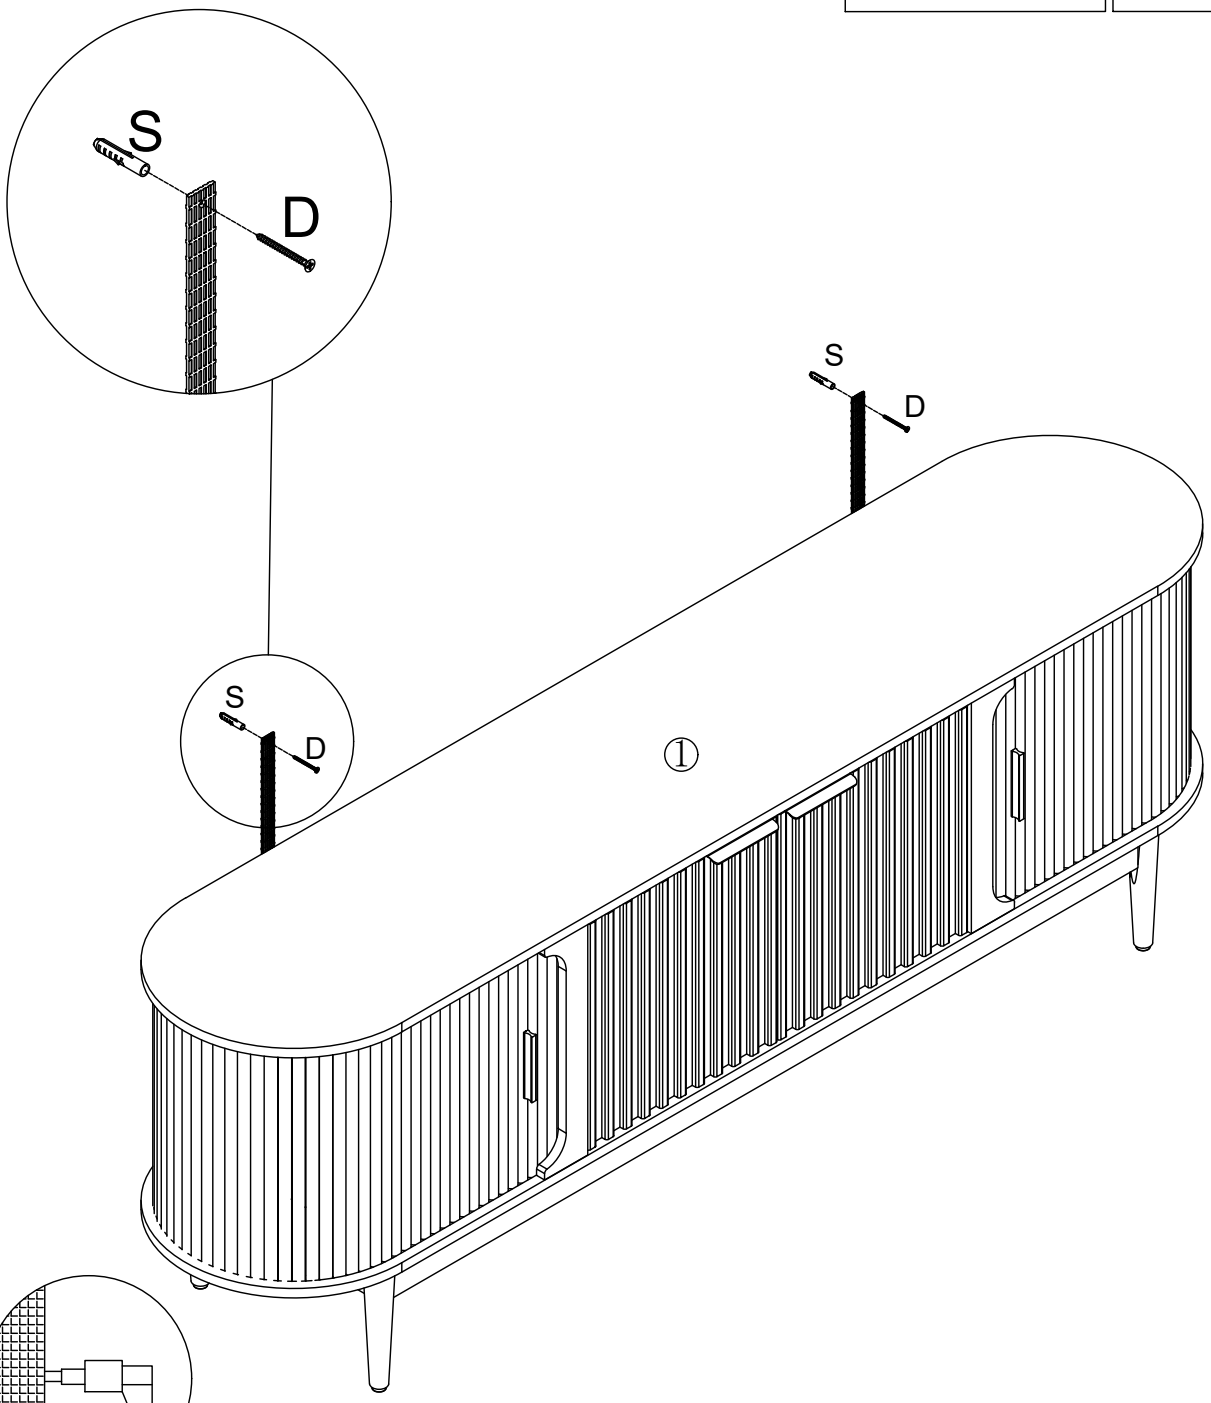







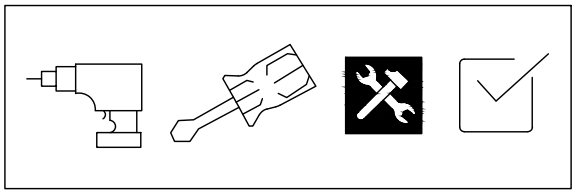

Step 18

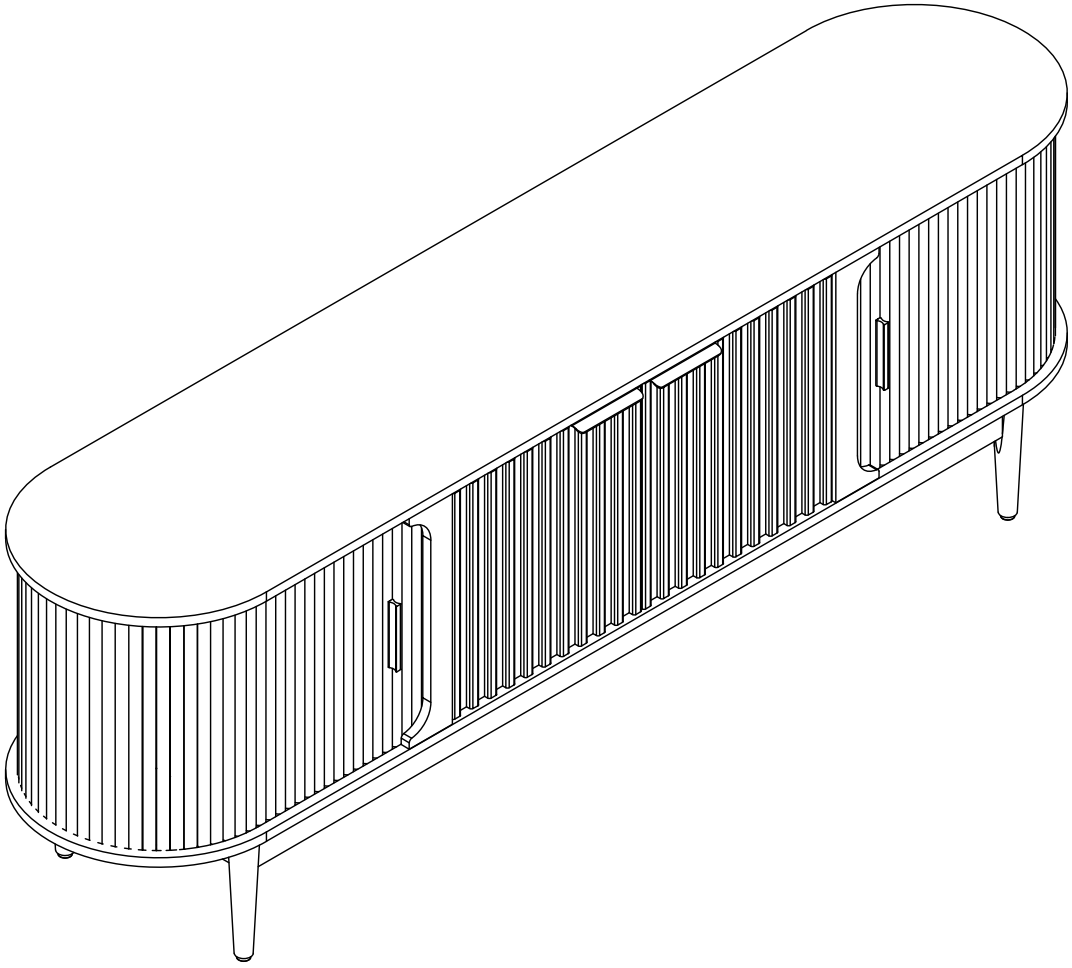

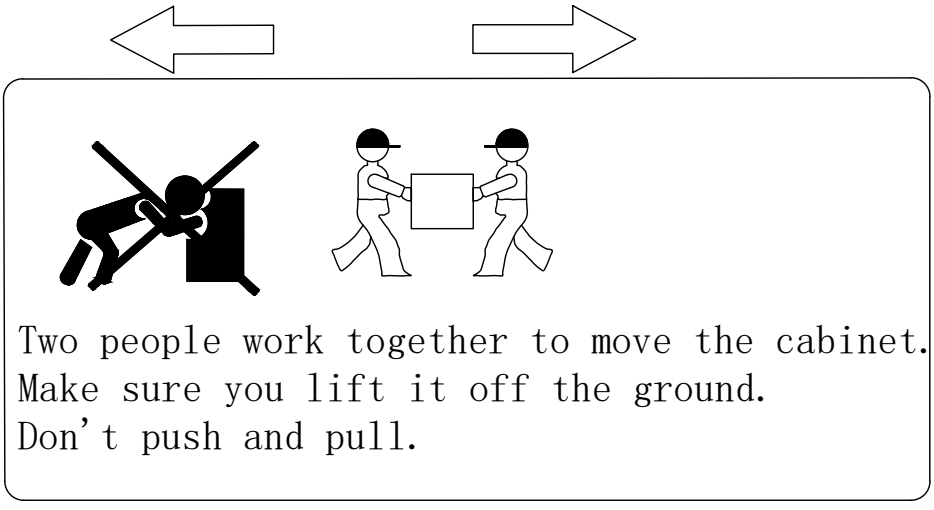

Two people work together to move the cabinet.
Make sure you lift it off the ground.
Don't push and pull.