


USER MANUAL

CAUTION

- 1) BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE IS REMOVED OR THE CIRCUIT BREAKER IS TURNED OFF. TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK.
- 2) DO NOT INSTALL OR USE THE LIGHT FIXTURE IF ANY PART IS MISSING OR DAMAGED.
- 3) TO PROTECT THE FINISH, DO NOT USE CLEANSERS OR ABRASIVES DURING MAINTENANCE.
- 4) TO AVOID POSSIBLE FIRE OR ELECTRICAL SHOCK, MAKE SURE NO BARE WIRE STRANDS ARE EXPOSED OUTSIDE WIRE CONNECTORS.



INSTALLATION DIAGRAM

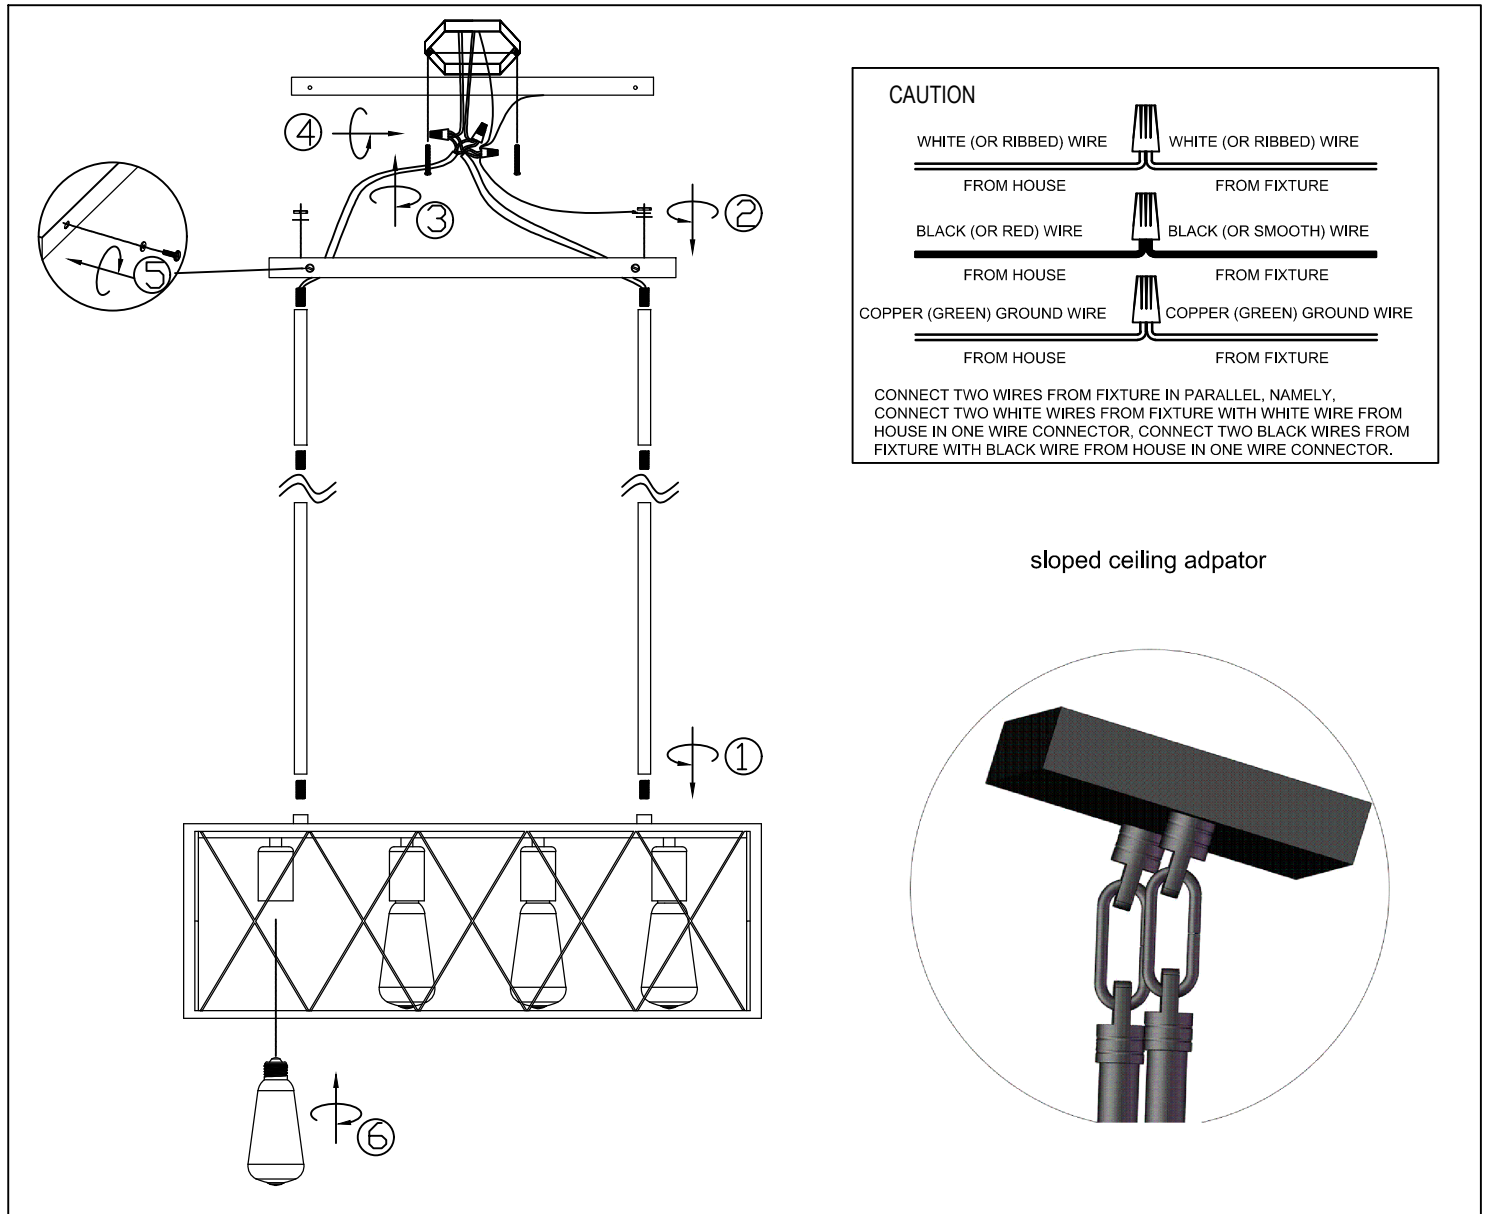

SPECIFICATION

Input Voltage:	110~120V 50/60Hz
Wattage:	E26 Max 60W per socket, bulb not included
Dimension:	Canopy Size: Length 17.72in (45cm)Width 4.37in (11.1cm)Height 0.87in (2.2cm)
	Fixture Size: Length 25.16in (63.9cm)Width 9.65in (24.5cm)Height 8.86in (22.5cm)
	3 set 11.81in (30cm) down rods, 1 set 5.91in (15cm) down rod, 1 set sloped ceiling adaptor