


Instruction Manual

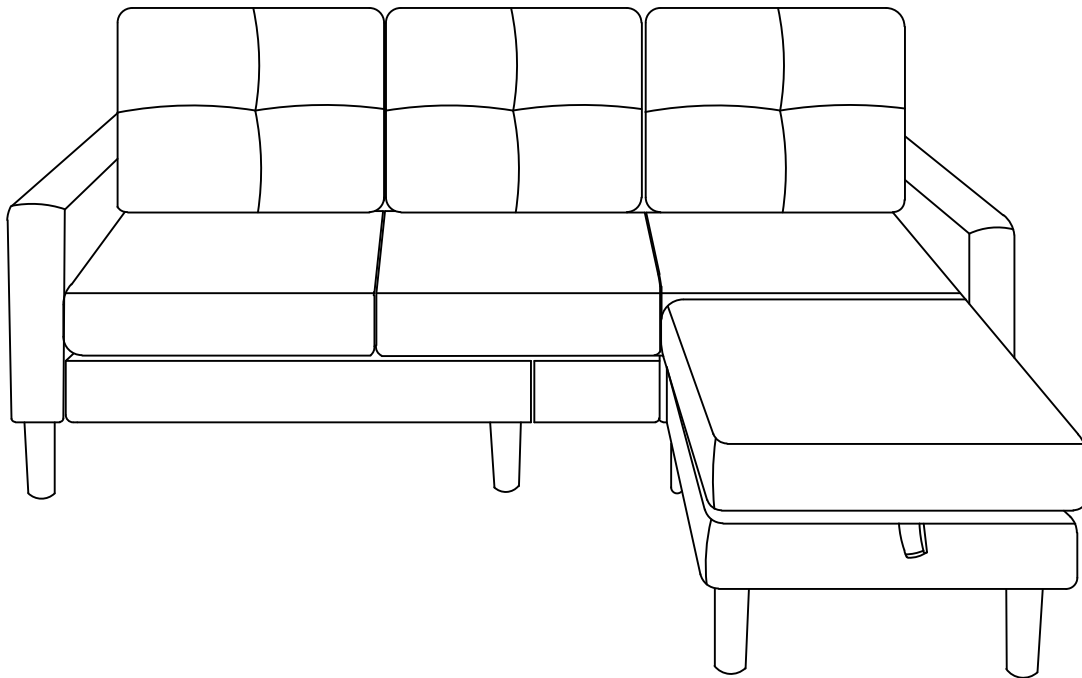

Thank you for shopping with us!

If any parts is missing, broken upon receipt or you need any help from us.

For the FASTEST solutions, please FIRSTLY CONTACT US at our after-sales email

This item comes in 2 boxes. If you receive only one, please wait for the other to arrive.
Thank you for your understanding and patience.



1. ASSEMBLY PREPARATION AND TIPS FOR ASSEMBLY

- 1). Remove all packaging materials, staples and packing straps from the carton.
- 2). Refer to Parts List and Hardware List, and ensure parts and hardware are correct before assembly.
Contact customer service for missing parts.
- 3). Place all parts on a clean, flat and soft surface (e.g. carpet or rug) to prevent scratch and damage to parts.
- 4). Allow ample room for assembly and assemble the product near where the product will be placed.
- 5). During assembly, do not over-tighten any fittings as this may cause damage.
- 6). Always place the product on a flat, level surface.


2. MAINTENANCE

- 1). Avoid direct sunlight, use blackout curtains or adjust placement to prevent fading and fiber brittleness.
- 2). Do not use bleach or rough tools to avoid scratching the fabric.
- 3). Use anti fouling pads when eating, and pet households should regularly clean their hair.

3. DAILY CARE

- 1). Use a vacuum cleaner to remove surface dust weekly, focusing on cleaning crevices and corner areas, and avoid using hard brush heads to prevent fabric damage.
- 2). Stain Removal: Immediately press and absorb spills with a clean towel. For oil stains, use baking soda to absorb and gently brush. For blood stains, dab lightly with cold salt water on deep cleaning.
- 3). Quarterly, dilute the fabric-specific cleaner and gently wipe. After cleaning, ensure ventilation or use a hairdryer on the cold setting to speed up drying.
- 4). Removable sofa covers require hand washing.

Exploded View

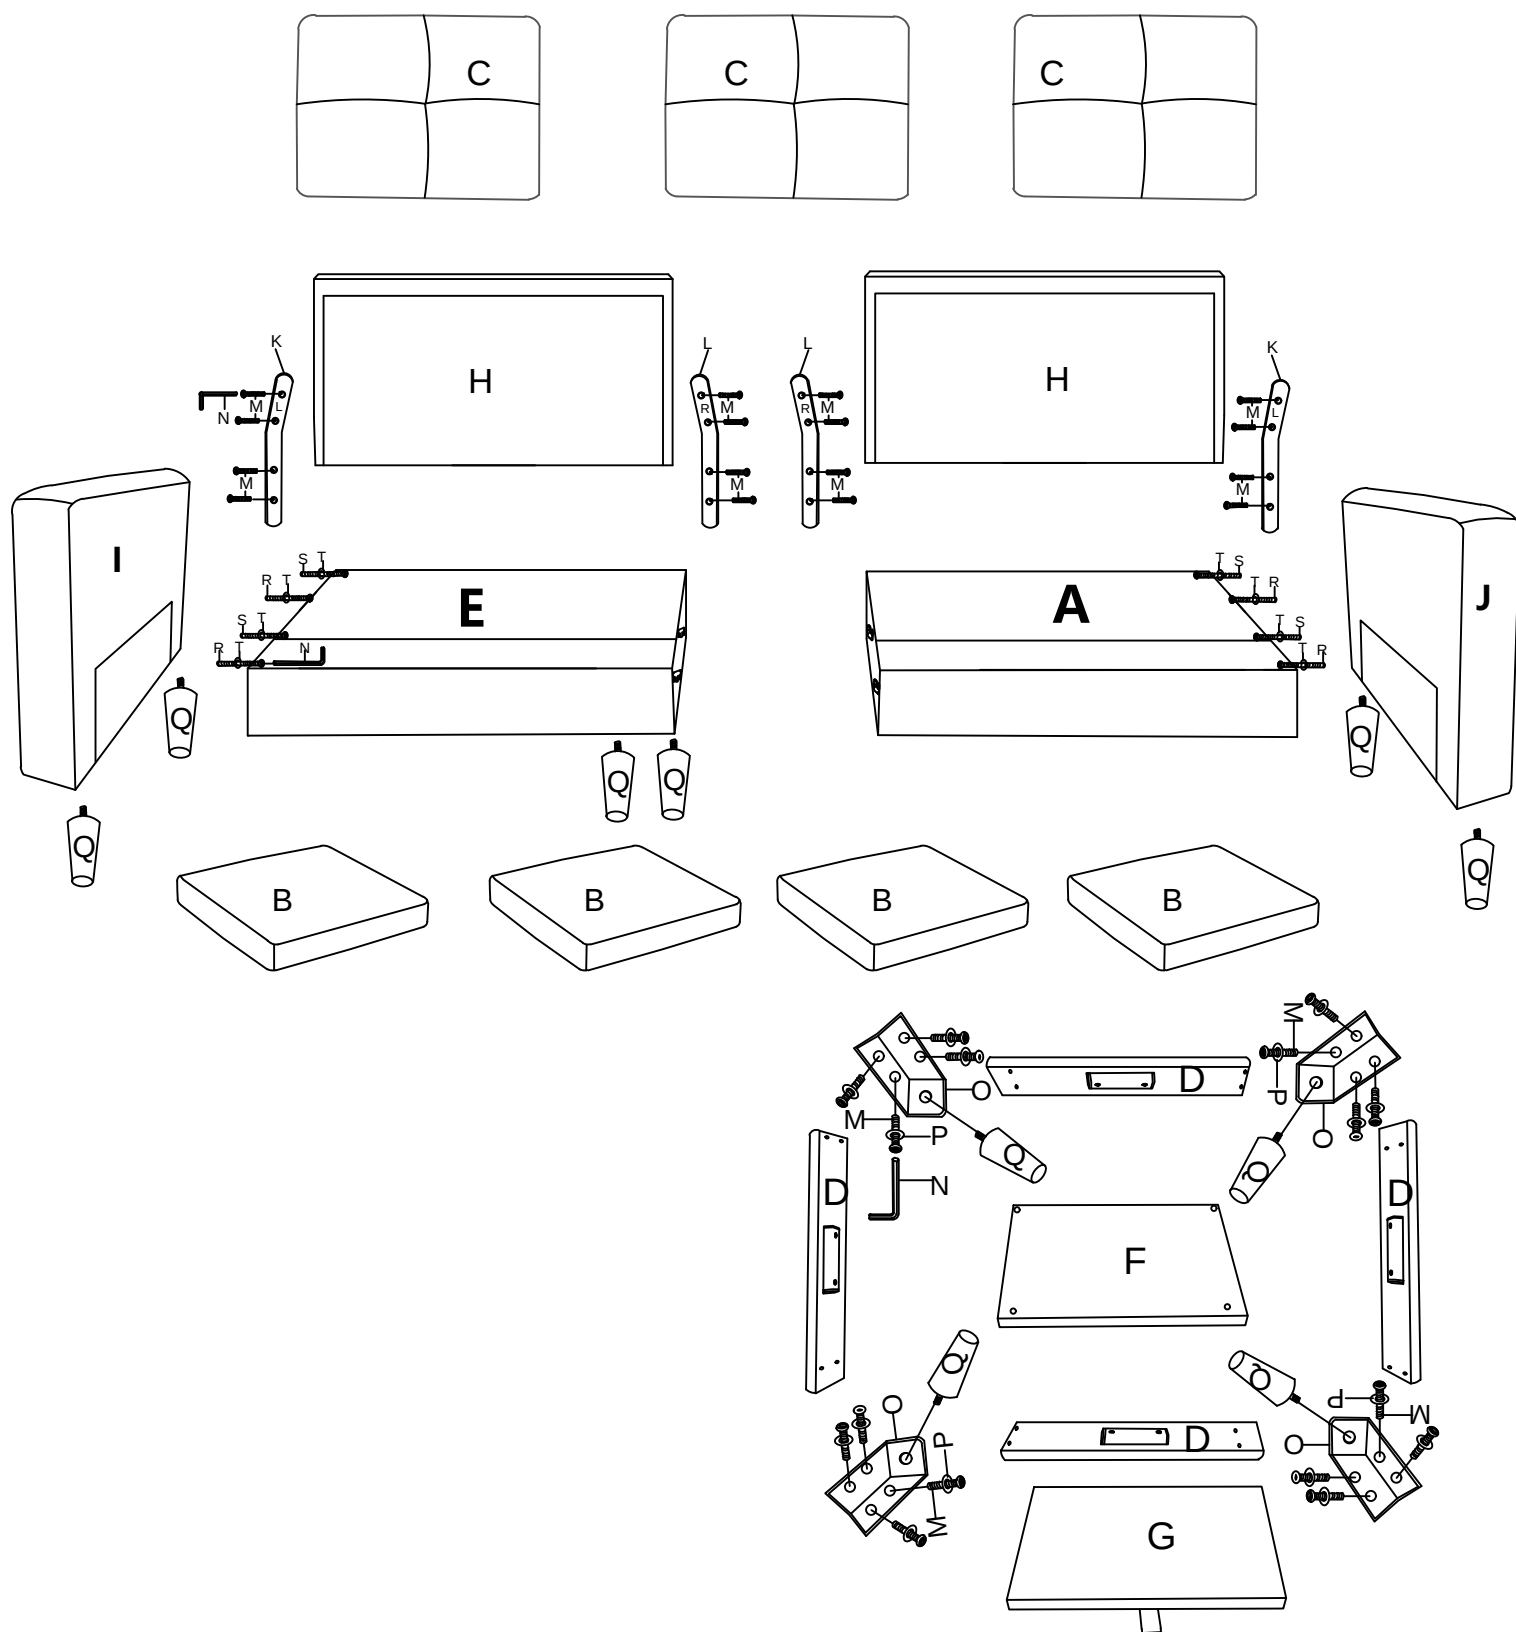

Note: All the parts marked with * are tucked under or with other parts

A diagram of a rectangular prism. A horizontal line segment is drawn on the front face, parallel to the top and bottom edges. This line segment is labeled with the letter 'a' at its right end.

Left seat frame(1)



Seat cushion(4)

Back cushion(3)

Foot pedal side pane(4)

Right seat frame(1)

Foot pedal base plate(1)

Foot pedal panel(1)

Backrest(2)

Left bracket(2)

A vertical rod with four circles and the letter R.

Right bracket(2)

6*16 Screw(32)



M4*100*30Wrench(1)

Foot pedal hardware(4)



16mm Black gasket(16)

Sofa foot(10)

6*35 Screw(4)



6*55 Screw(4)

16mm Color gasket(8)

Instruction Manual(1)

6*16 Screw(2)

©


16mmGasket(1)

Right armrest(1)

Left armrest(1)

Step 1

Get all the hidden parts out of A,E and I,J

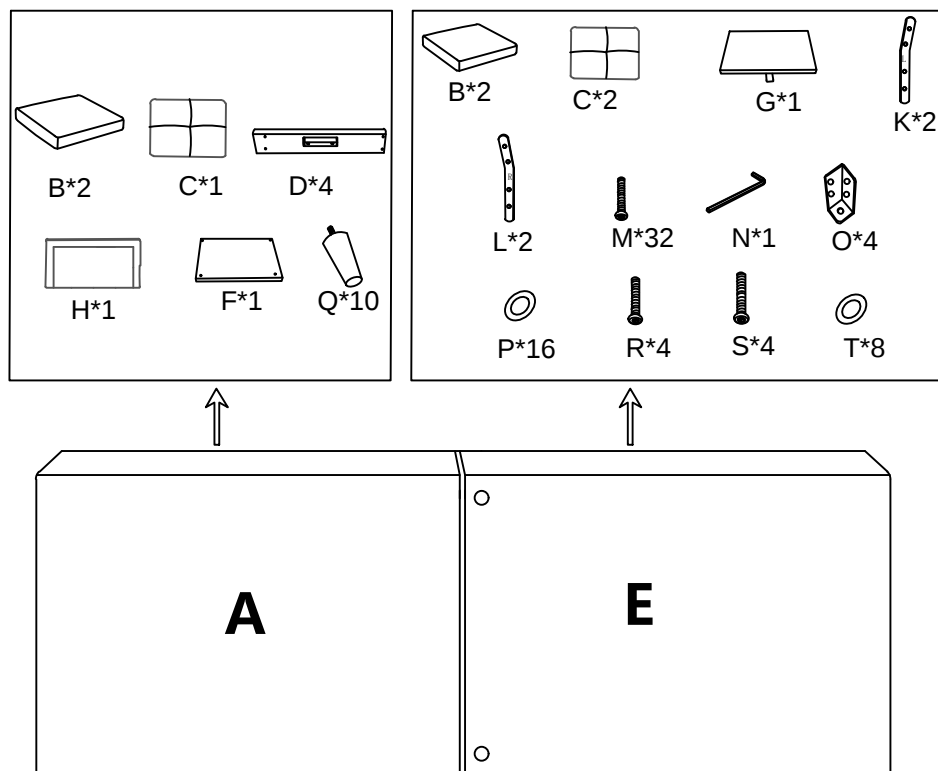

Step 2

Fix sofa foot to the sofa pedal base plate and the foot pedal hardware.

Note: Foot pedal hardware faces the smooth surface of the sofa pedal base


FX1



OX4












QX4

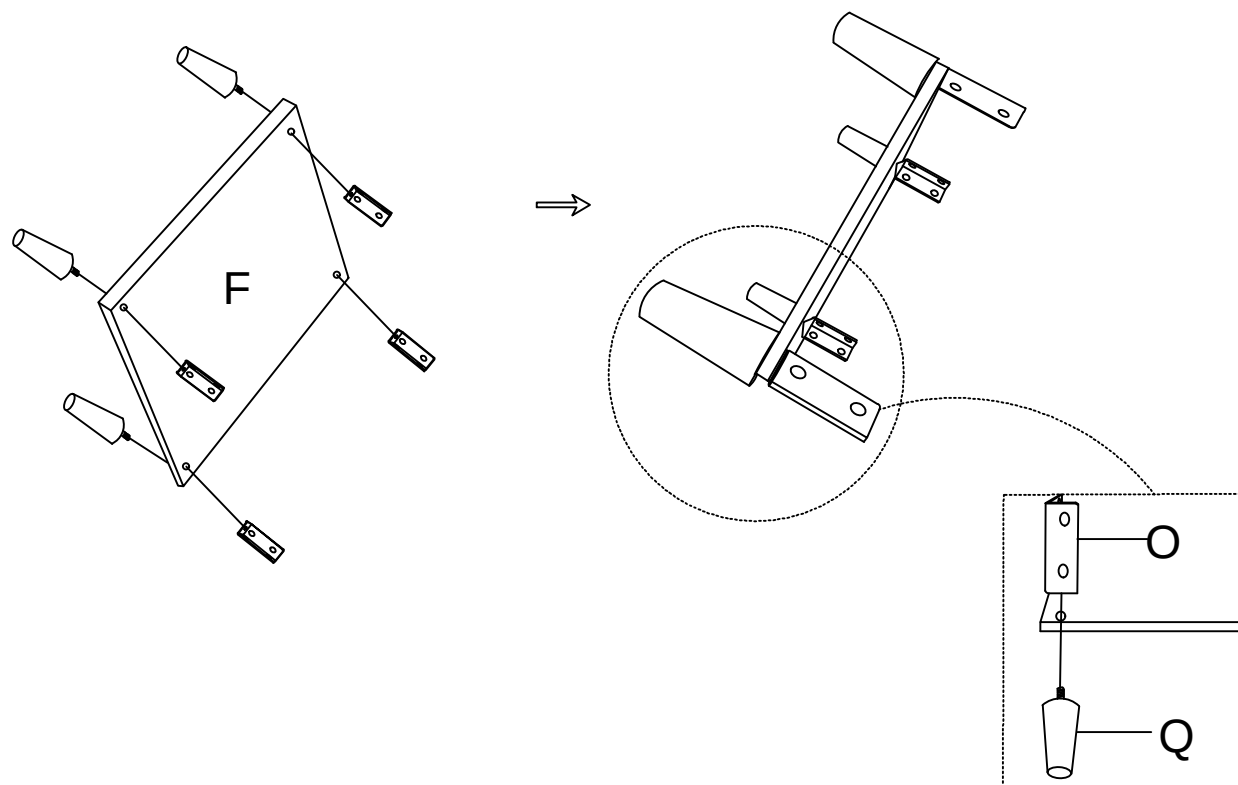

Step 3










Fix the side panel to the foot pedal hardware

Note: Do not tighten the screws to the foot pedal hardware till you put all of them in place

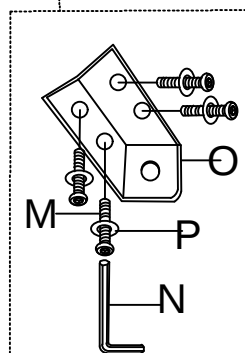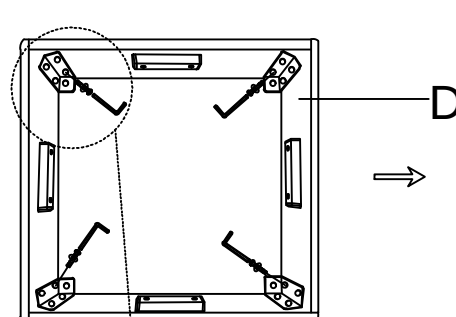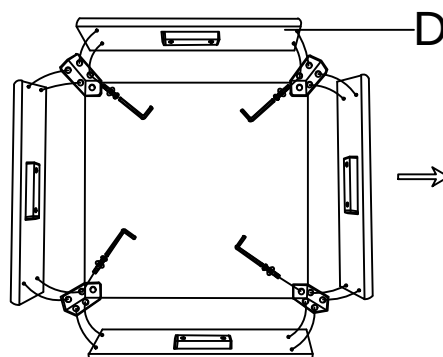








Step 4

Fix Left bracket K and Right bracket L to both sides of seat frame A

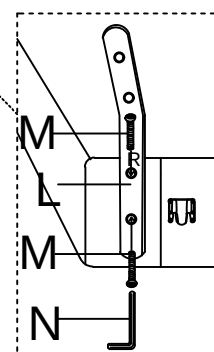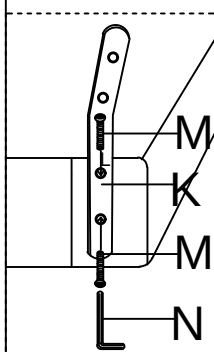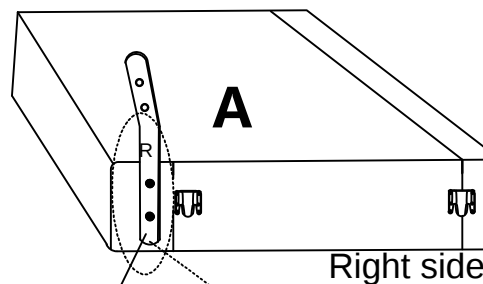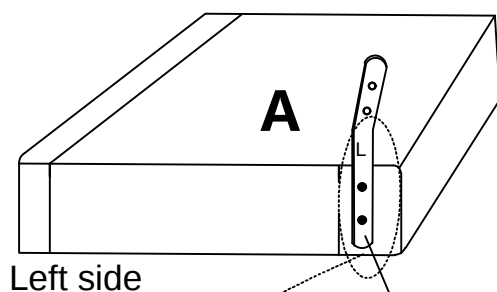










Step 5

Fix backrest H to seat frame A
Stick the back cloth to the bottom of A

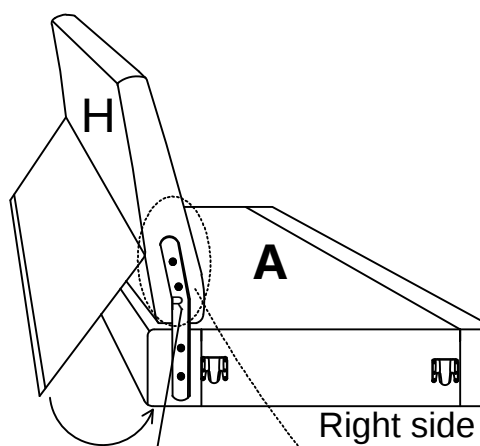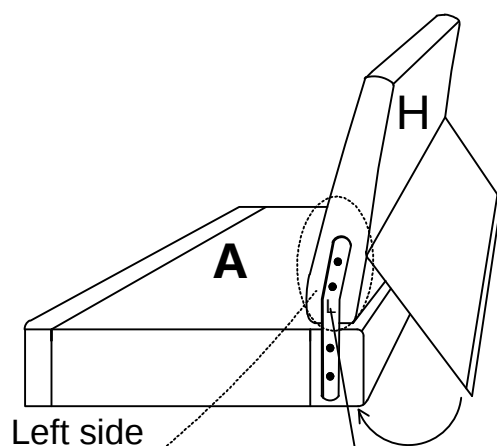








Step 6

Fix Left bracket K and Right bracket L to both sides of seat frame E

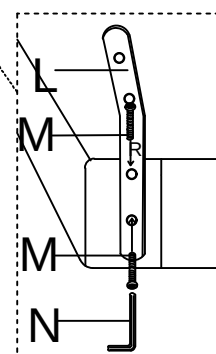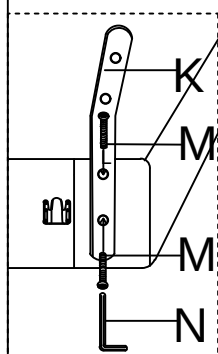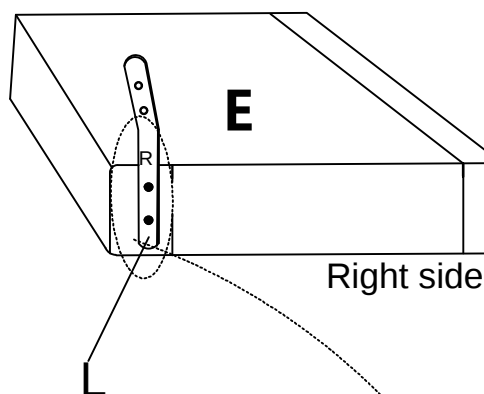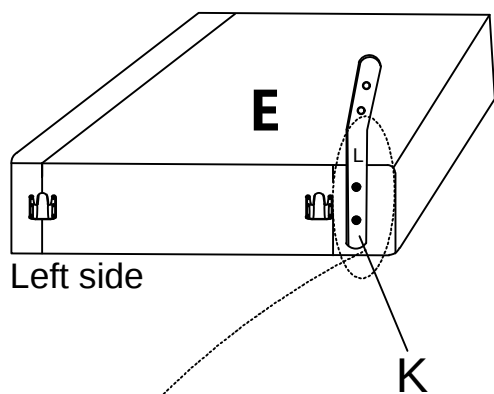








Step 7

Fix backrest H to seat frame E
Sitck the back cloth to the bottom of E

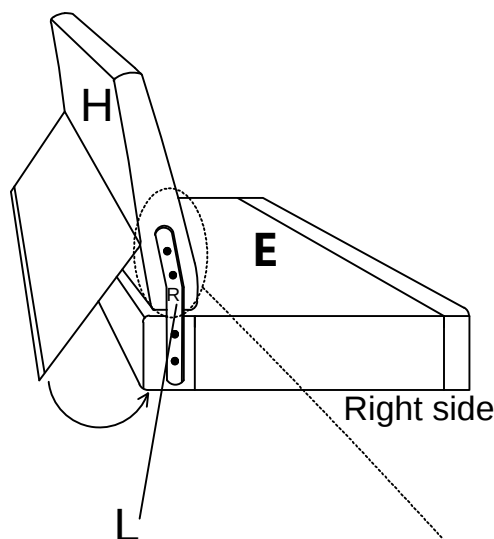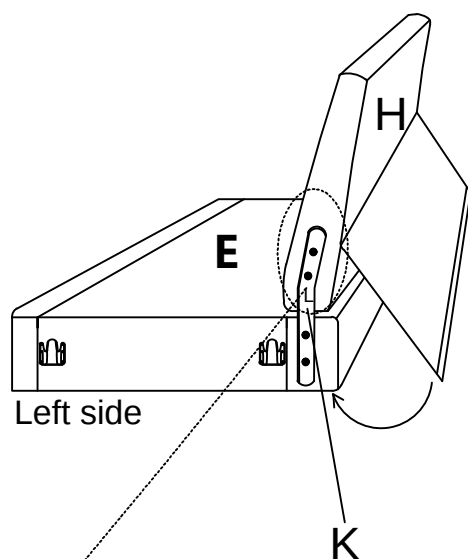

Step 8

Install the screw to connect the left
seat frame and left armrest

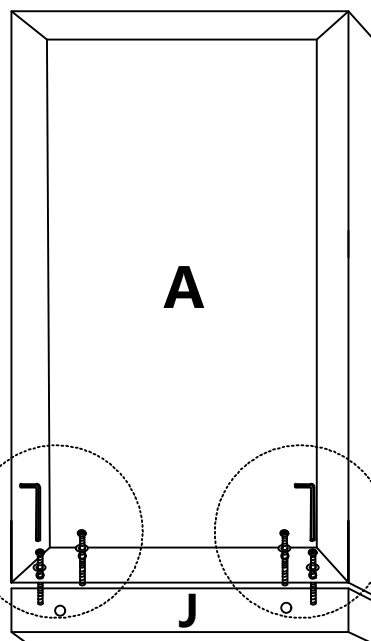



Step 9

Install the screw to connect the right seat frame and right armres

IX1






SX4



TX4




NX1

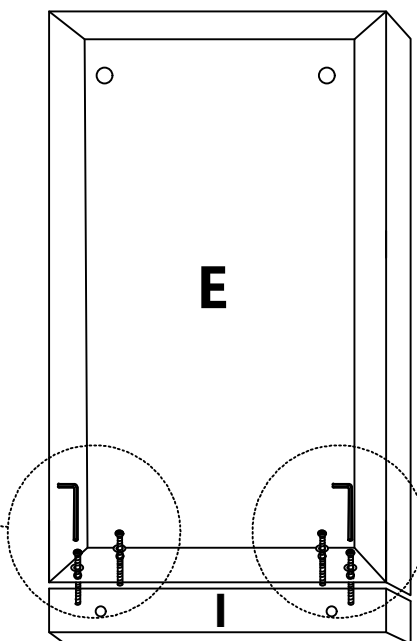

Step 10


Install the Legs Q

QX6

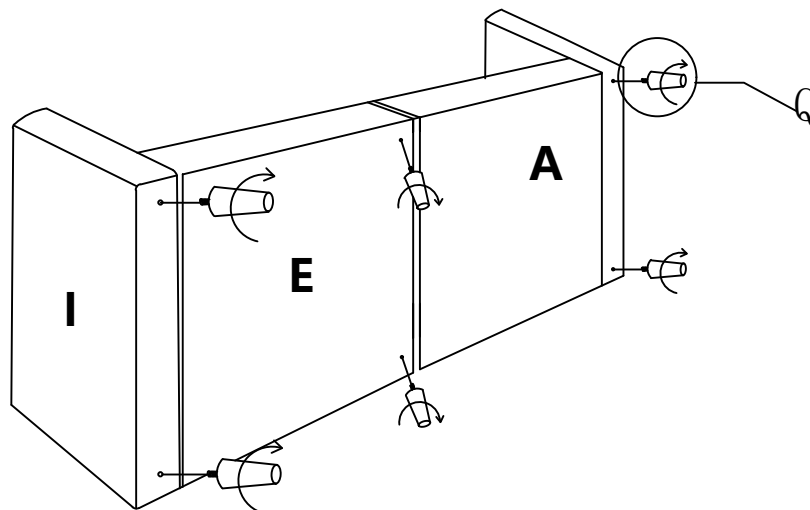




Step 11

Insert seat frame A to seat frame E

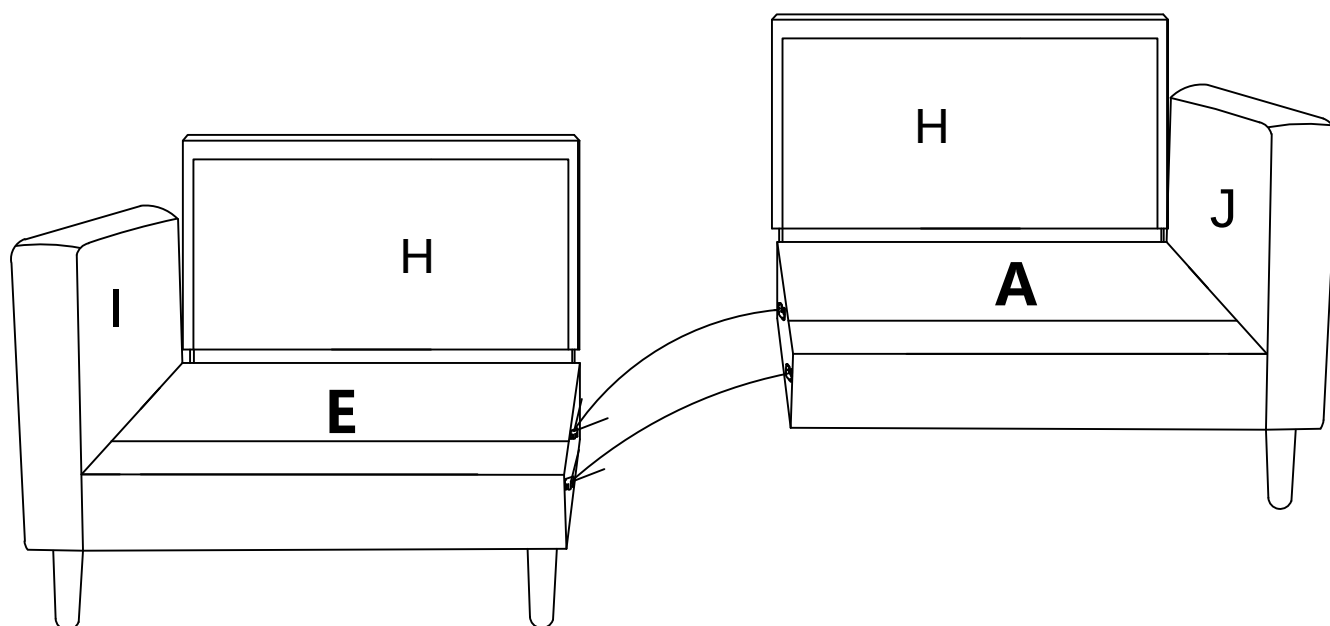


Step 12


Cut the compression bags. Tear open the Velcro on the back

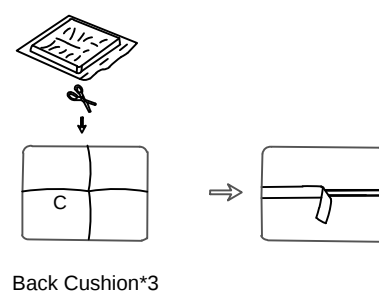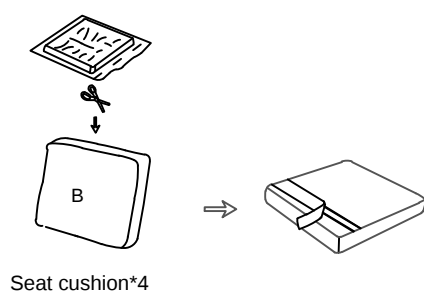

Step 1:
Cut open the packaging



Step 2:
Gently pat the top and
bottom sides of the cushion



Step 3:
Gently pat the left and
right sides of the cushion






Step 4:
After a few hours, the cushion
gradually becomes fluffy

Step 13

Put the seat cushion and then the back cushions on the sofa

Note: The Vecro on the cushion faces the front side of the seat base

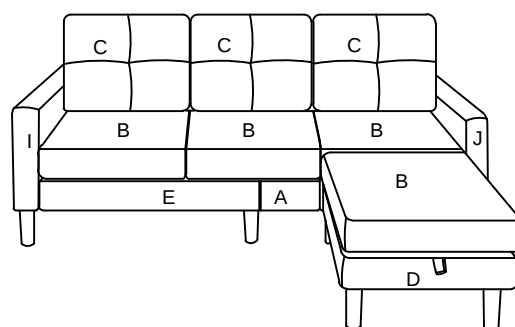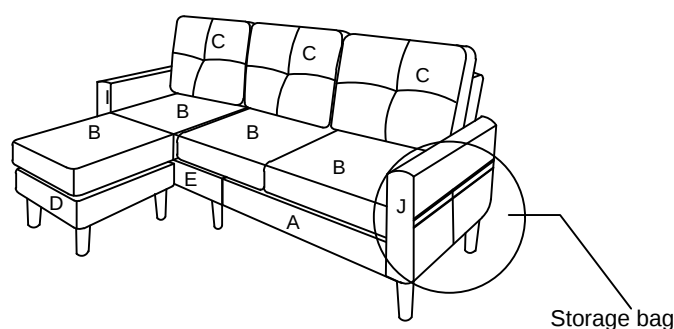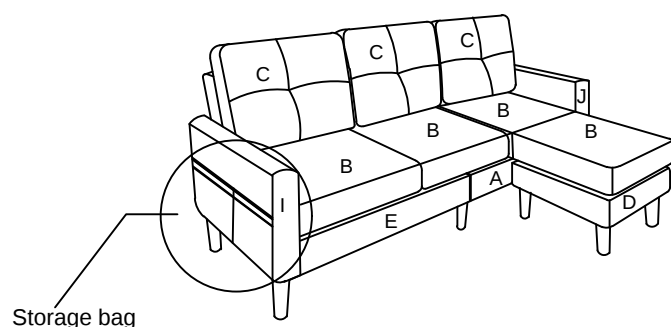

Tip:

1. Back cushions are compressed to prevent humidity and mold, sometimes it's inevitable to find some wrinkles when you get them out, you can iron them or use them to help them to get back into the original shape.
2. Hand wash is preferred for daily care.

Warning

Seller is responsible for the product-related issues occurred upon receipt, but will not be responsible for the personal injury, property damage or loss resulting from the incorrect assembly, improper use, inadequate maintenance or neglect of this product.