


Two Handle Centerset Lavatory Faucet

Applicable faucets (including but not limited)

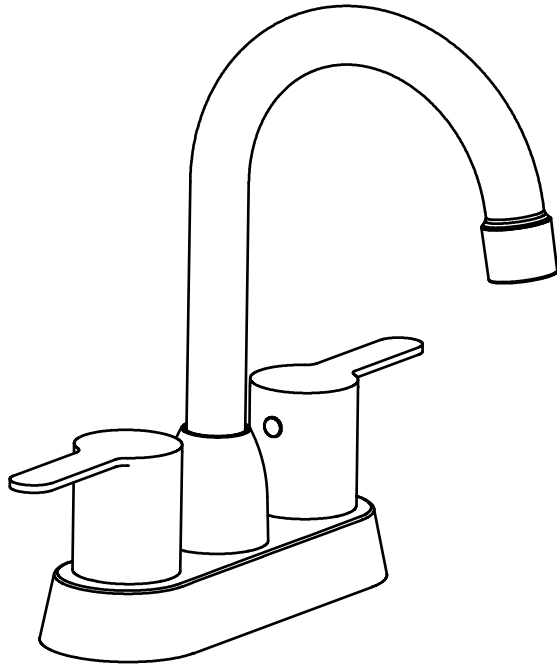

INSTALLATION


Prior to installation: Shut off water supply. Remove old faucet.
Clean sink/countertop surface in preparation for new faucet.

<p>1 Align and press into place.</p>	<p>2 Insert the faucet through sink.</p>	<p>3 Screw the nut onto shank, leaving approximately 0.12" (3mm) between the ring and the sink.</p>
<p>4 Tighten fitting nuts with adjustable wrench. Do not over tighten!</p>	<p>5 Remove excessive putty, adjust slightly the position of faucet.</p>	<p>6 Connect and tighten the supply hoses.</p>

TOOLS YOU WILL NEED




Adjustable wrench



Phillips screwdriver



Hex Wrench



Two Male Supply




pipe tape



Silicone sealant/Putty

7 Check for leaks.

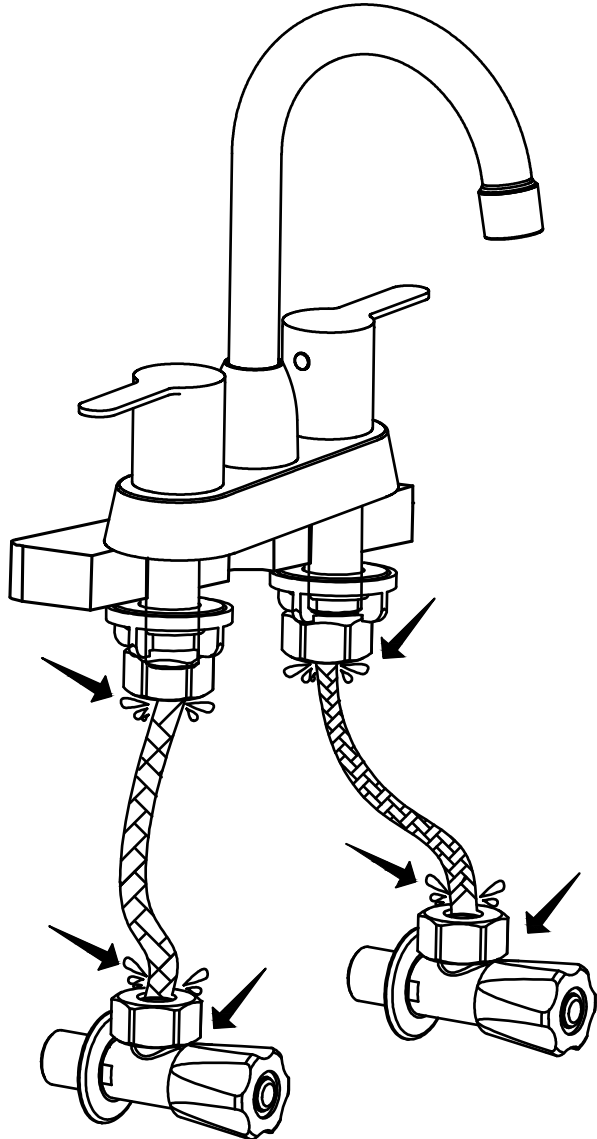

8 Care and Cleaning

For best results, keep the following in mind when caring for your product:

- Use a mild detergent such as liquid dishwashing soap and warm water for cleaning. Do not use abrasive cleaners that may scratch or dull the surface.
- Carefully read the cleaner product label to ensure the cleaner is safe for use on the material.
- Always test your cleaning solution on an inconspicuous area before applying to the entire surface.
- Do not allow cleaners to sit or soak on the surface.
- Wipe surfaces clean and rinse completely with water immediately after cleaner application. Rinse and dry any overspray that lands on nearby surfaces.

