


Product Installation Instructions

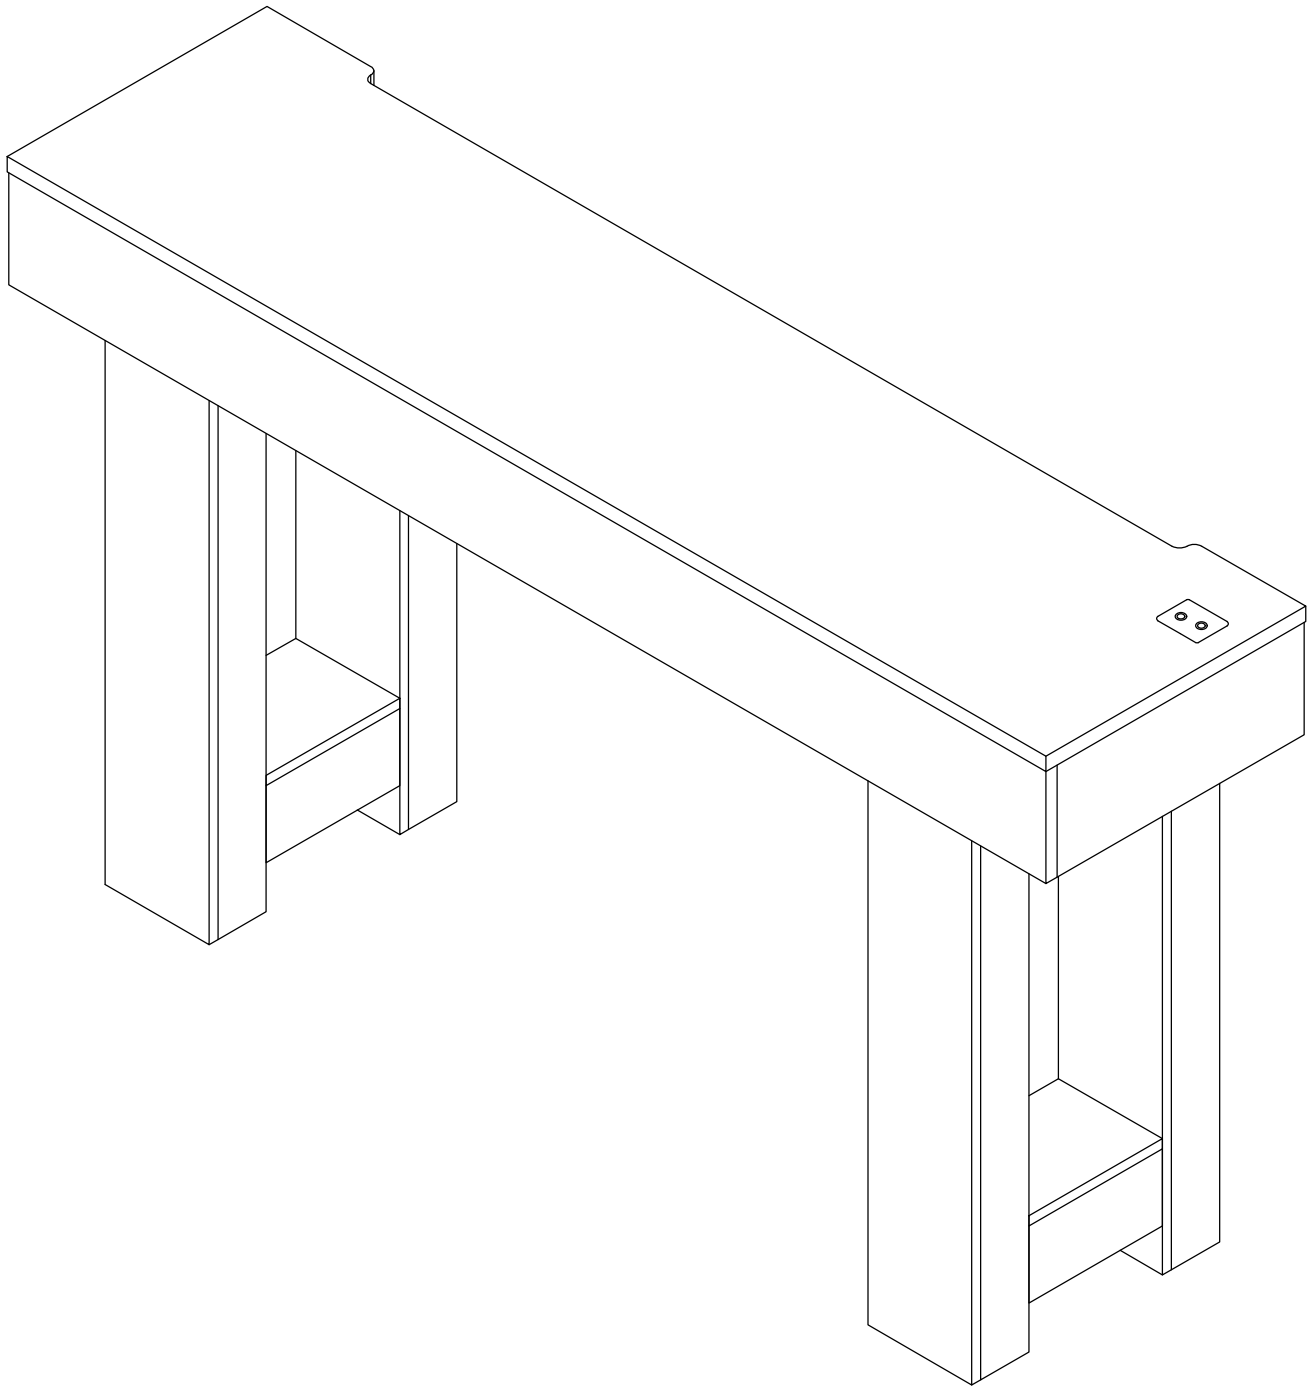





A x1




B x1




C x1




D x1




E x1




F x1

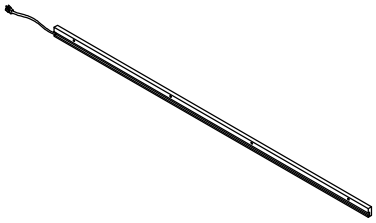


G x1




H x2




I x2




J x2




K x2




L x4




M x2




N x1



O x1








P x1




Q x1


1

Accessories list

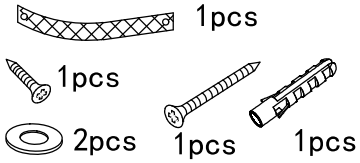1		Two In One Screw (6x28mm)	90pcs +9pcs
2		Two In One Nut (10x12mm)	90pcs +9pcs
3		Wood Chipping (6x30mm)	16pcs +2pcs
4		Non-slip pads (50x10mm)	8pcs +2pcs
5		Screw (5x40mm)	5pcs +1pcs
6		Screw (6x20mm)	4pcs +1pcs
7		anti-tipping tape Screw & gasket (3.5x12mm) Screw (4x45mm)	1pcs
		AC/DC Adapter (12V⎓2.0A)	1pcs




1pcs

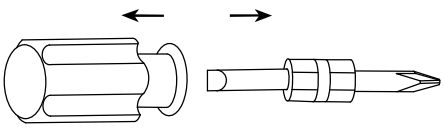


Double-head screwdriver, use as required

Product structure decomposition

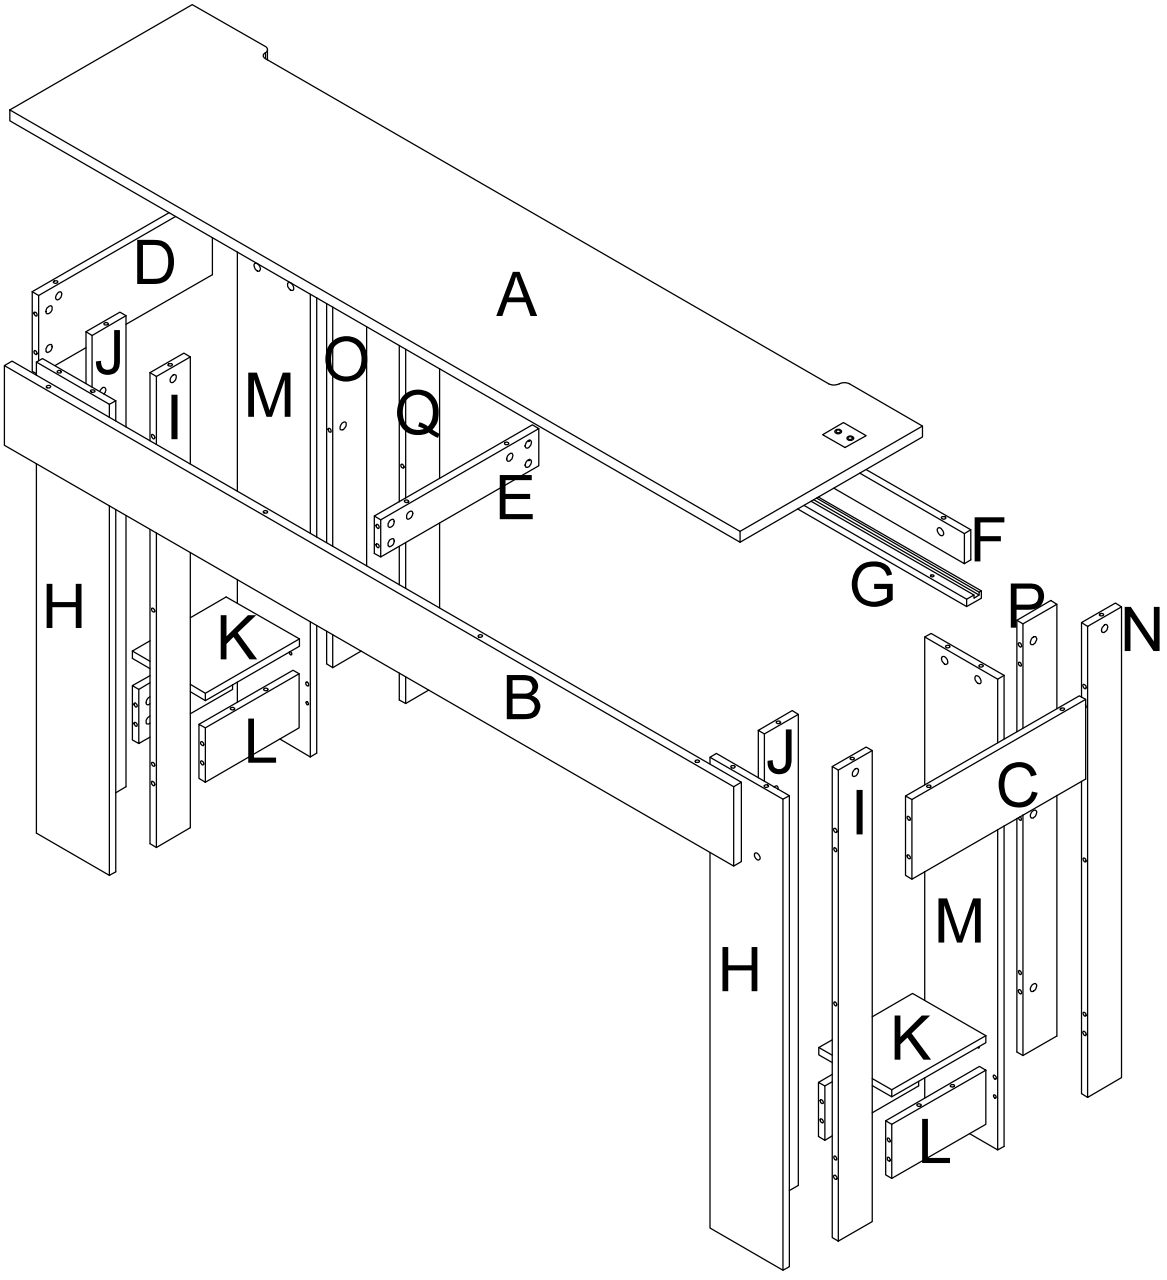


Use parts 1 and 2


Step1

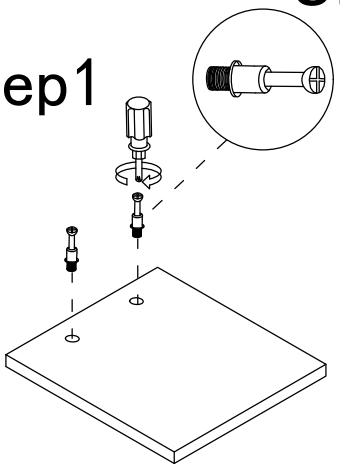


Step2

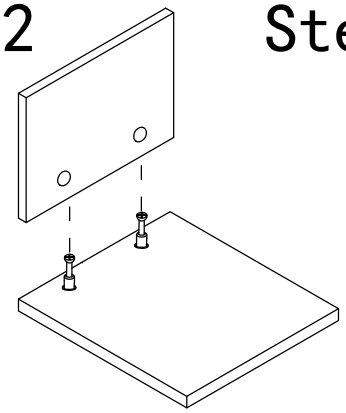


Step3

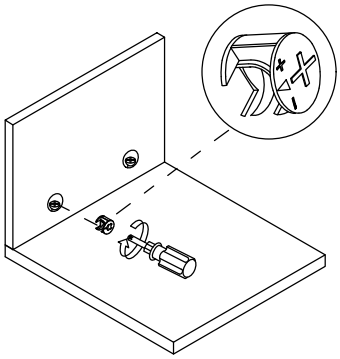

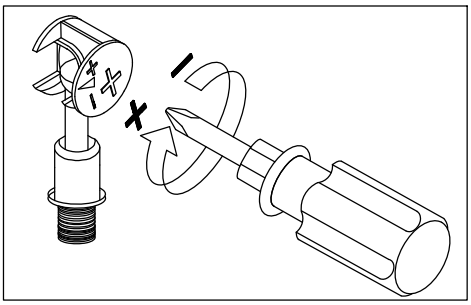


Use a screwdriver to lock in the direction of the "+" sign

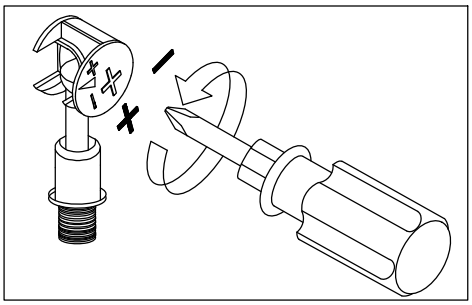


Disassemble along the direction of "-" sign

Step 1




Install 2-in-1 connector nuts into all holes.

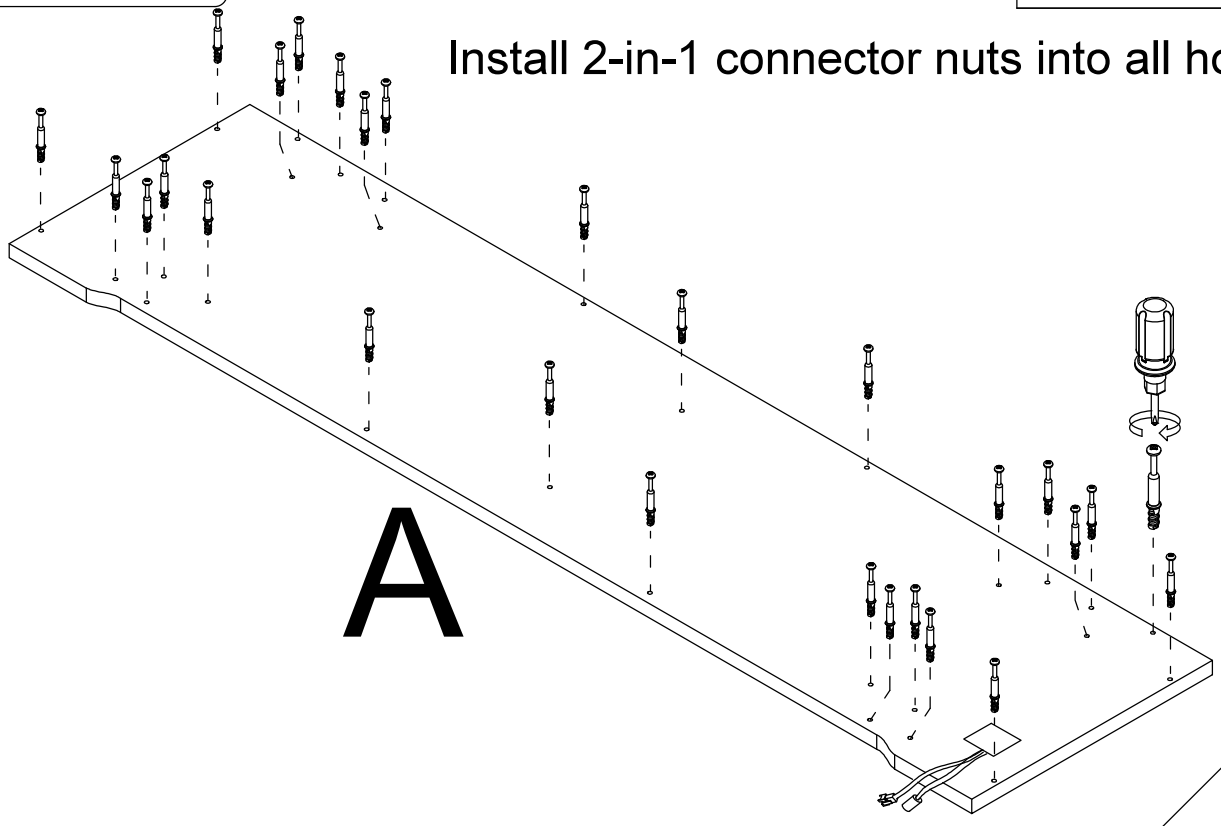


Step 2

1 x4

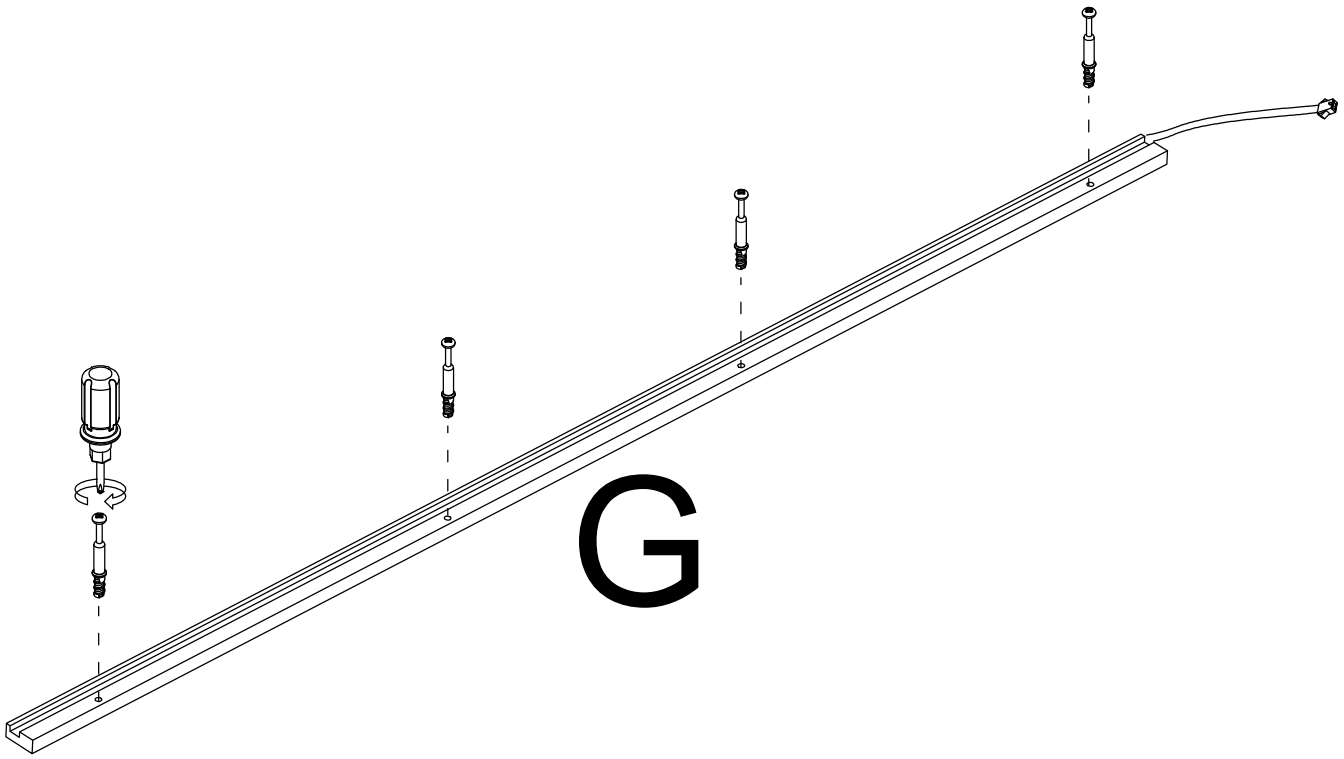

Step 3

2 x 4

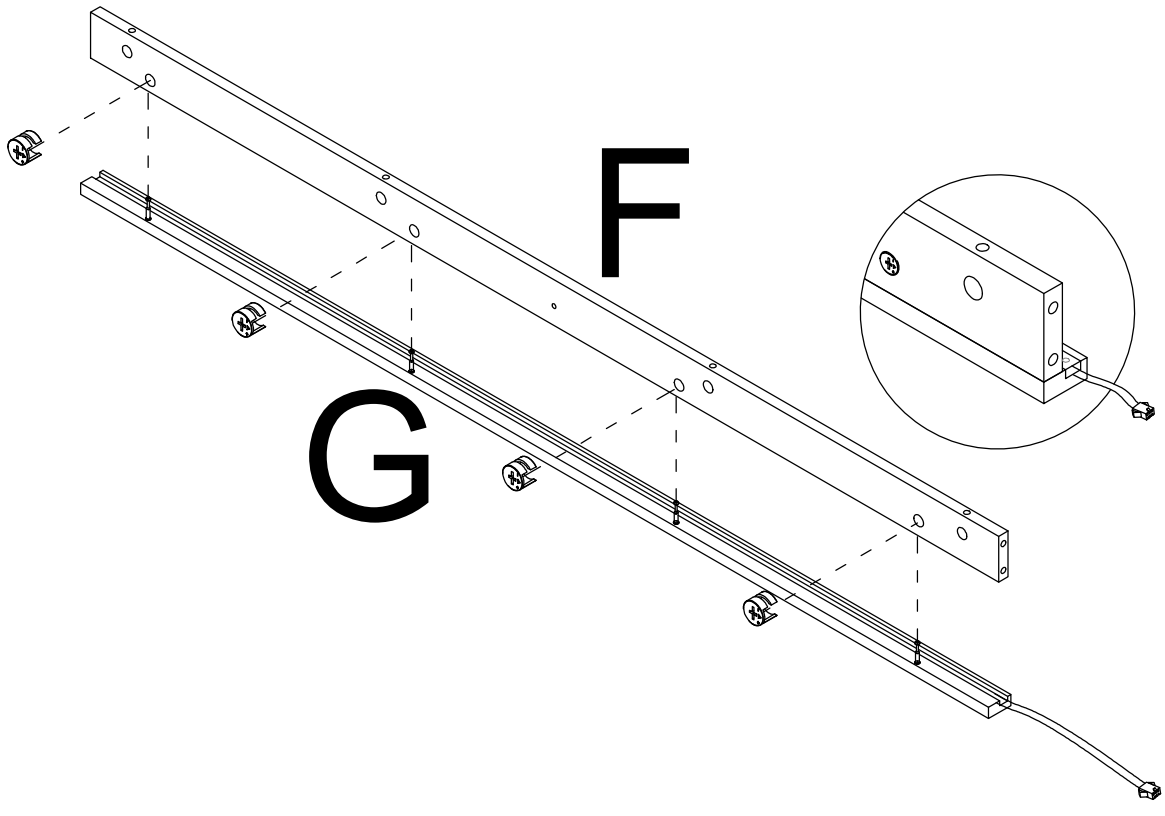


Step 4

2




x 4

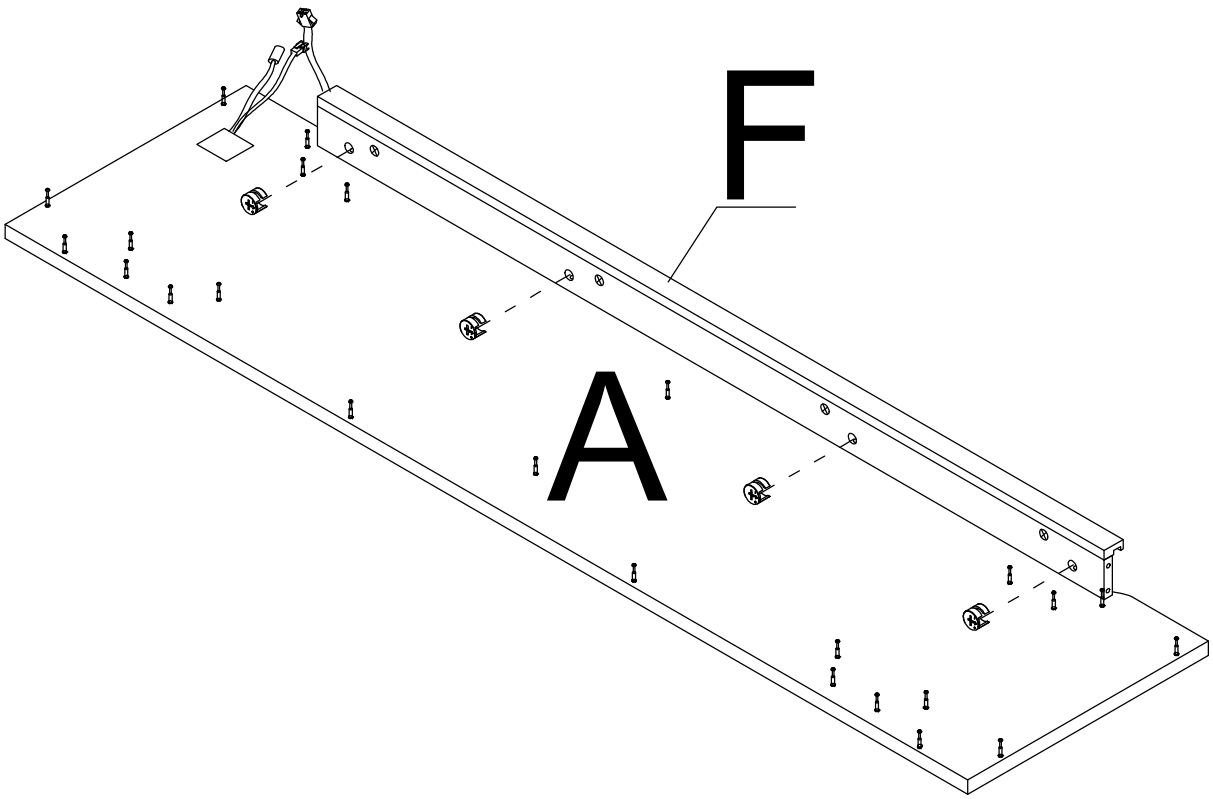

Step 5

1




x6

3



x4

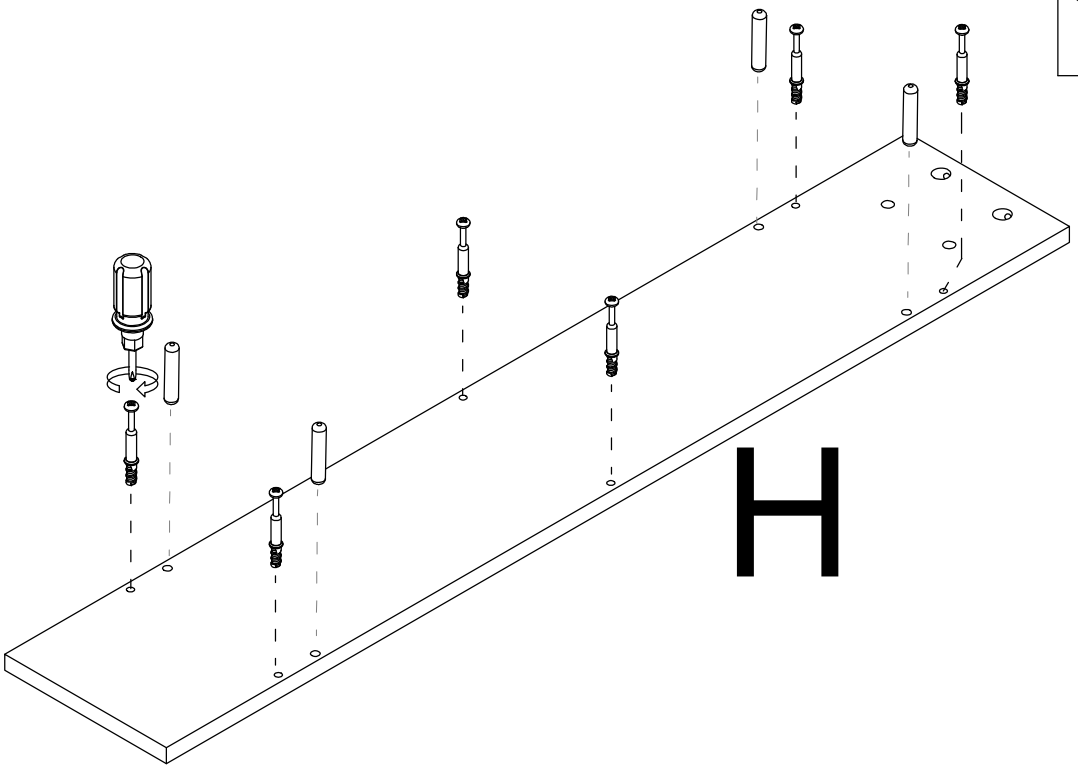


Step 6

2




x 6

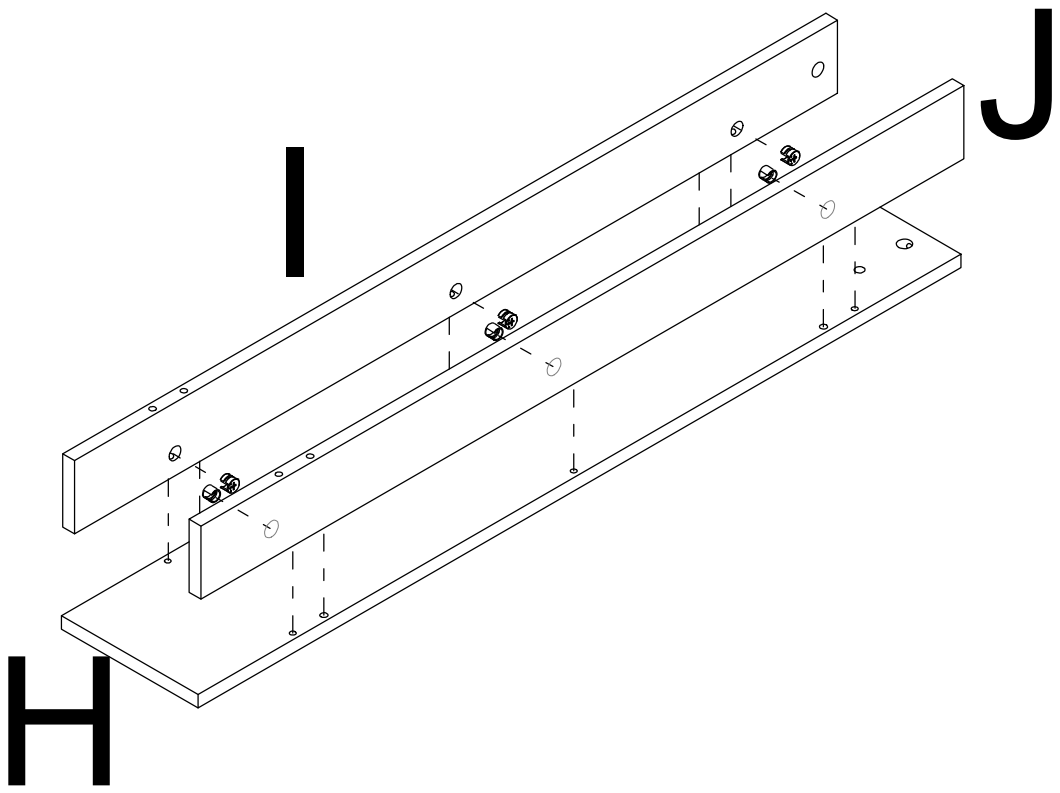


Step 7

1




x4

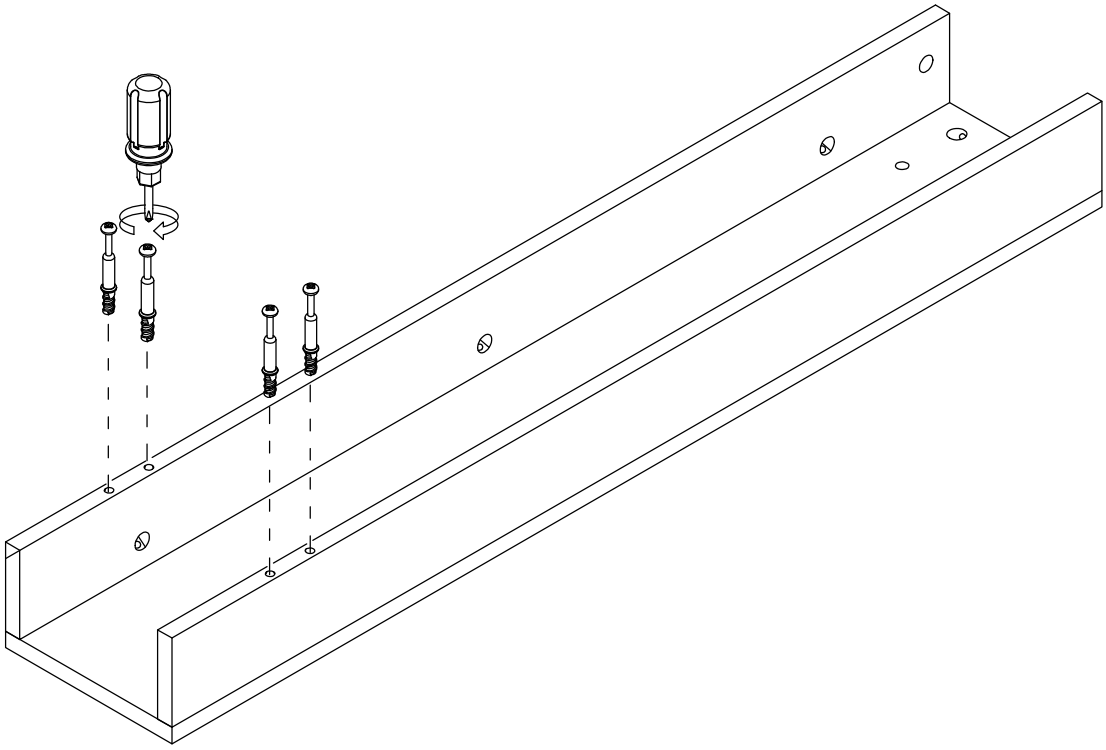


Step 8


1 x4

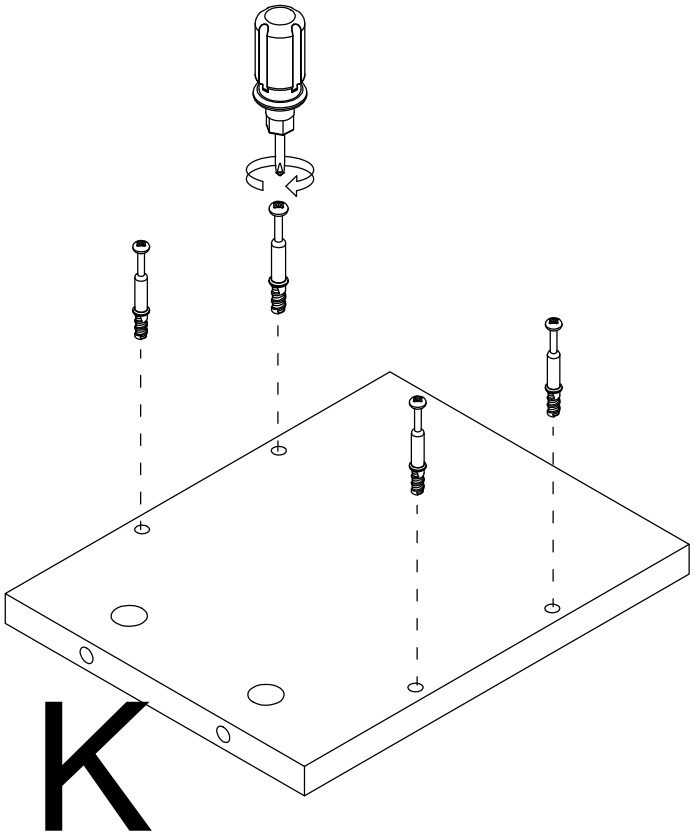

Step 9


2 x 4

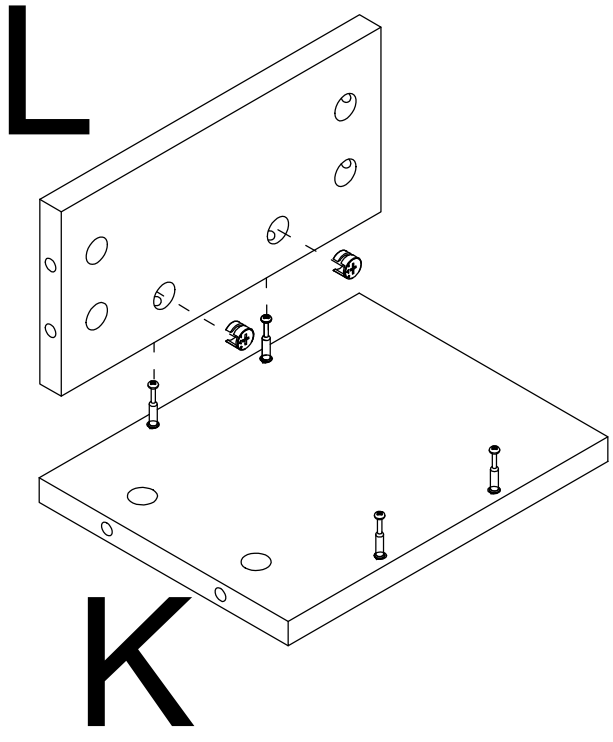

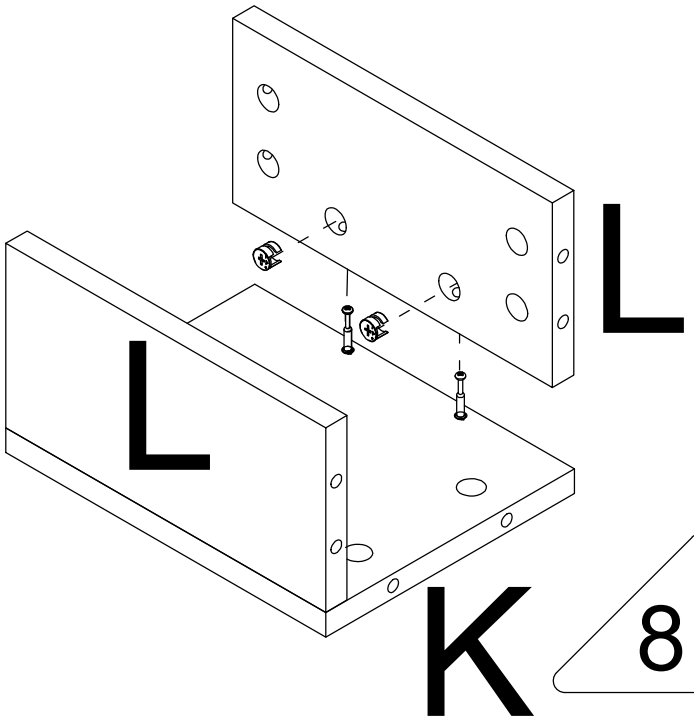

Step 10


Please align the orientation.

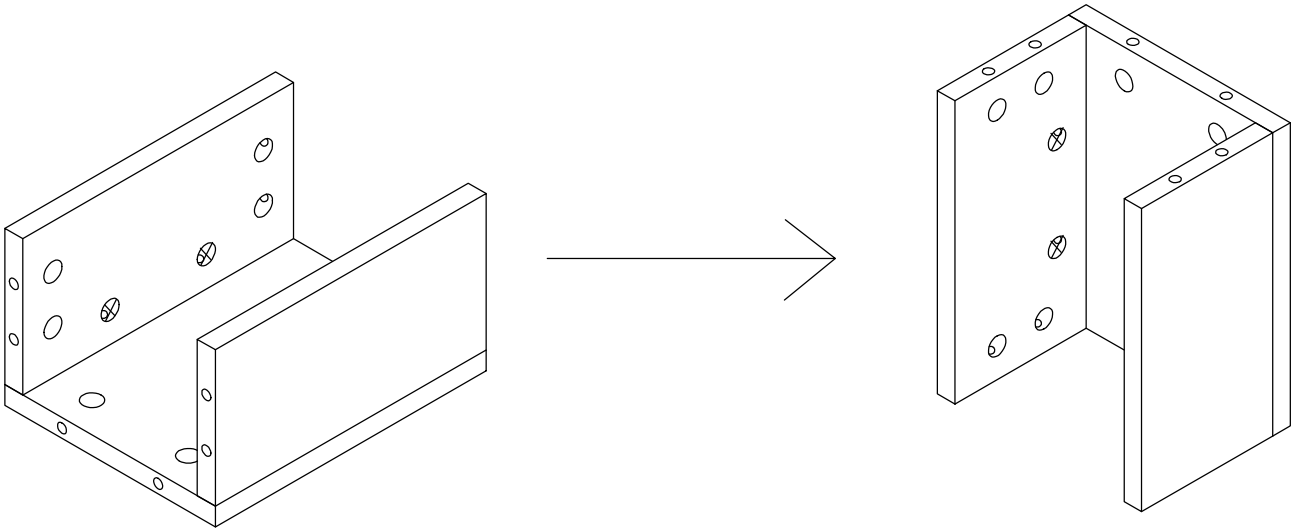


Step 11


Note hole orientation

2  x 4

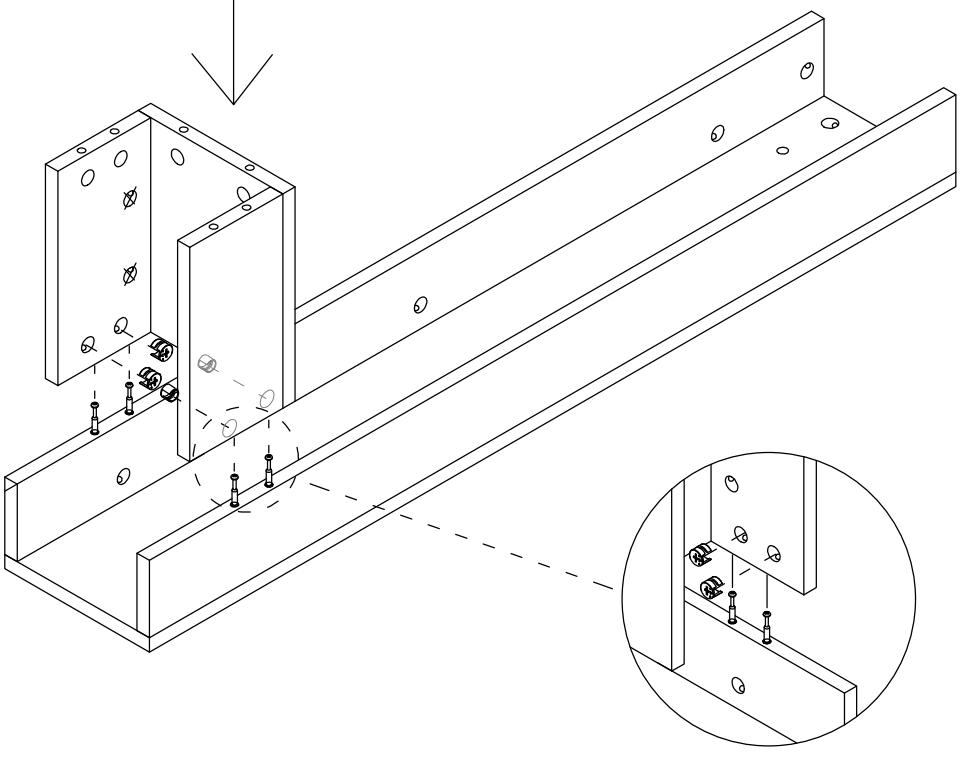



Step 12



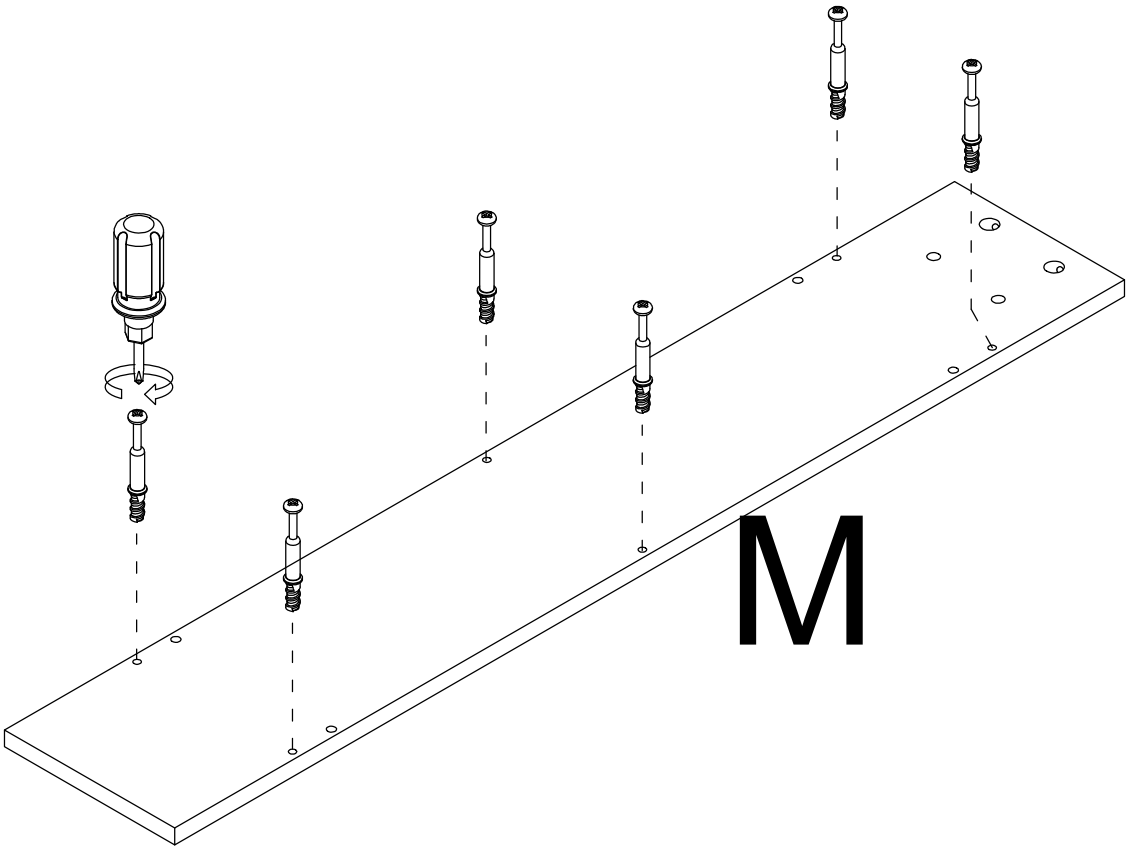


Step 13



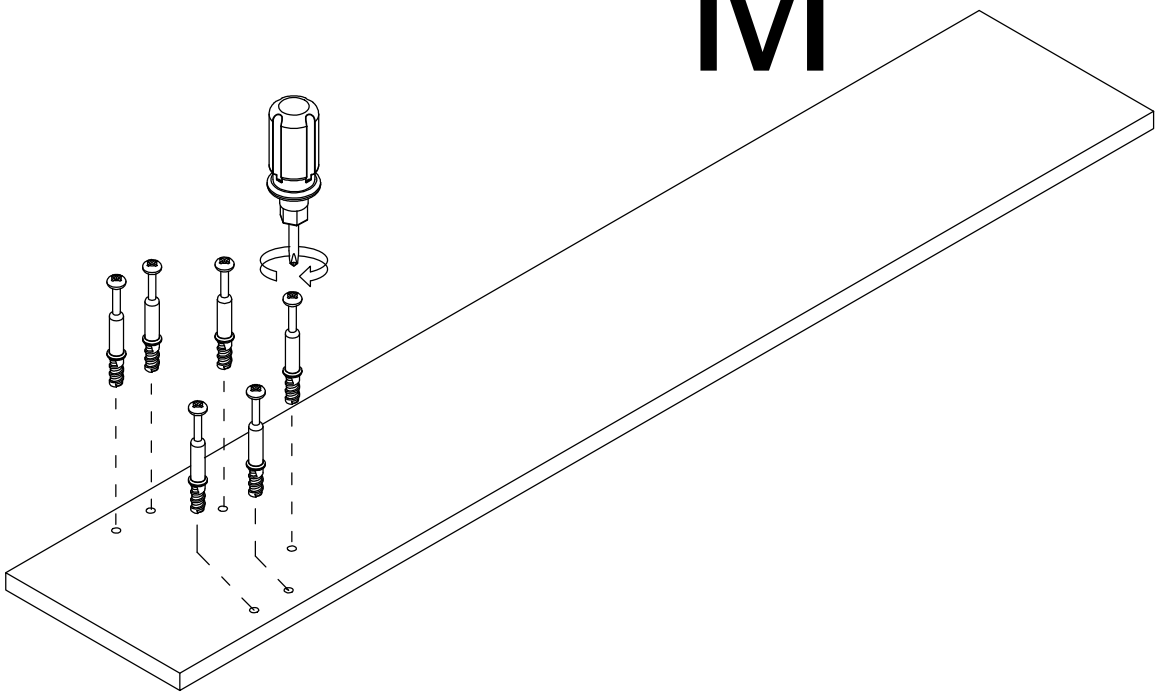

Step 14


2 x 4

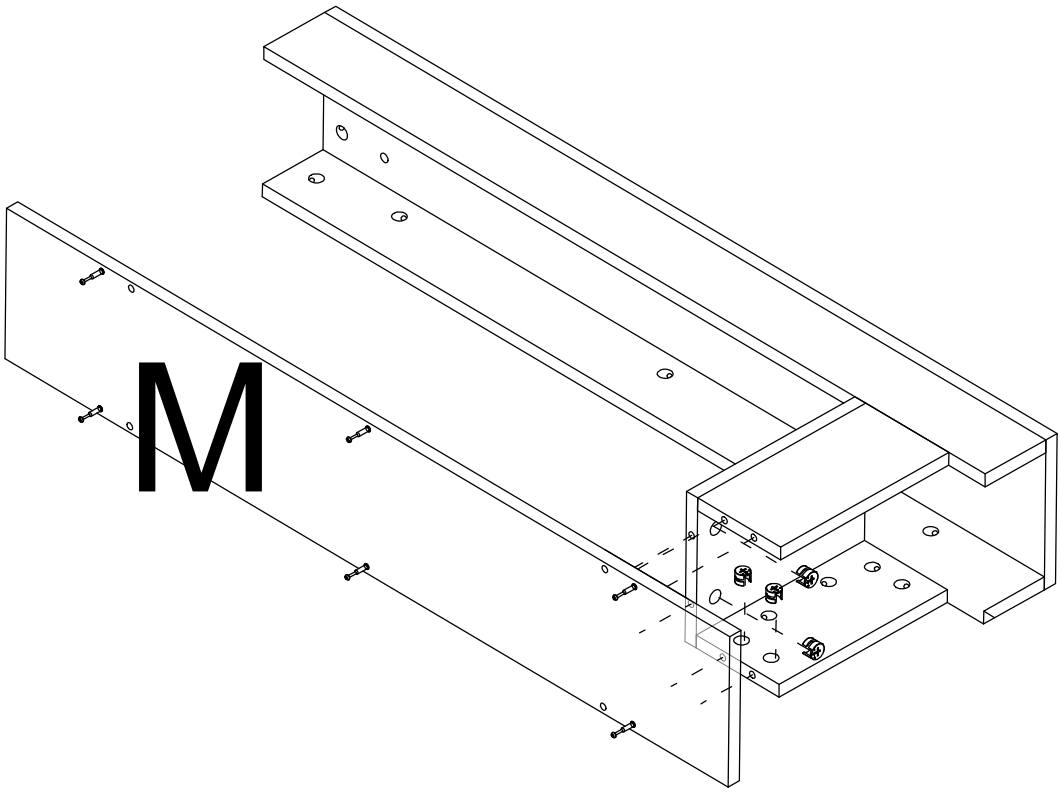


Step 15


2 x 2

3 x4

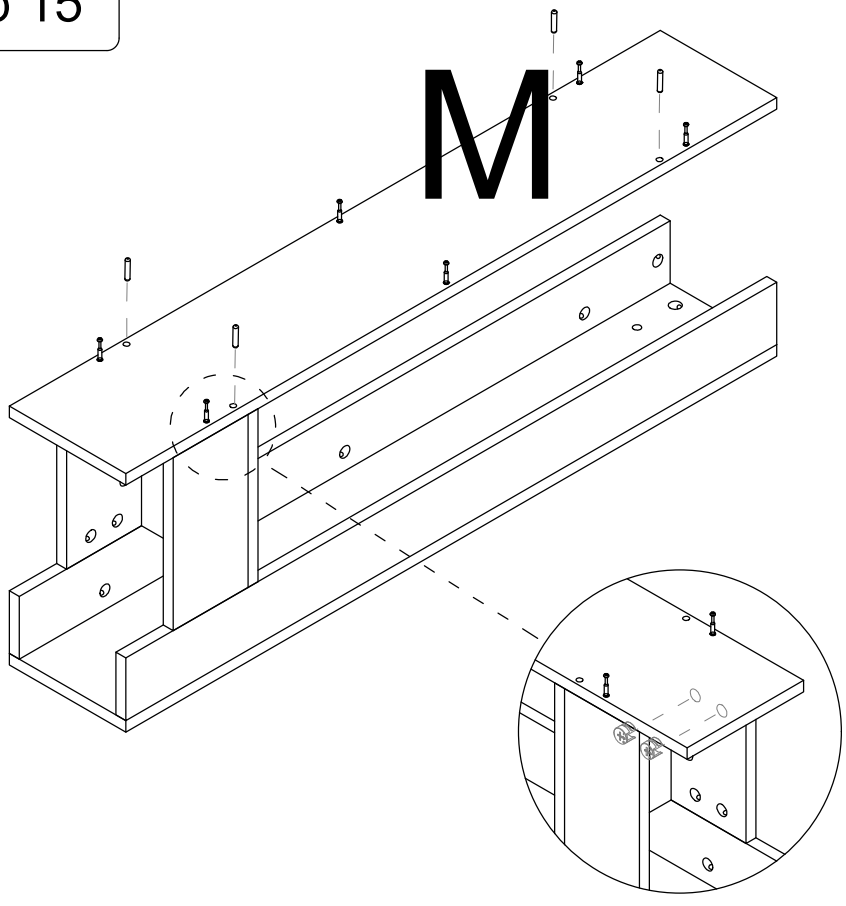

Step 16

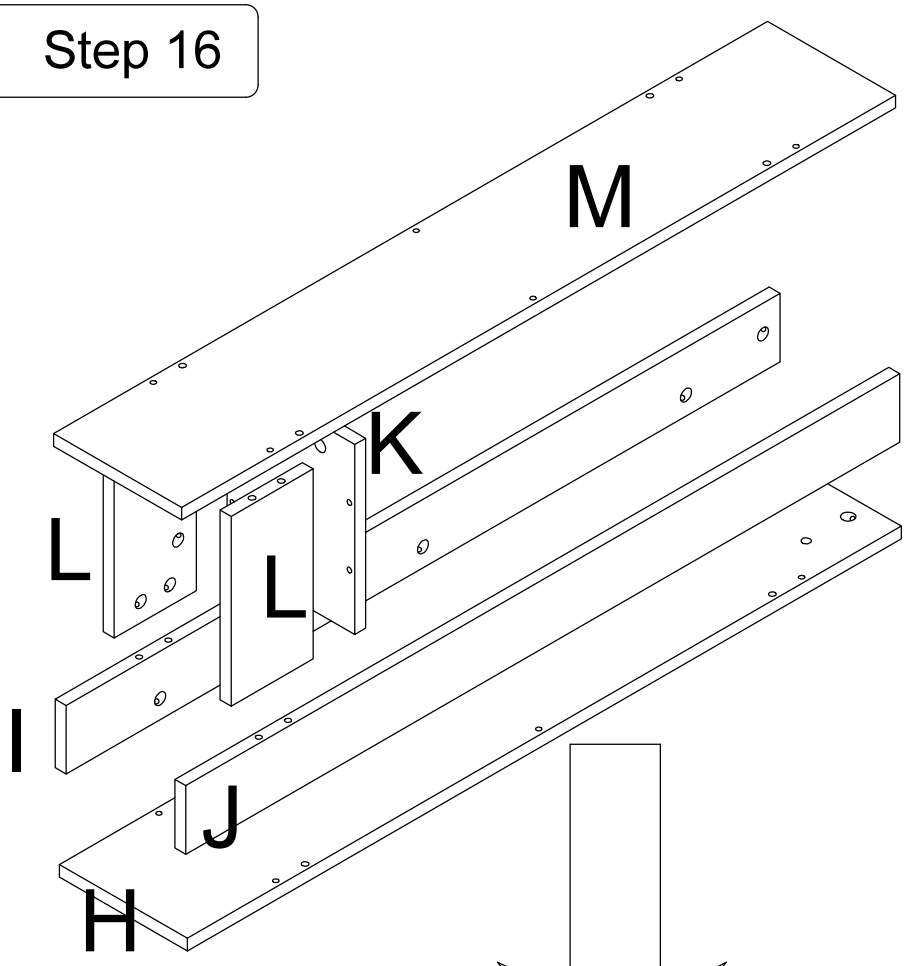

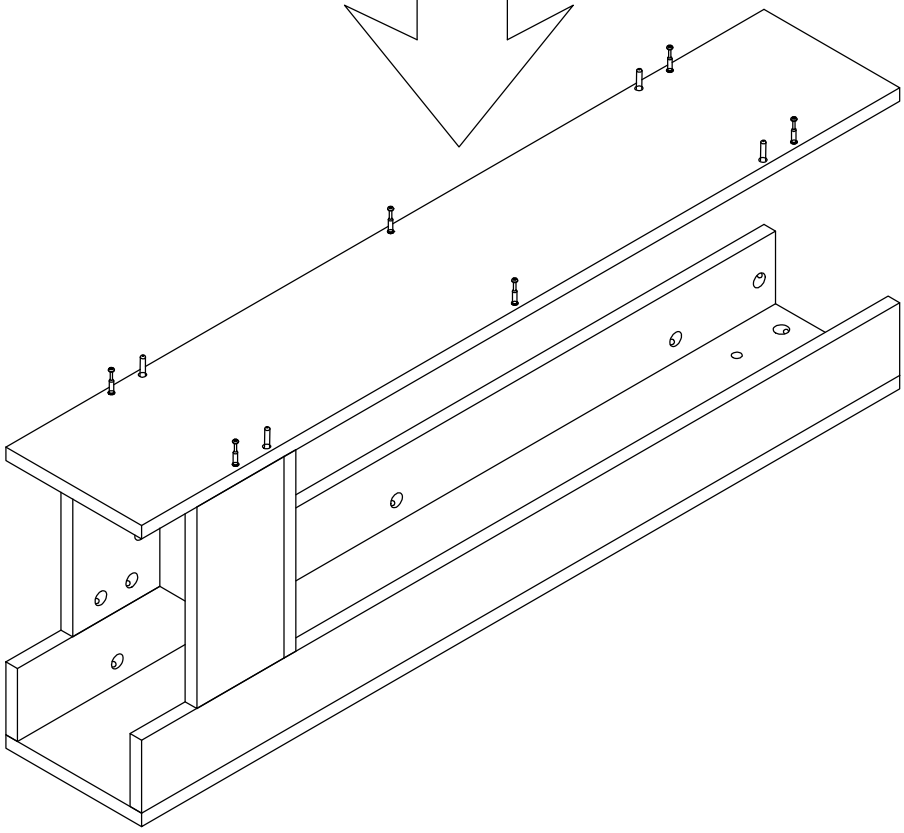


1	x22
2	x 22
3	x8

Repeat the same installation steps to assemble another identical component.

Step 17


2

x 6

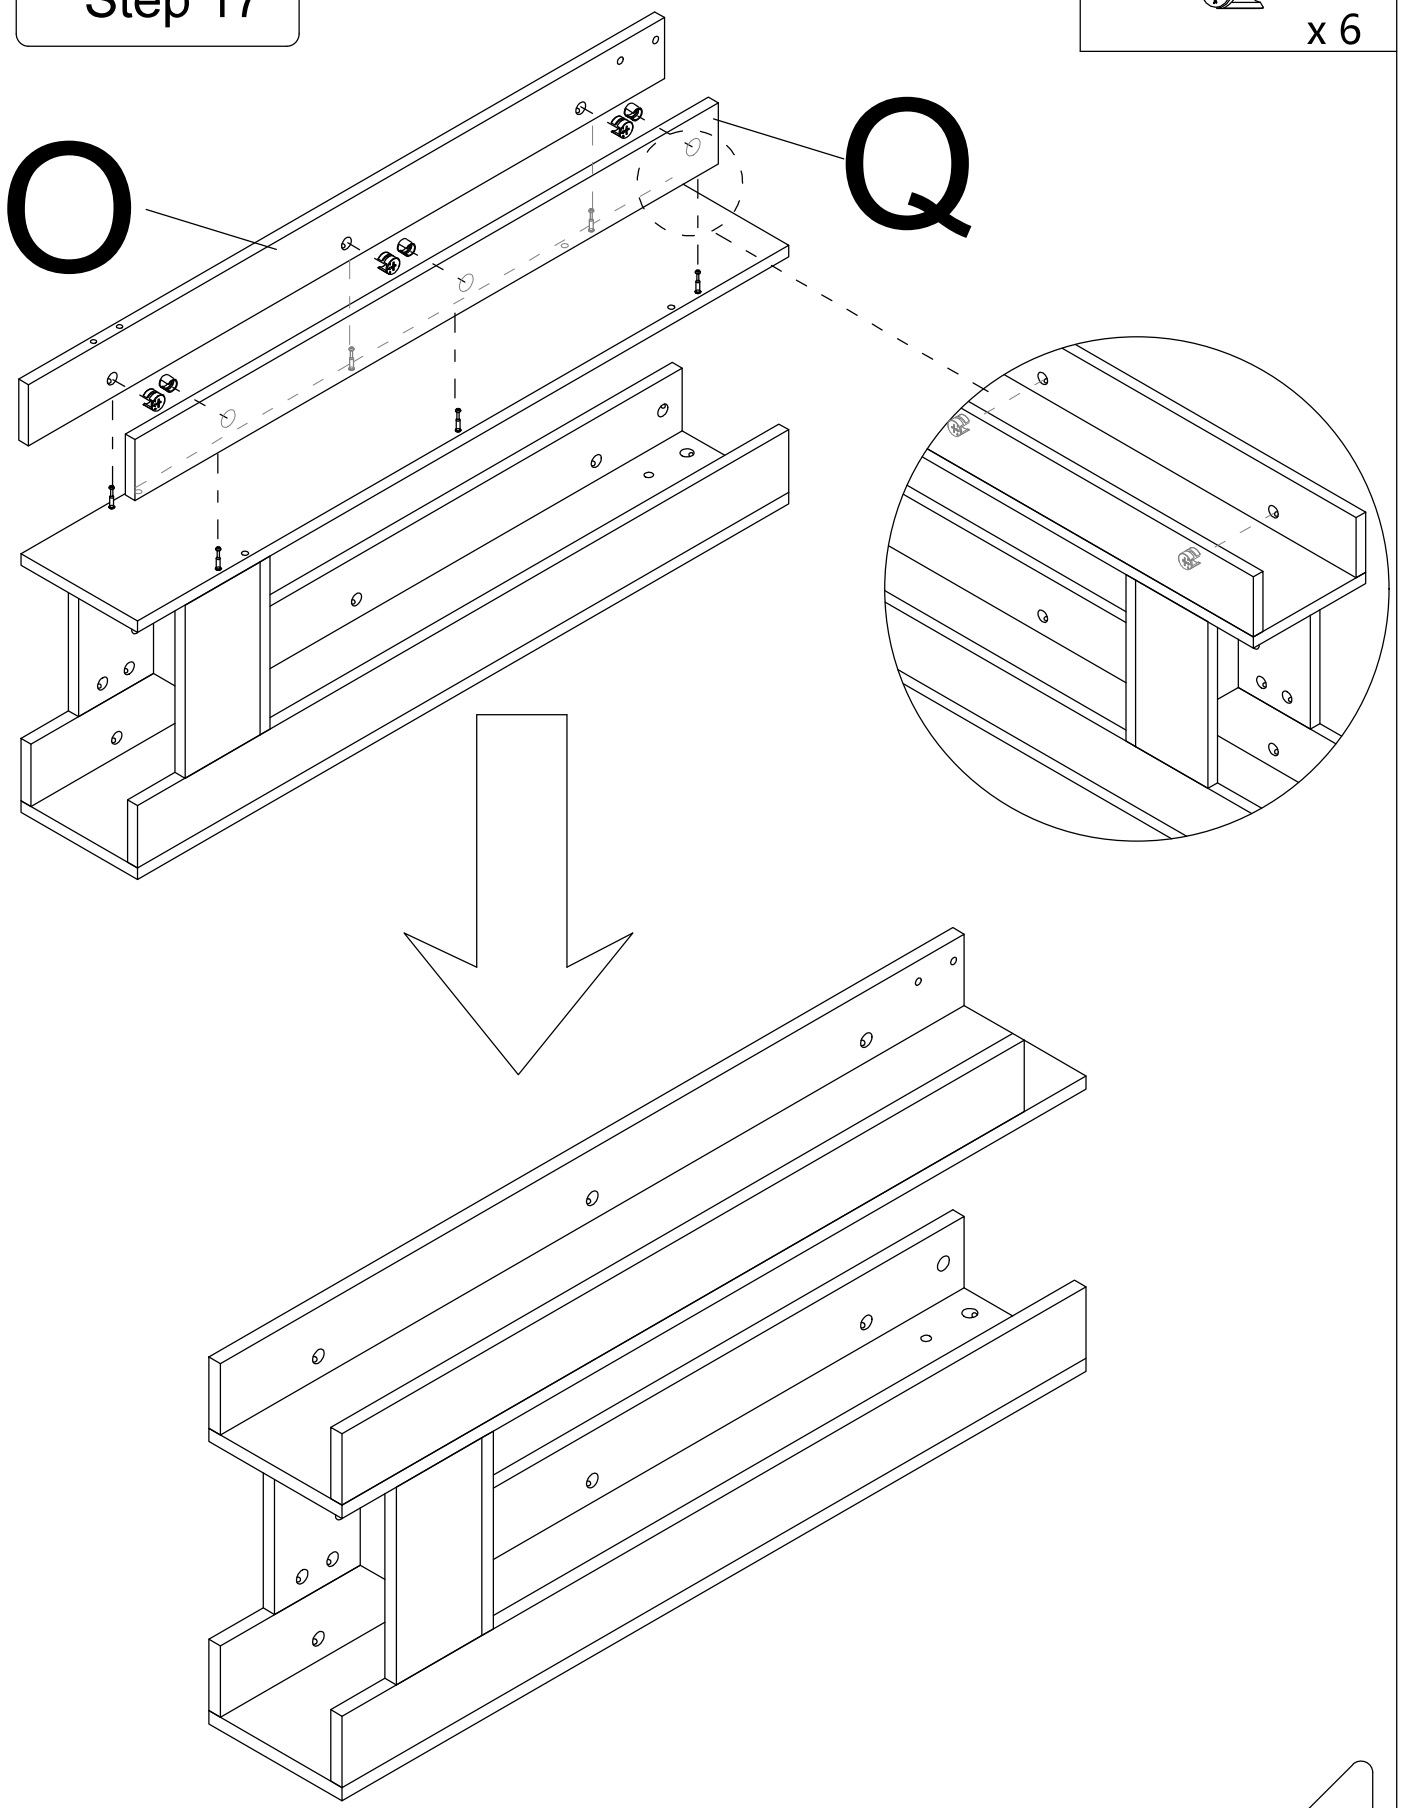



Finished Assembly Diagram

Step 18

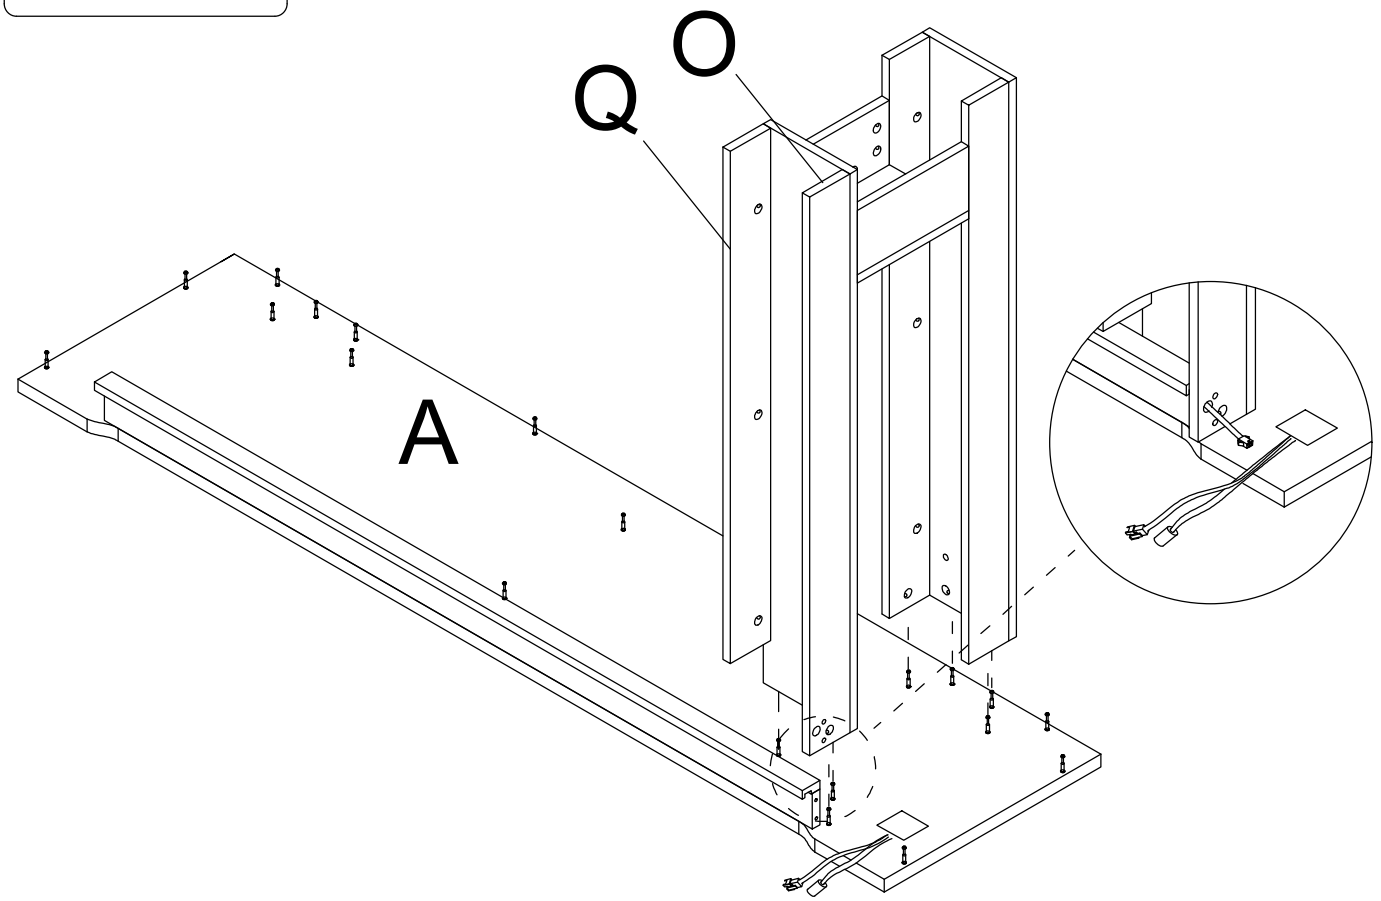

Step 19

2		x 7
5		x2

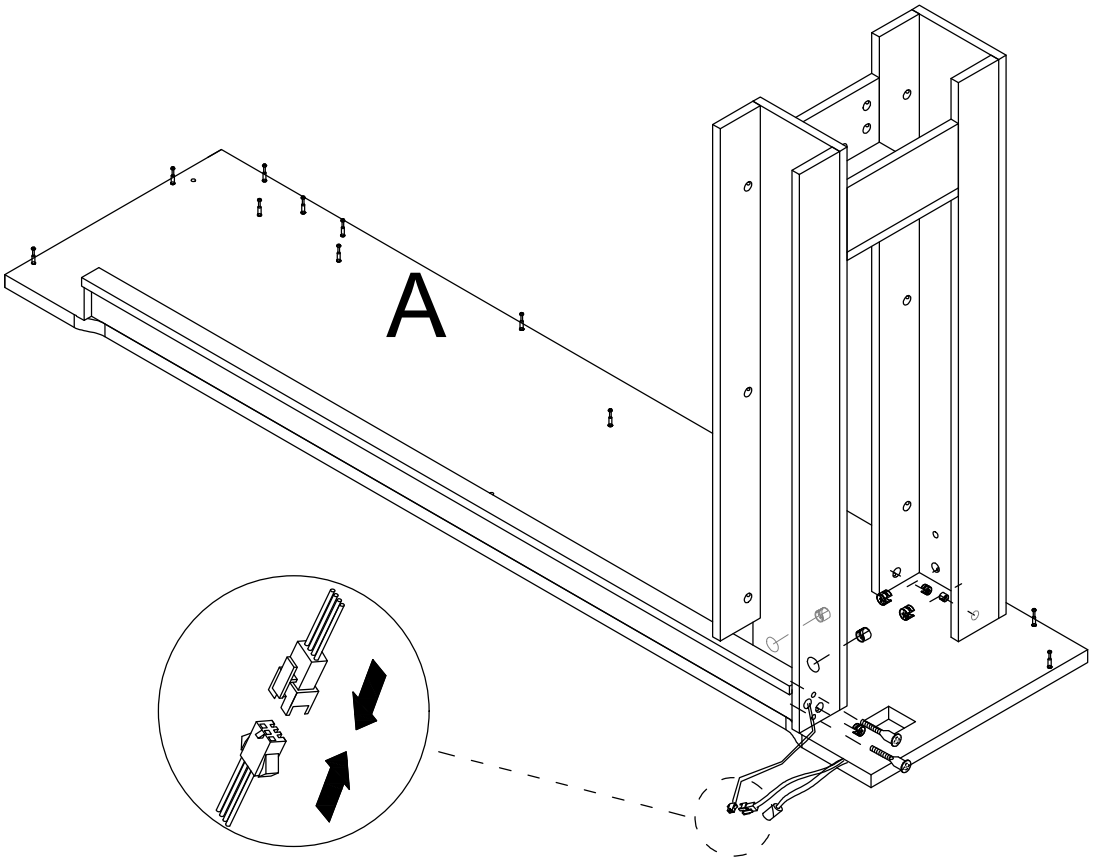


Step 20

2

x 6


P

N

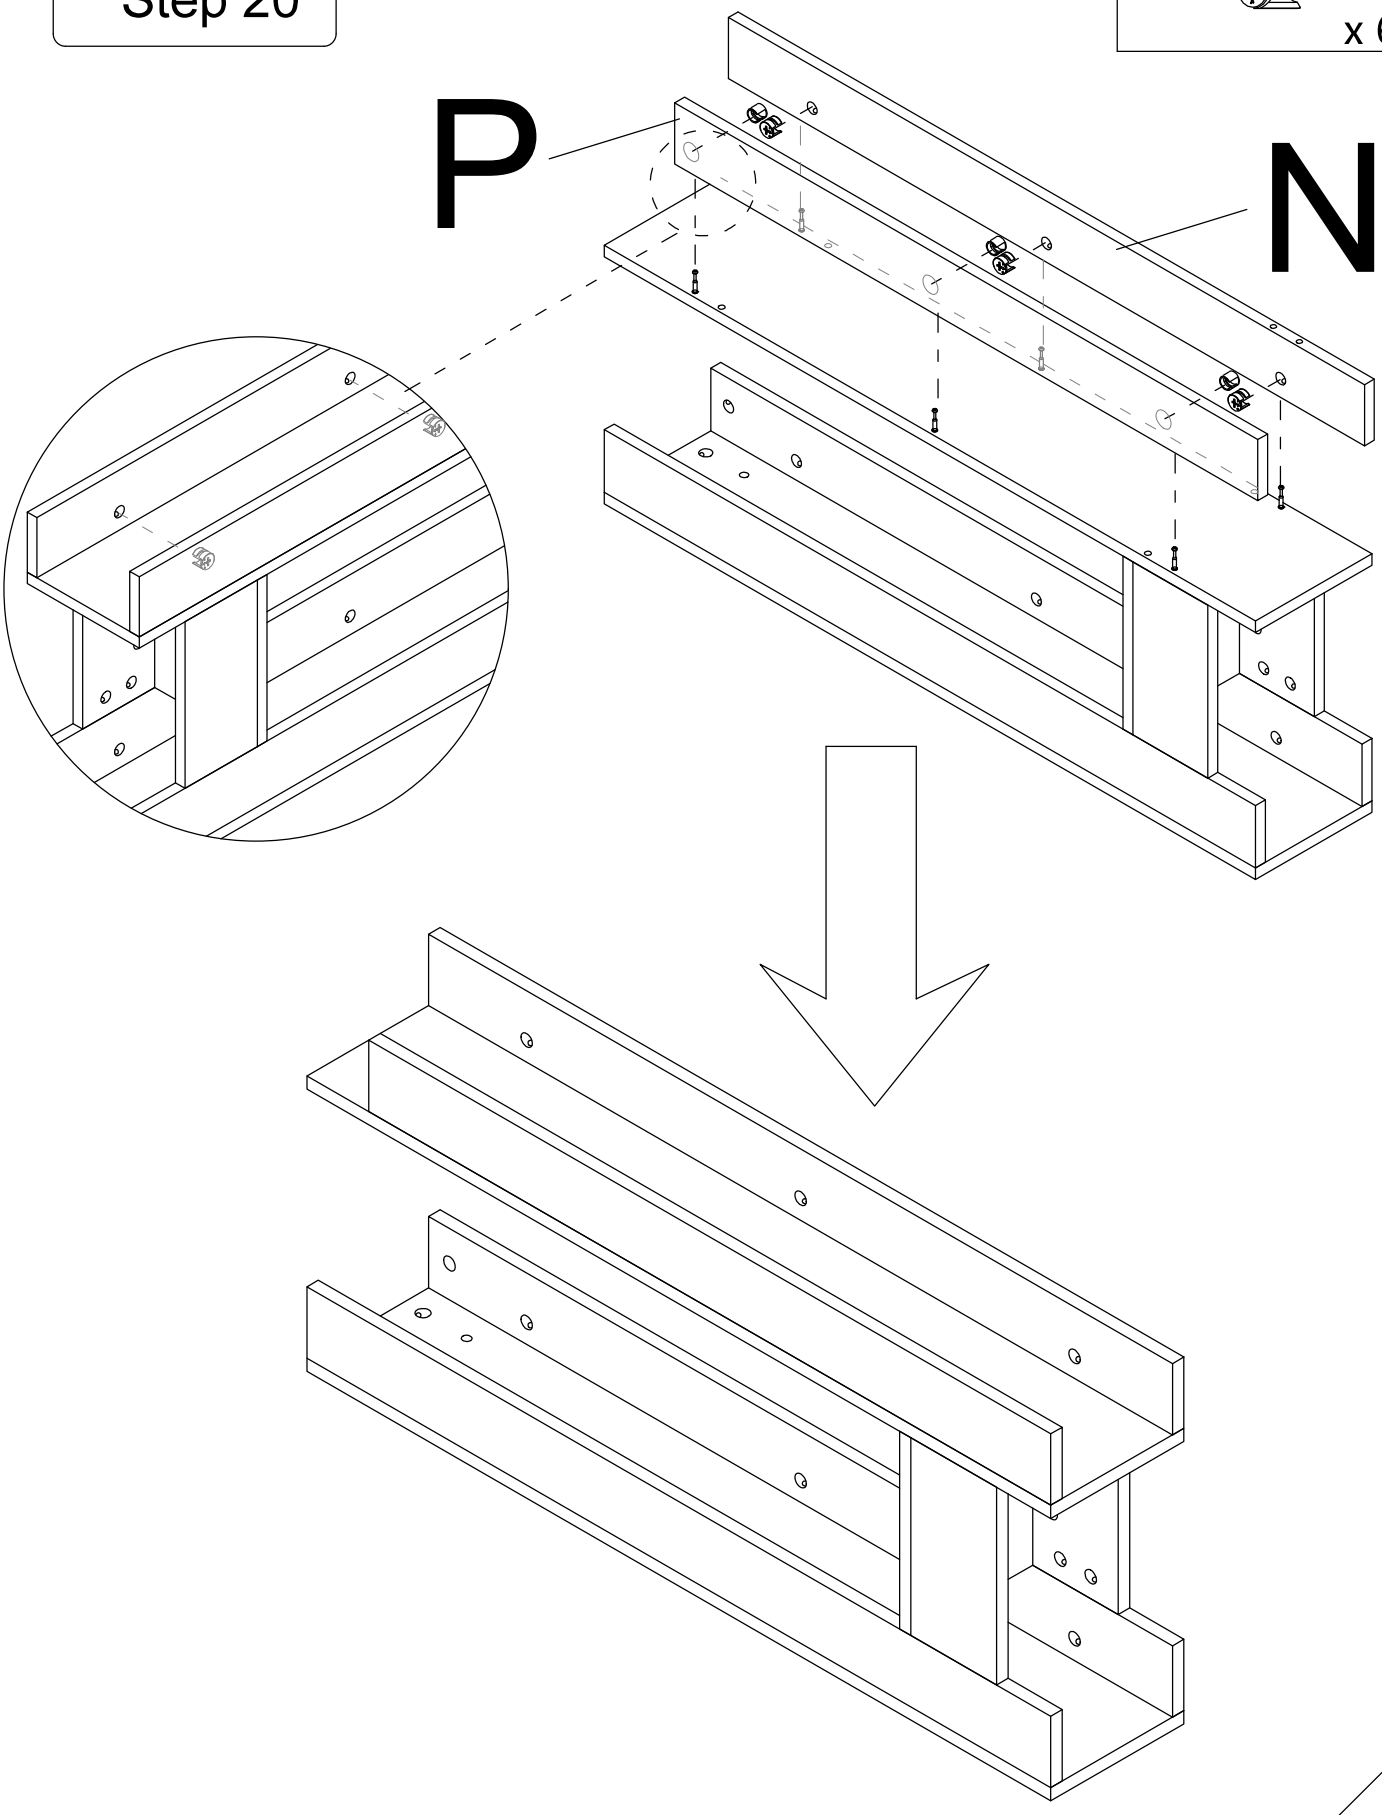



Finished Assembly Diagram

Step 21

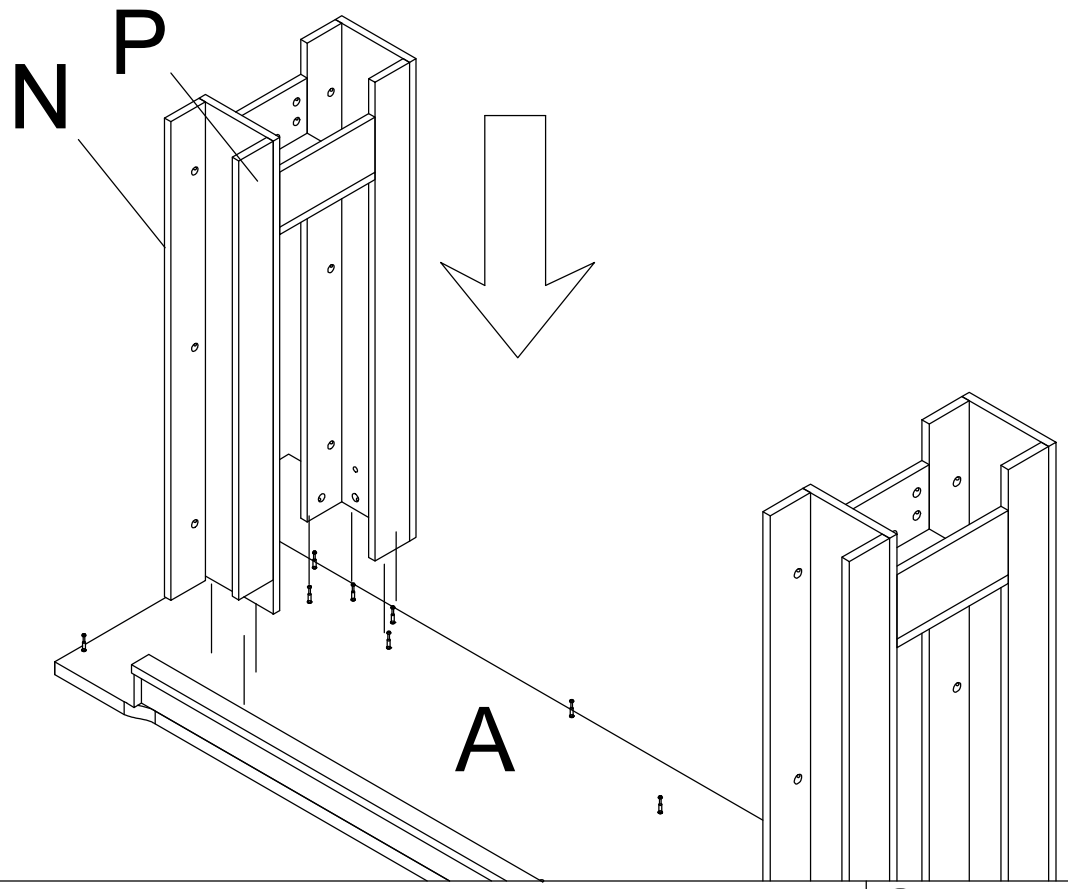



Step 22

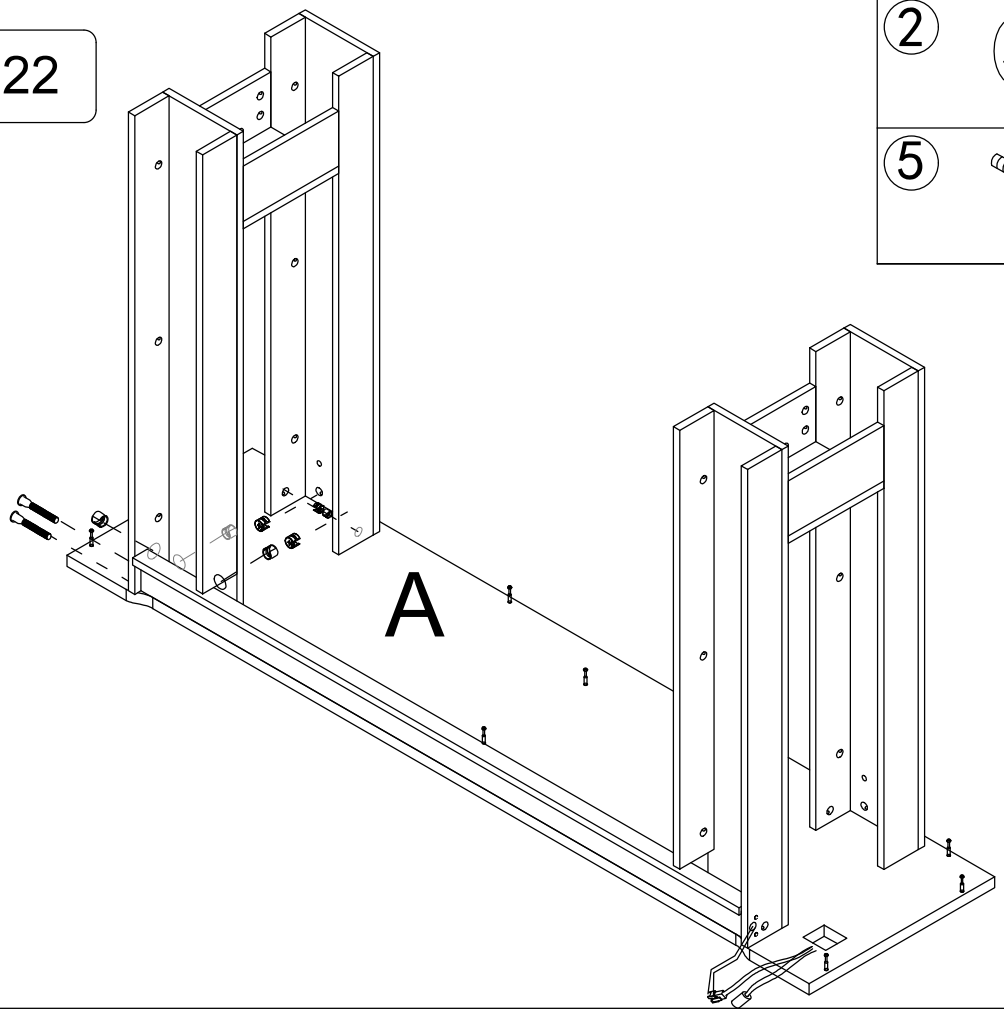


2		x 7
5		x2


Step 23



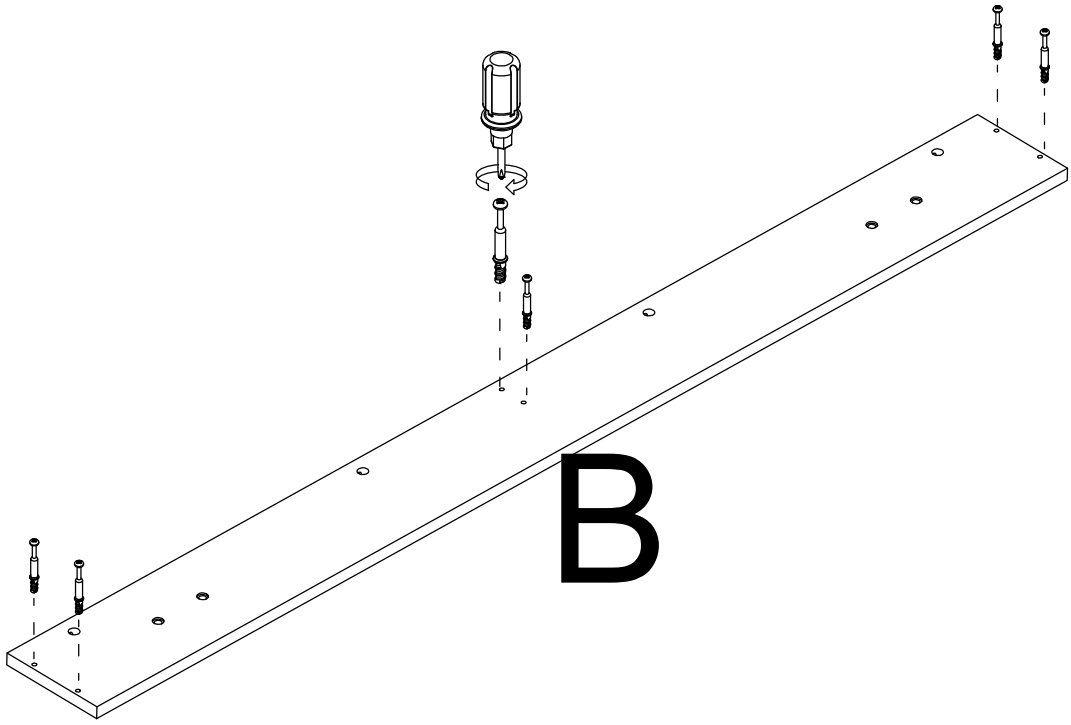


Step 24



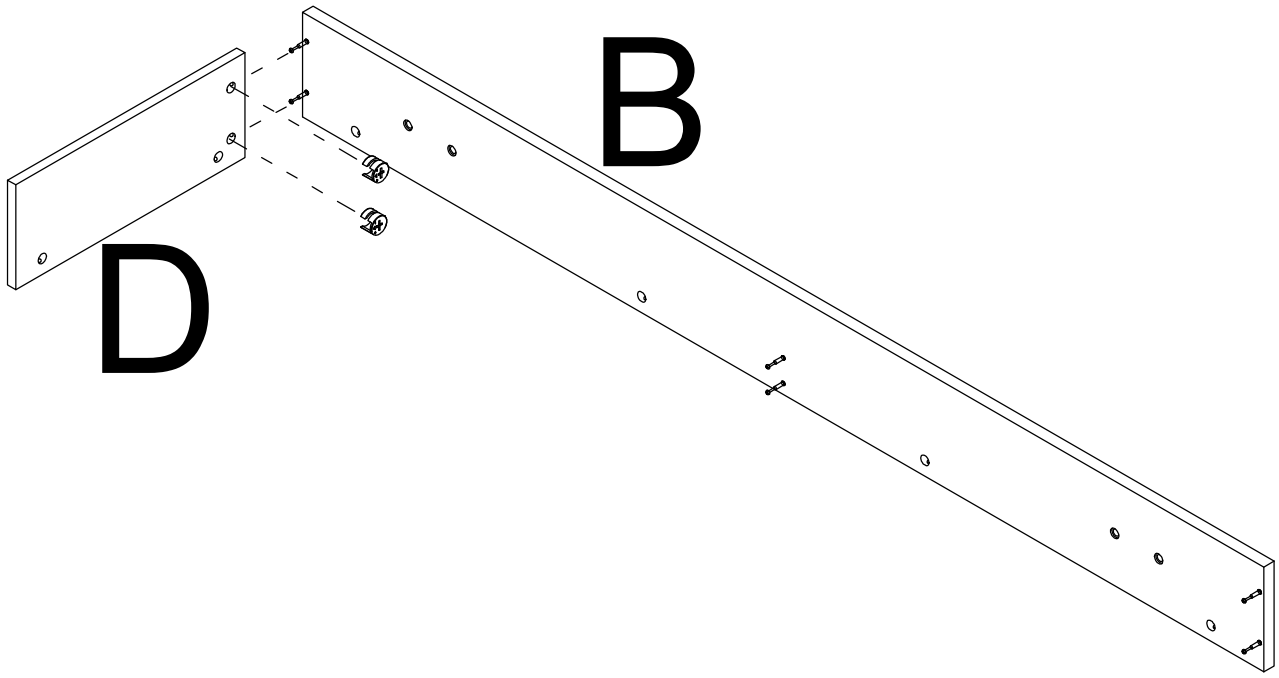


Step 25

2 x 2

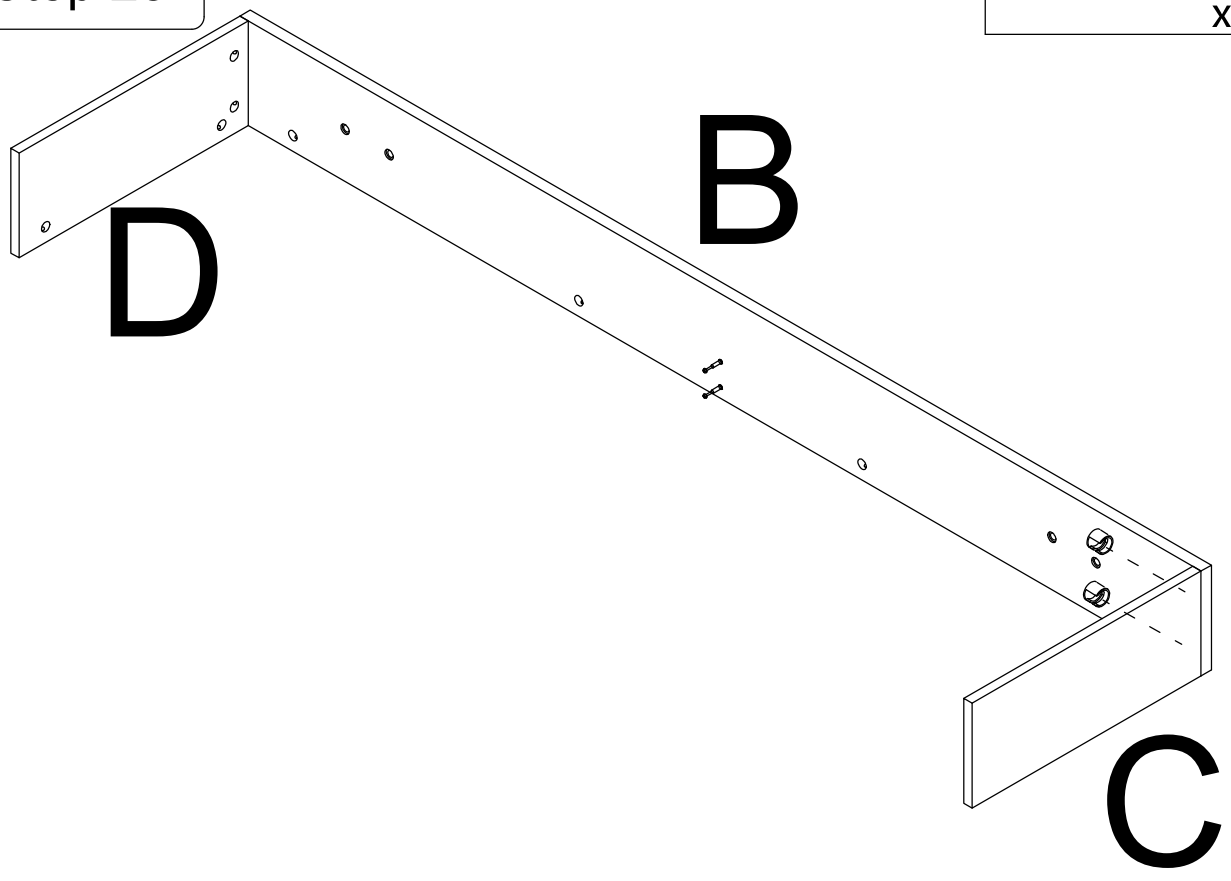



Step 26

2 x 2

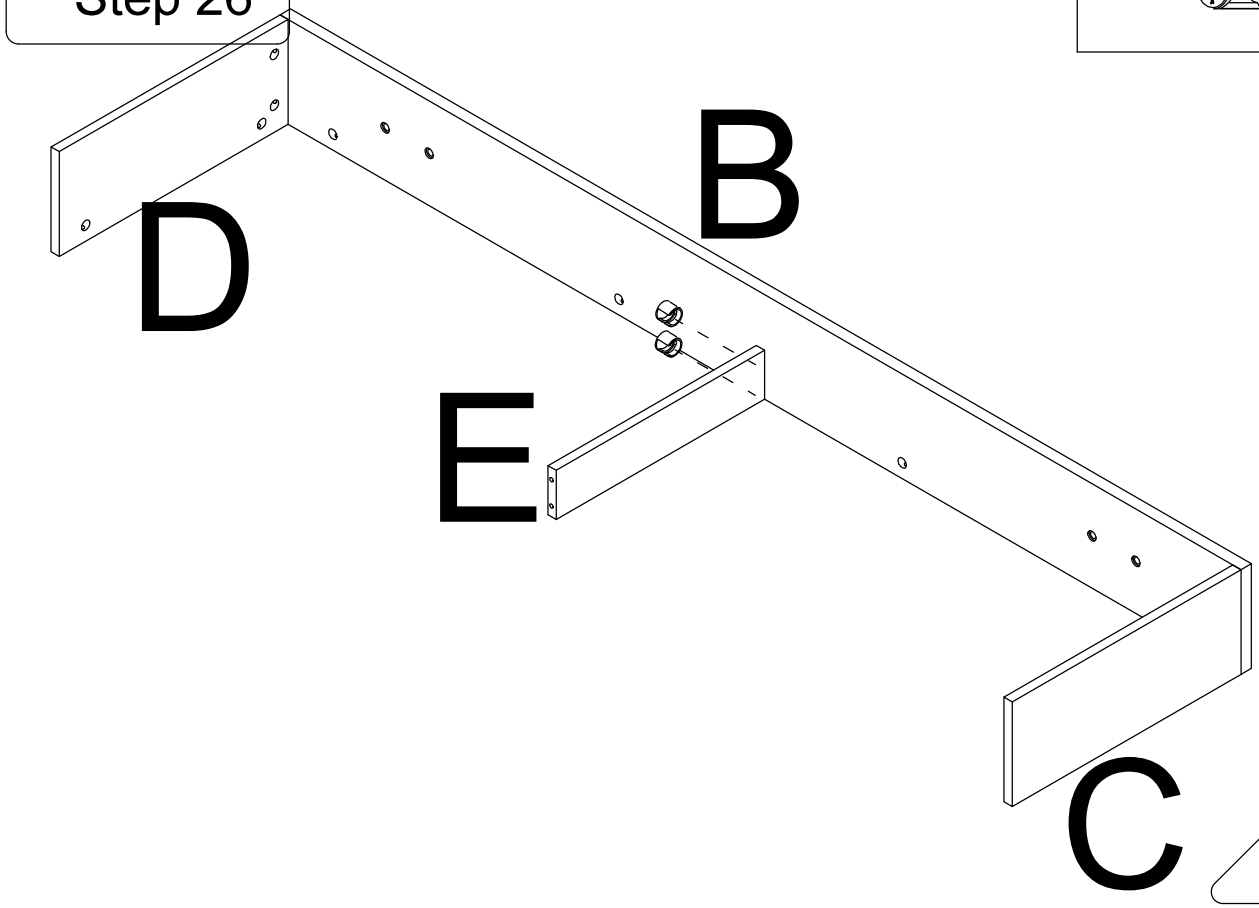

Step 27

2		x10
5		x1

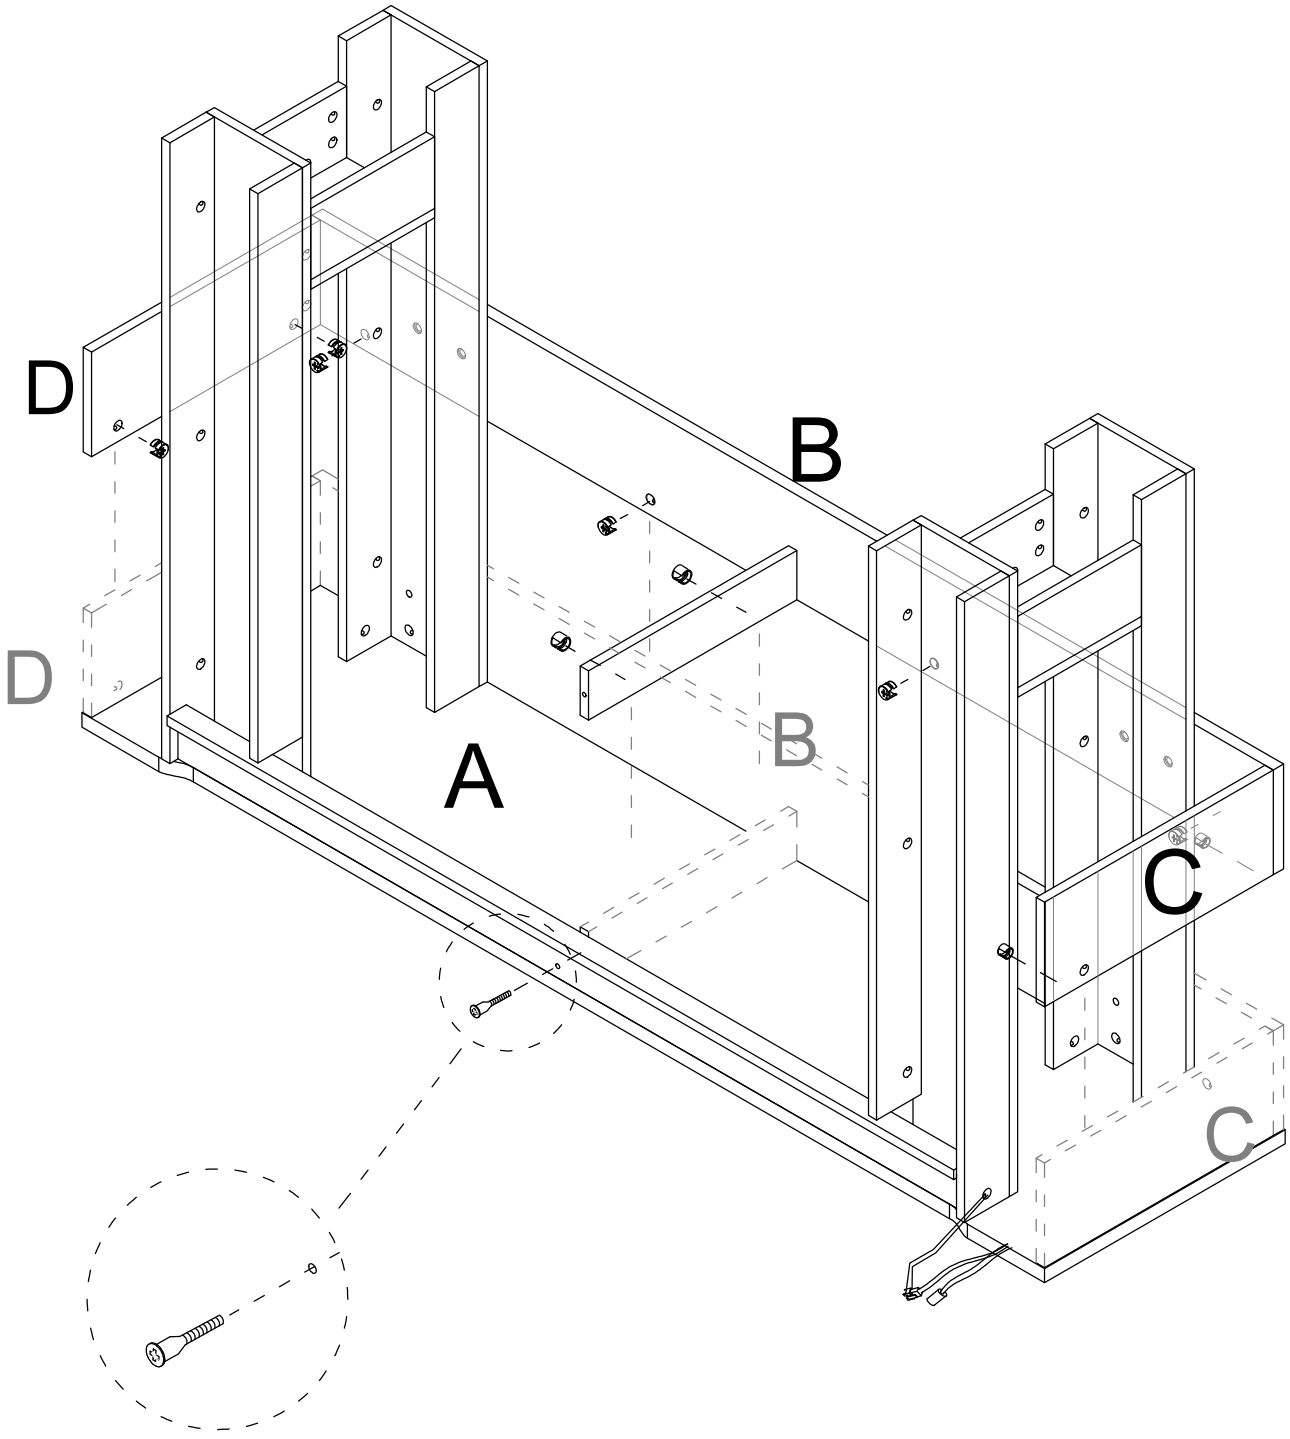


Step 28


6




x4

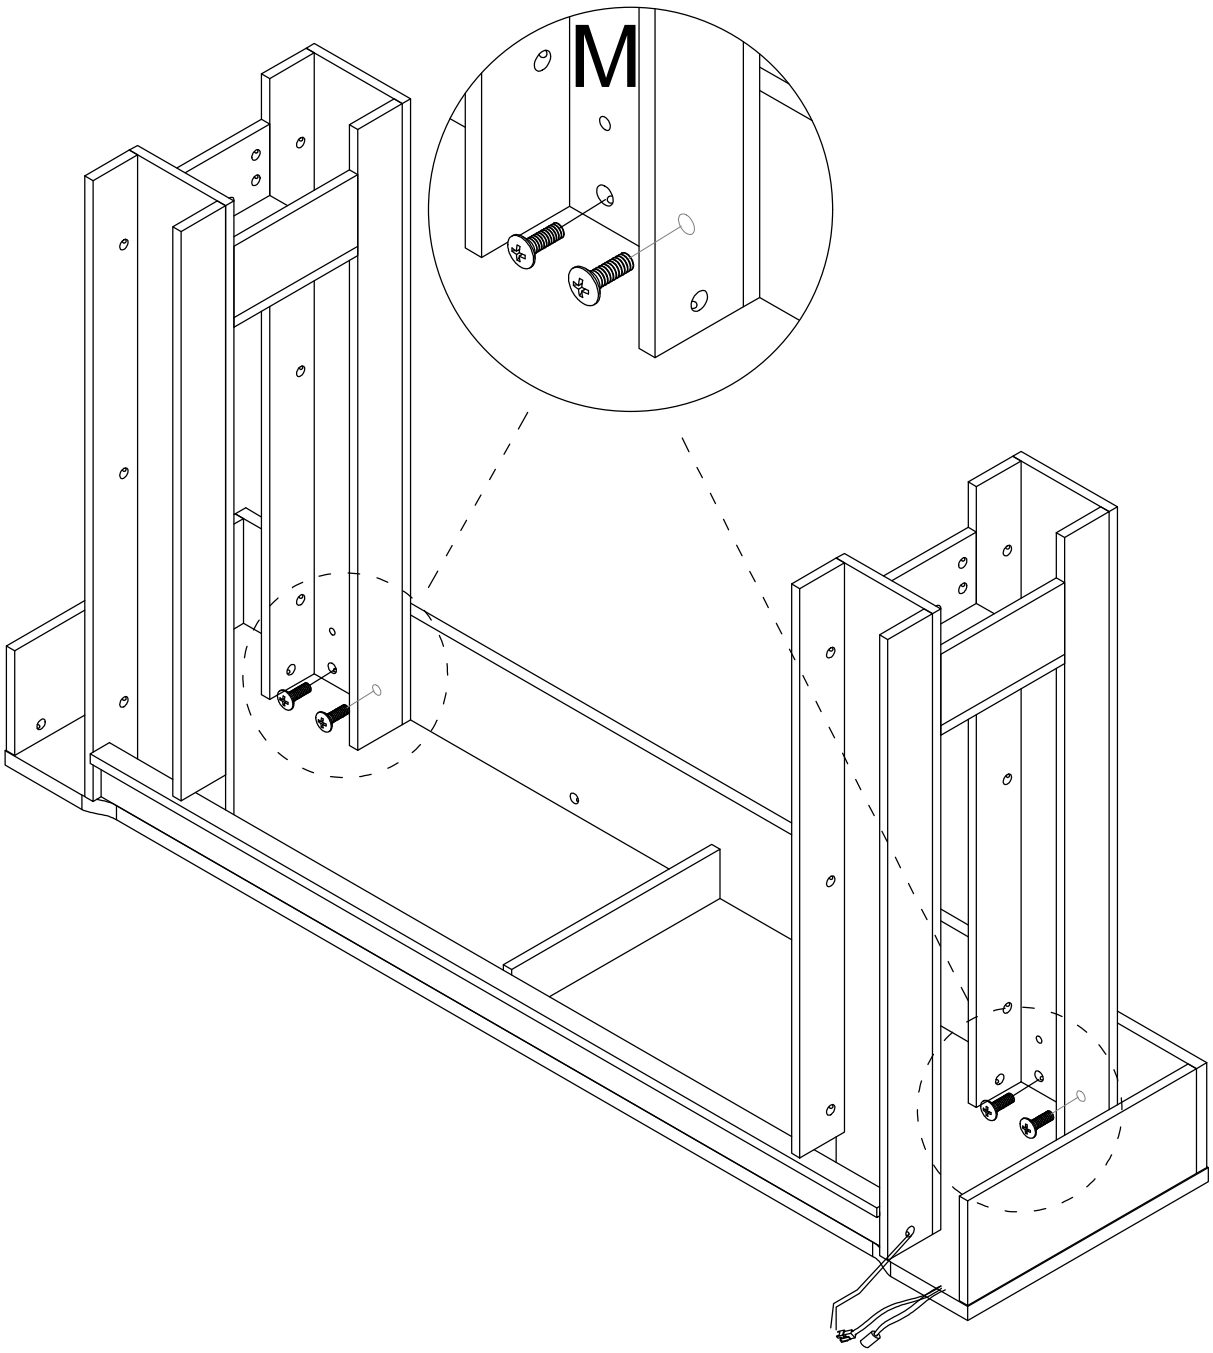


Step 29




Tear off release paper and stick
the black foot pad on the board

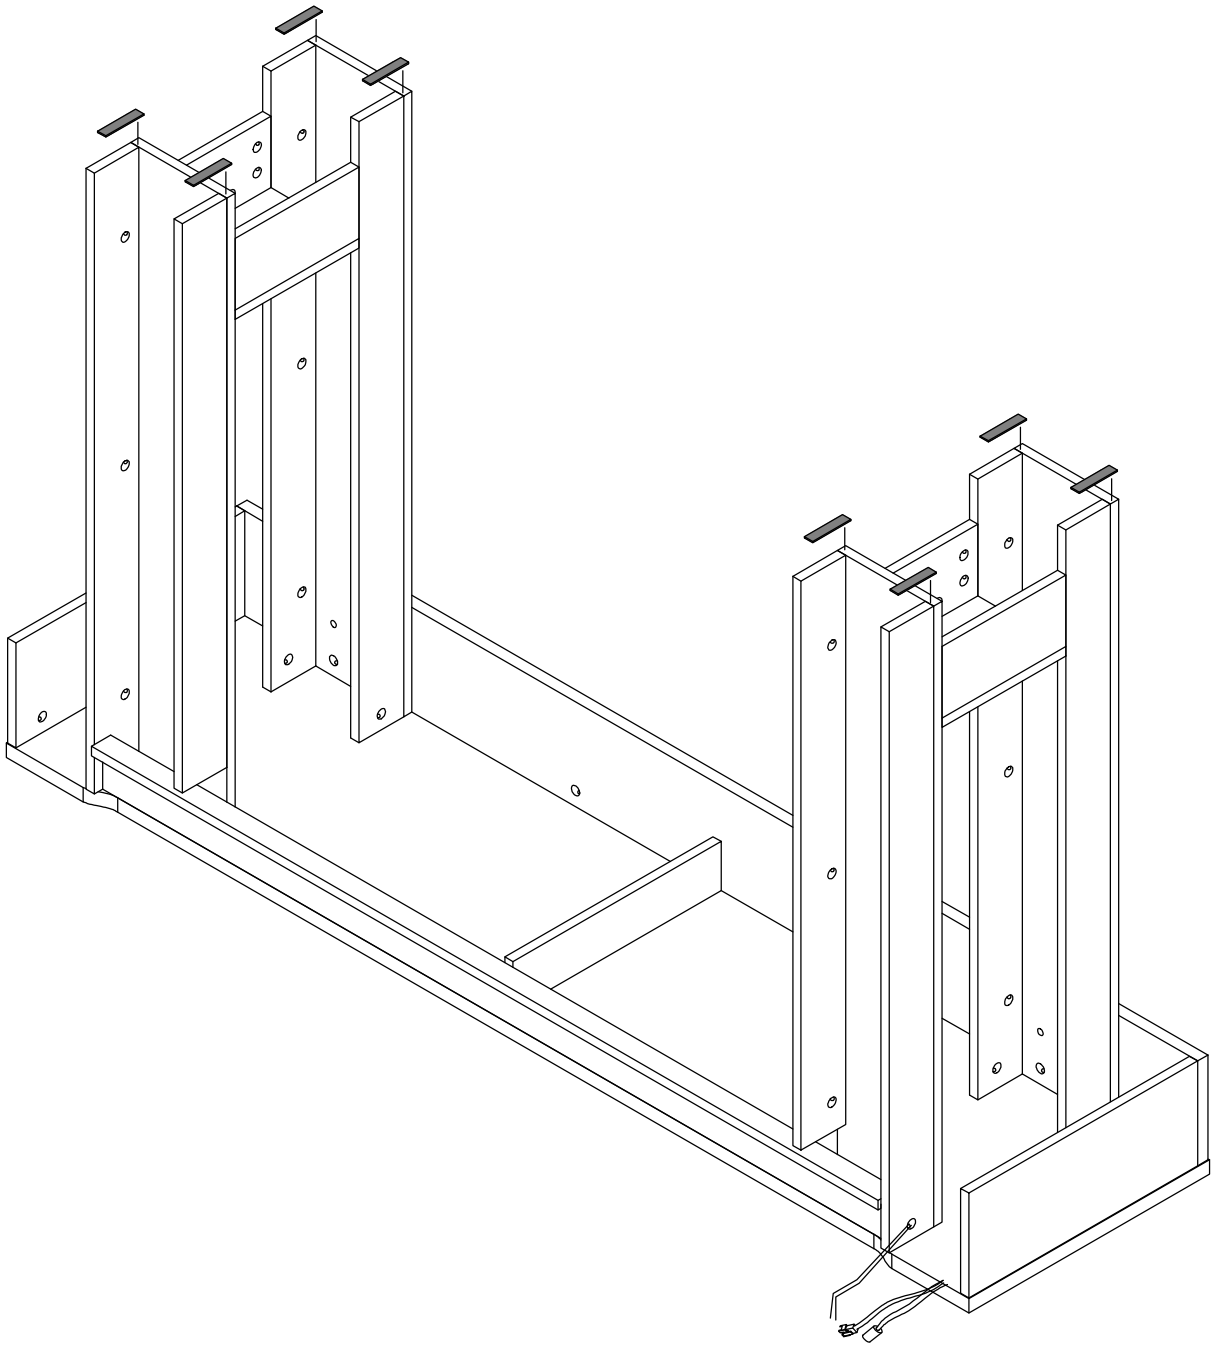


Step 30

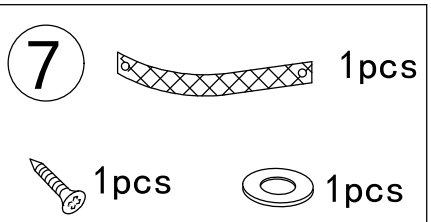


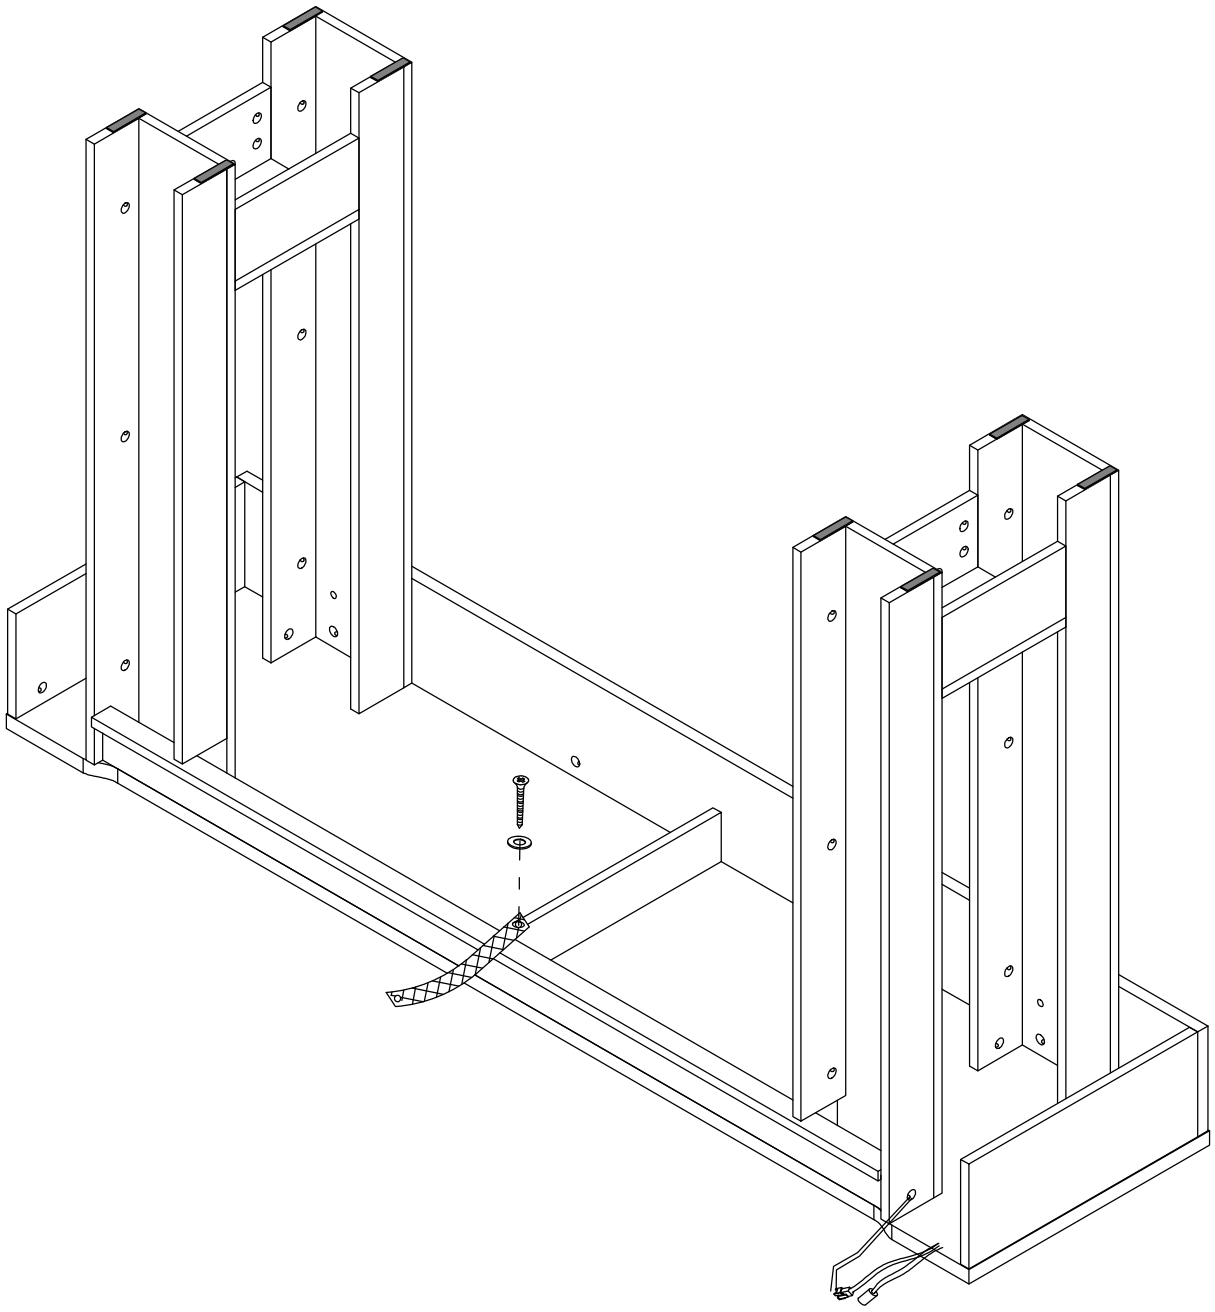

Step 31

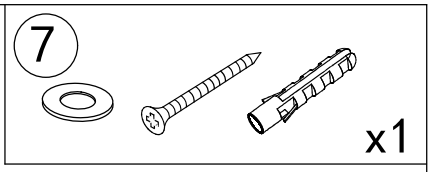


use a ruler to measure theapproximate height of the producton the wall, and then mark it witha pencil.

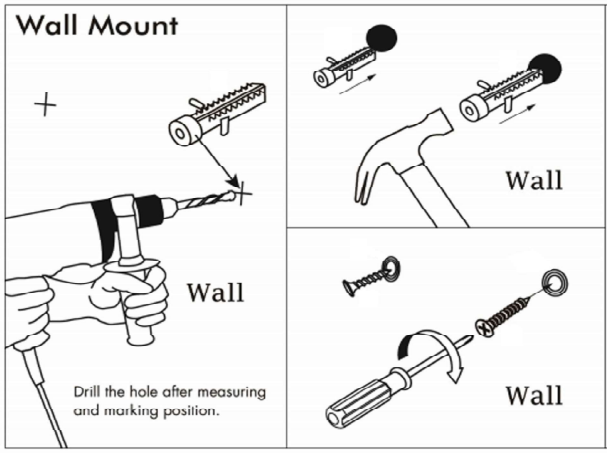


Put the expansion bolt into the hole.

Pass the matching screws throughthe "anti-rewind" and tighten themto fix them on the wall.


Use a tape drill to make holesin the wall that are suitable for theproduct screws.

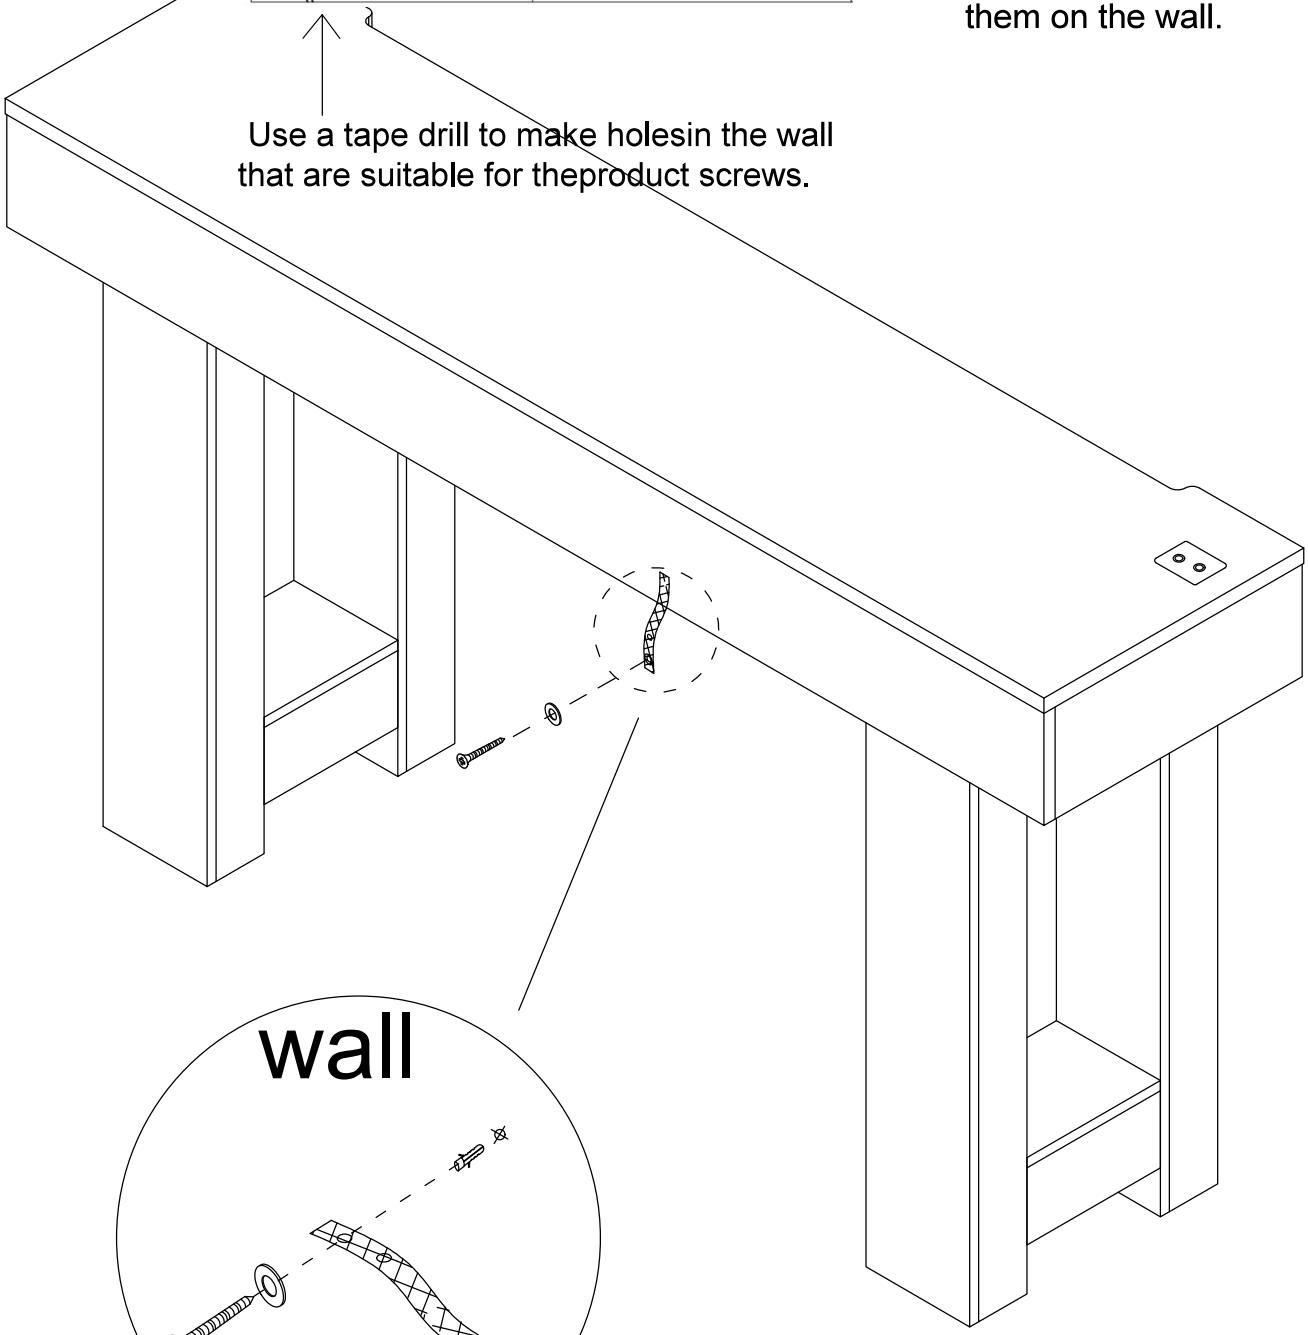

Step 32



x1

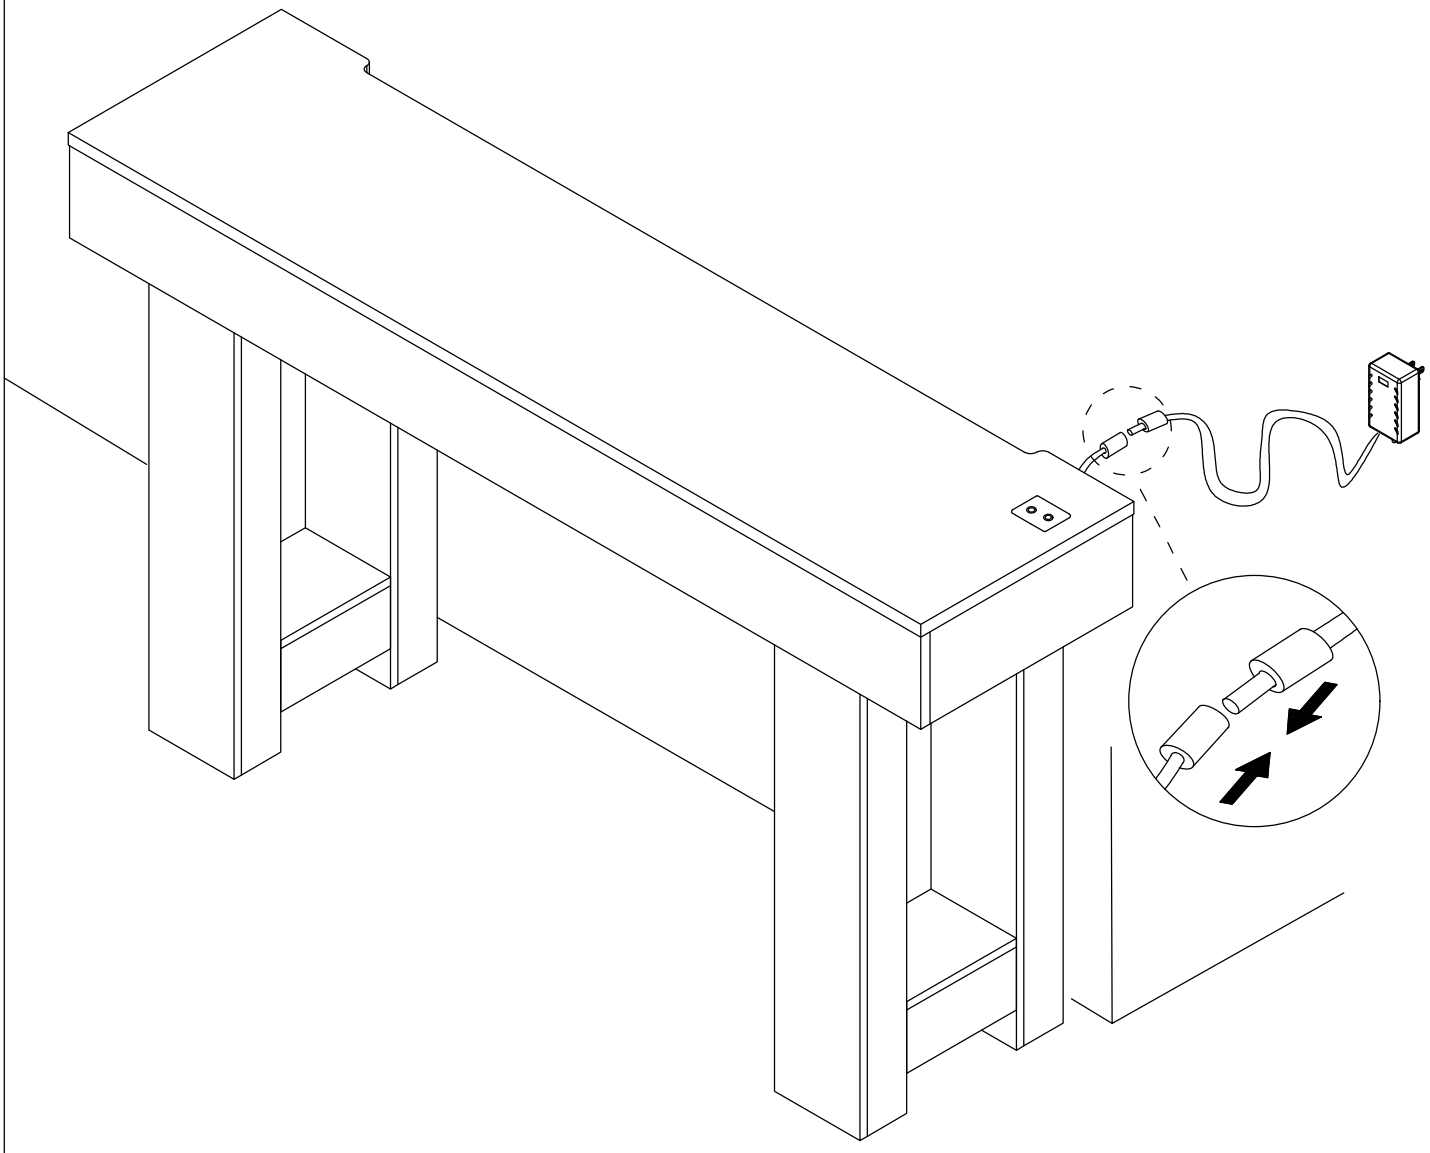


User's Guide

Thank you for purchasing this product. To use this product, please plug it into a 12V DC power supply. Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller with 2 touch buttons. It can turn ON/OFF the light, change light colors, and adjust the light luminance.

Product Show

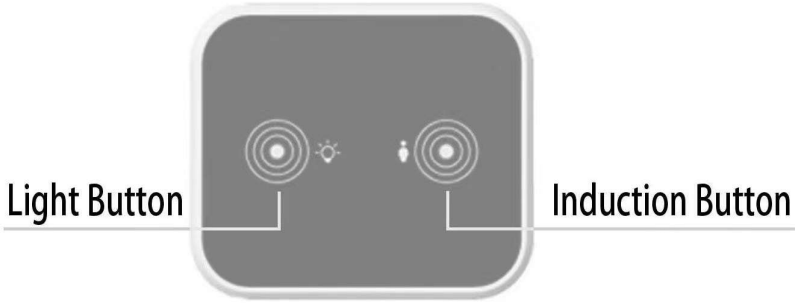

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.

Operation



This touch button is used to turn on/off, change colors, and adjust brightness.

A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off. B. Long touch -> adjust the luminance



This touch button is used to turn on/off the induction function.

A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.

B. Long touch to turn off the induction function.

C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.