





USE AND CARE MANUAL

Model number: 8282WL-02

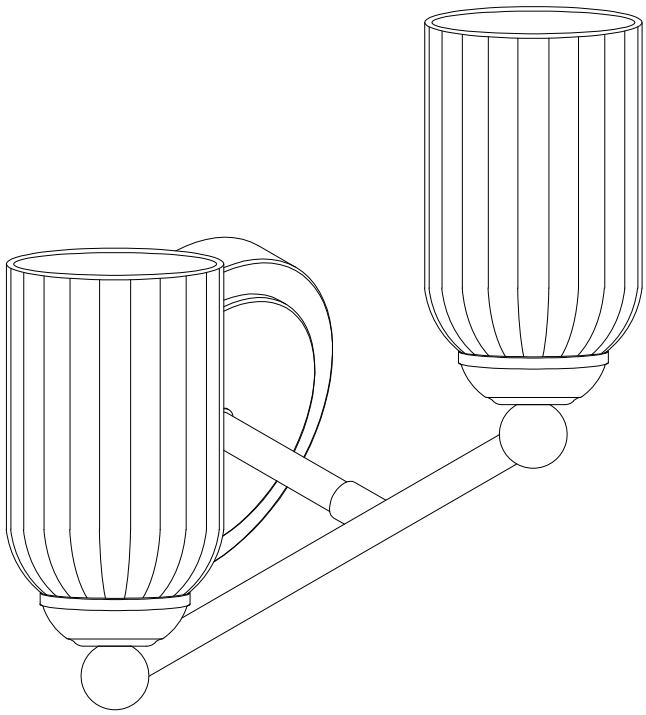

Hardware (Parts are not to scale)

H1 Mounting bracket (Pre-assembled to fixture body) 1 pc 	H2 Outlet box screw (short) 2 pcs 	H3 Green ground screw (Pre-assembled to mounting bracket) 1 pc 
H4 Wire connector 3 pcs 	H5 Flat-head fixture screw 2 pcs 	H6 Socket ring (Pre-assembled to socket of fixture body) 2 pcs 

THIS MANUAL CONTAINS IMPORTANT SAFETY INFORMATION. PLEASE READ AND KEEP FOR FUTURE REFERENCE.

IMPORTANT SAFETY INFORMATION

• Read and understand this manual before assembling, installing, or using the fixture.
• Turn OFF power at the circuit breaker or fuse box before installation. Verify that power is off before touching any wires.
• Do not damage or cut wire insulation during installation. Keep wires away from sharp edges.
• All electrical connections must comply with local codes and the National Electrical Code (NEC). If you are not experienced with electrical wiring, have the fixture installed by a qualified licensed electrician.
• Risk of fire: Most dwellings built before 1985 have supply wire rated for 140°F (60°C). Consult a qualified electrician before installation.
• Do not exceed the maximum wattage marked on the socket or re-lamping label.
• Before replacing a bulb, turn off power and allow the bulb to cool completely.
• Do not immerse the fixture in water. Keep combustible materials away from lighted bulbs.


PREPARATION

• Before installation, verify that all parts are present and undamaged. Compare the contents with the hardware list on the previous page. If any part is missing or damaged, do not install the fixture; contact customer service for replacement parts.
• Tools required (not included): flat-blade screwdriver, Phillips-head screwdriver, pliers, electrical tape, wire cutters, safety glasses, ladder, and wire stripper.

INSTALLATION


1 Preparing the mounting bracket

• Remove the two flat-head fixture screws (H5) that secure the mounting bracket (H1) to the fixture body (A). Set the screws aside for Step 4.

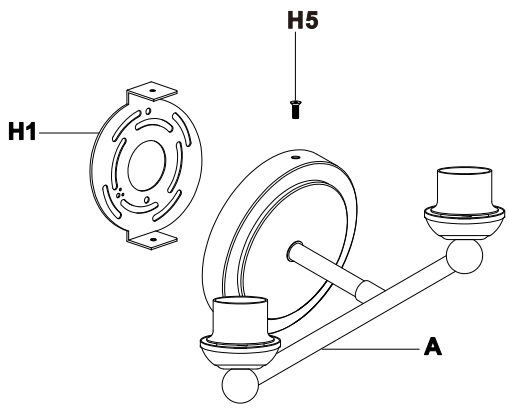

2 Installing the mounting bracket


• Attach the mounting bracket (H1) to the outlet box using the two outlet box screws (H2). Tighten securely.

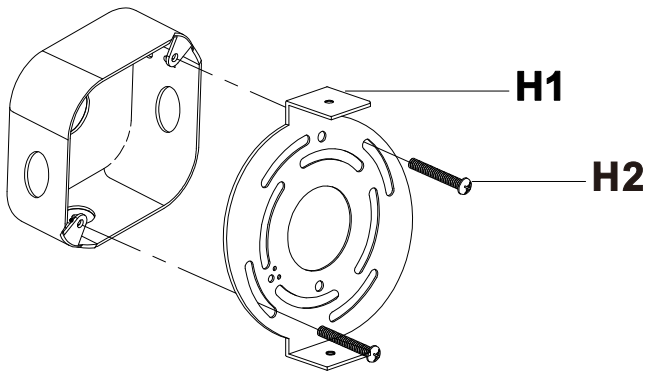

INSTALLATION (continued)


3 Making the electrical connections


• Strip approximately 3/4 in. of insulation from the wire ends, if needed.
• Connect the black fixture wire to the black (hot) supply wire. Connect the white fixture wire to the white (neutral) supply wire.
• Connect the fixture grounding wire to the supply grounding conductor (bare copper or green). Loop the fixture ground once under the green ground screw (H3) on the mounting bracket (H1), then connect it to the supply ground.
• Secure each connection with an approved wire connector (H4). Make sure no bare wire is exposed outside the connector, then carefully tuck all wires into the outlet box.

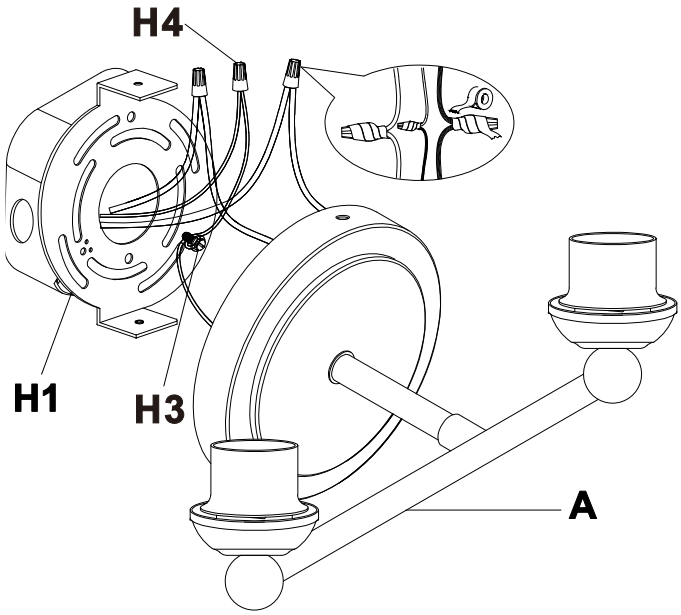


4 Installing the fixture body to the outlet box

• Place the fixture body (A) over the outlet box and align the mounting holes in the backplate with the threaded holes in the mounting bracket (H1).
• Reinstall the two flat-head fixture screws (H5) and tighten until the fixture body is held firmly and sits flush against the wall. Do not overtighten.
Note: The fixture may be installed with the shades facing up or facing down.

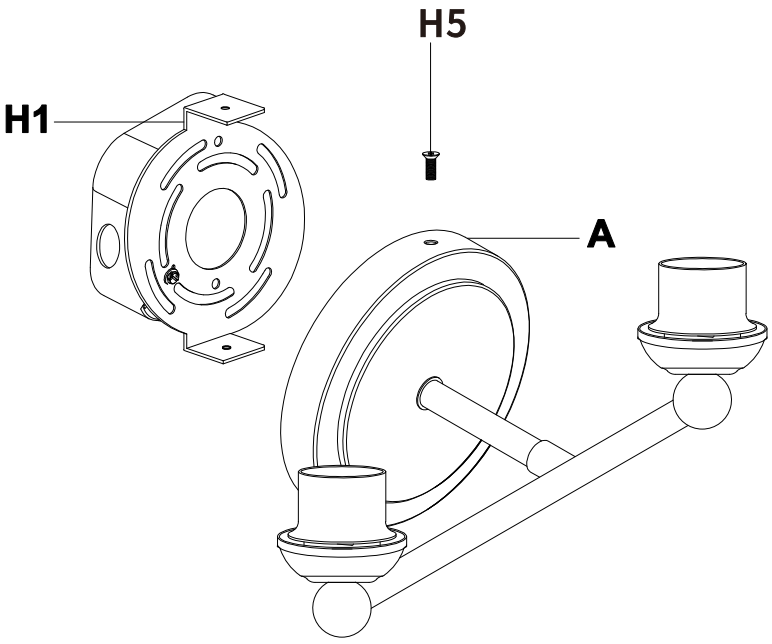

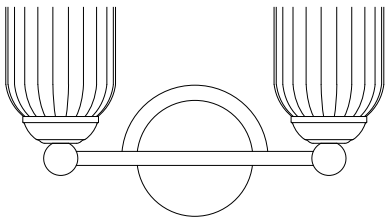

OPTION 1

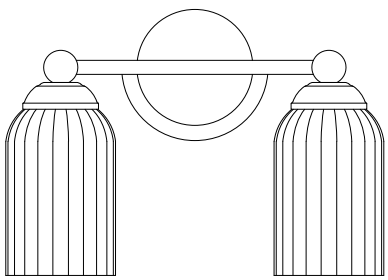


OPTION 2

INSTALLATION (continued)


5 Assembling the glass shades

• Unscrew the socket rings (H6) from the sockets on the fixture body (A). Place each glass shade (B) over a socket, then reinstall and hand-tighten the socket ring (H6) to secure the shade. Do not overtighten.

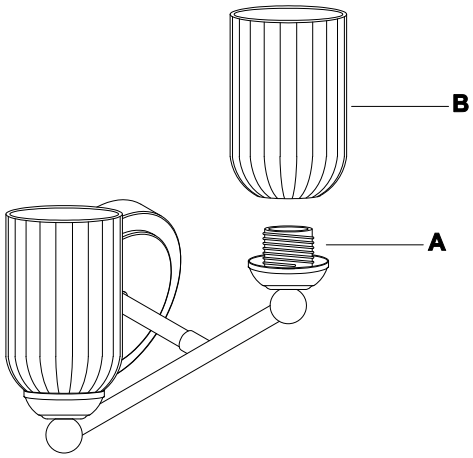

6 Installing the light bulbs

• Install two light bulbs (not included). Use medium-base (E26) bulbs, maximum 60 W each. ST64 bulbs are recommended.
• A-type E26 bulbs may also be used. If using self-ballasted LED bulbs, use E26 bulbs rated no more than 9 W each.
• Do not exceed the wattage marked on the socket.

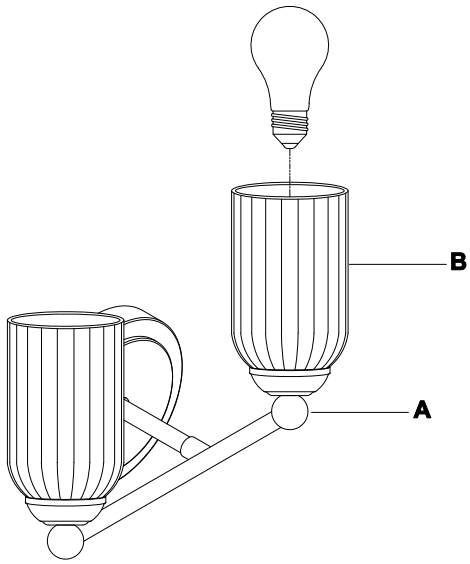

CLEANING

• Turn off power at the circuit breaker or fuse box and allow the bulbs to cool completely before cleaning.
• Wipe metal surfaces with a soft, dry or slightly damp cloth. Clean the glass shades with a soft cloth and a mild, non-abrasive glass cleaner. Apply cleaner to the cloth, not directly to the fixture.
• Do not use solvents, harsh chemicals, scouring pads, steel wool, or abrasive cleaners. Do not immerse the fixture in water.

TROUBLESHOOTING

• If the light does not turn on:
  a) Make sure the bulbs are not burned out and are fully seated in the sockets.
  b) Make sure the wall switch and circuit breaker are ON.
  c) Make sure the wiring connections are secure and correct.
• If a fuse blows or the circuit breaker trips when the light is turned on:
  a) Turn OFF power immediately. Check for crossed or shorted wires, loose connections, or exposed conductors.
  b) If the problem continues, stop using the fixture and contact a qualified electrician.