


Installation 145-5


To avoid scratches and swallowing parts, please do not install by children!

Hardware List		Hardware List	
	1		1
	1		1
	1		1
	4		4
	1		Connecting buckle x1 8x20mm screws x2

1 As shown in the figure: Insert the rod into the corresponding positions of the backrest.

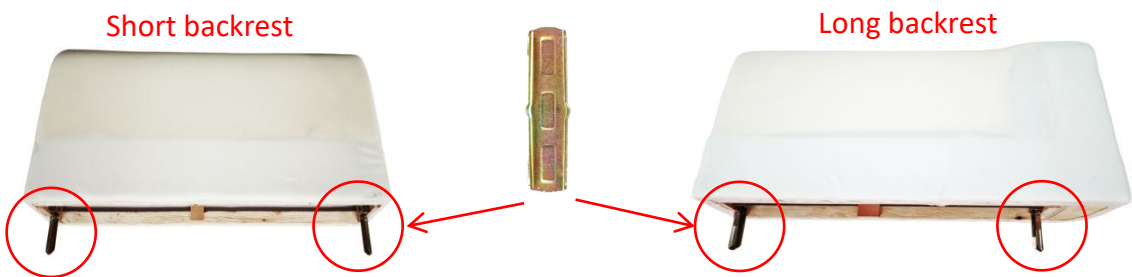

2 Cover the hole with a cover plate.

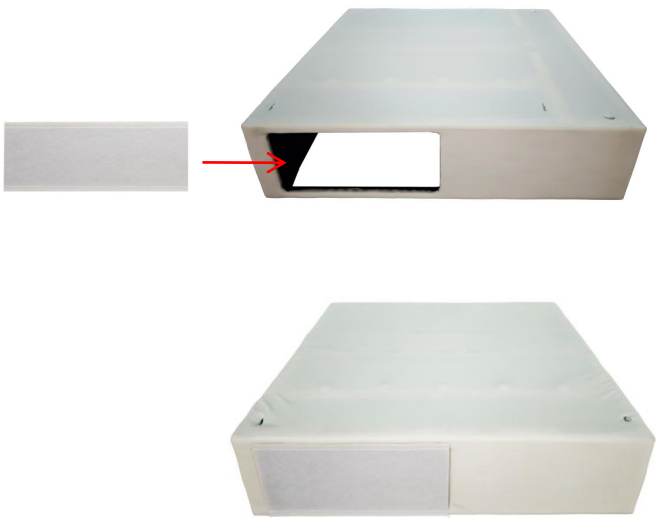

3



3

Put on the sofa cover.

Suggestion: you'd better not remove the protective strip before finish putting the cover on.



4




Secure the legs of the sofa.



5

Place the seat cushion and back cushion.

Note that the side with the zipper on the cushion should face the back.



Zipper

The seat cushion can be attached using Velcro.



or



6

Apply the connection buckles to connect the seats together(or not, it's totally up to users).

