
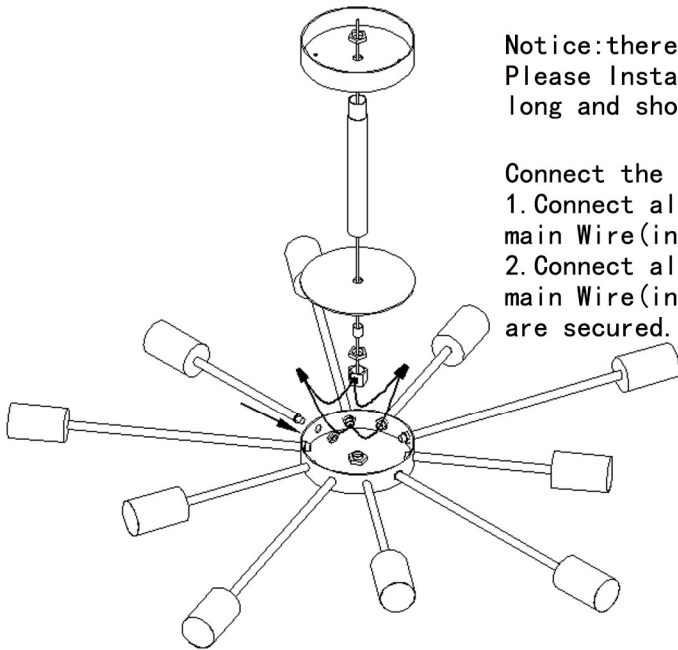


Installation Manual

1. Shut off the power at the circuit breaker and remove old fixture, including the crossbar.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Attach the Mounting Plate to the outlet box (not supplied) by using Screws.

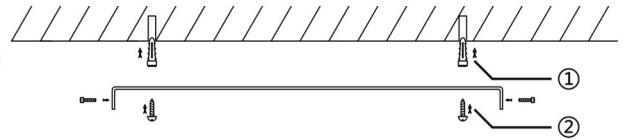

Notice: there are 5 shorter lamp arms and 5 longer lamp arms. Please install the lamp arms on the lamp body in order by long and short.

Connect the electrical wires as follows:

1. Connect all Black wires from the lamp arm to the Black main Wire (in the lamp body).
2. Connect all White wires from the lamp arm to the White main Wire (in the lamp body). Make sure all wires connectors are secured. Please use the wrap the connections with electrical tape.

Connect the electrical wires as follows:

1. Connect the Black wires from the fixture to the Black House Wire (Live Wire, also calls Hot Wire).
2. Connect the White wires from the fixture to the White House Wire (Neutral Wire). Make sure all wires connectors are secured. You may wrap the connections with electrical tape.
3. If your outlet Box has a Ground Wire (Green or bare copper), connect Fixture Ground Wire with it. Otherwise, connect Fixture Ground Wire directly to the mounting plate in the hole with the Green Screw. Tuck the wire connections neatly into the Outlet box.

