



Coralais® | K-15271-4

Utility sink faucet with threaded spout and lever handles

Features

- Metal construction
- Reversible quarter-turn washerless ceramic disc valves
- Threaded swing spout with 6" (152 mm) reach
- Lever handles
- Less drain
- 2.2 gpm (8.3 lpm) maximum flow rate at 60 psi (4.14 bar)



Codes/Standards

ASME A112.18.1/CSA B125.1

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Lever

Spout

Spout Reach: 6" (152 mm)

Flow Rate

Faucet Flow Rate: 2.2 gpm (8.3 l/min)

Recommended Products/Accessories

K-23726 Drain treatment

K-23723 Faucet cleaner

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

7-30-2026 01:24 - US-CA

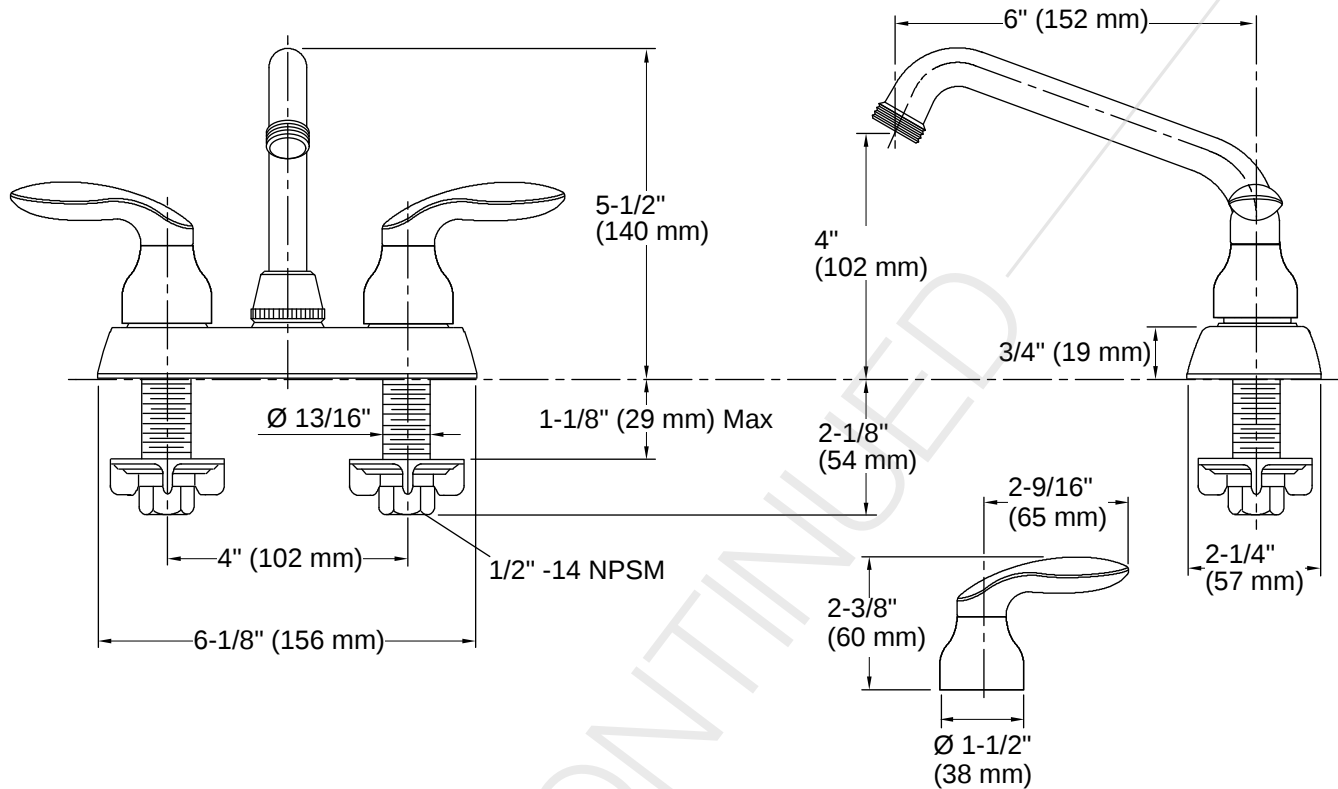

Installation

- For 4" (102 mm) centers

Installation Notes

Install this product according to the installation instructions.

