



ASSEMBLY INSTRUCTIONS

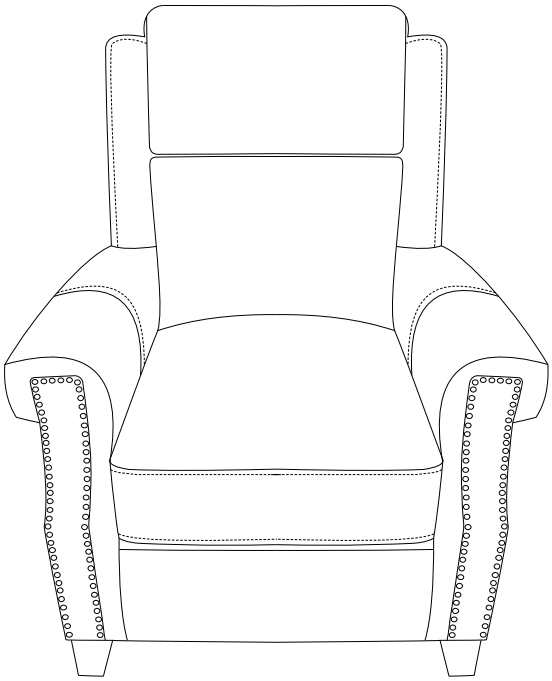


LIST OF PARTS

TOOLS REQUIRED: SCREWDRIVER REQUIRED			
PART LIST			
NO	Description	Item	Quantity
A	PWR RECLINER WITH PHR Backrest		1
B	Left Arm Wing		1
C	Arm Right Wing		1
D	PWR RECLINER WITH PHR Seat		1
E	Wooden Leg		4
F	Screw		4
G	Leg Pad		4
H	Allen key		1
I	Plug Transformer		1

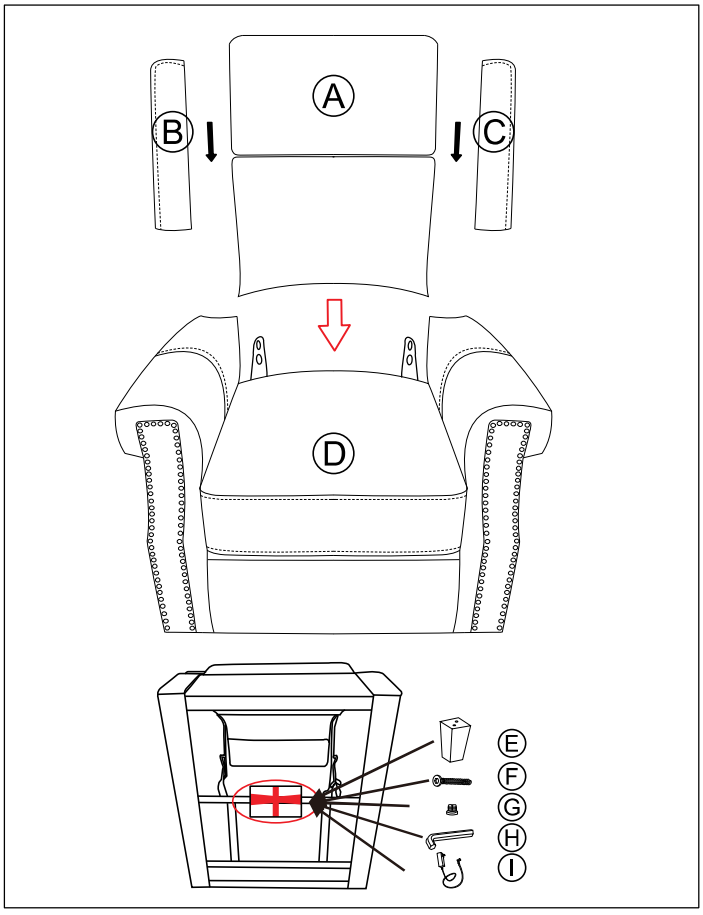


ASSEMBLY INSTRUCTIONS

Step 1:
Install Backrest(A) into the Seat (D) by positioning the female metal receiver brackets over the male metal posts. Ensure that female metal receiver brackets on each side of the backrest are positioned over the seat metal posts. Push down the female brackets over male posts simultaneously until each side is locked into place an audile "click" is heard.
Carefully align the slide of Left Wing (B) with the slide of Back Cushion (A), Right Wing (C) with the slide of Back Cushion (A) and slide into place. Press down firmly until the wing and backrest are aligned.

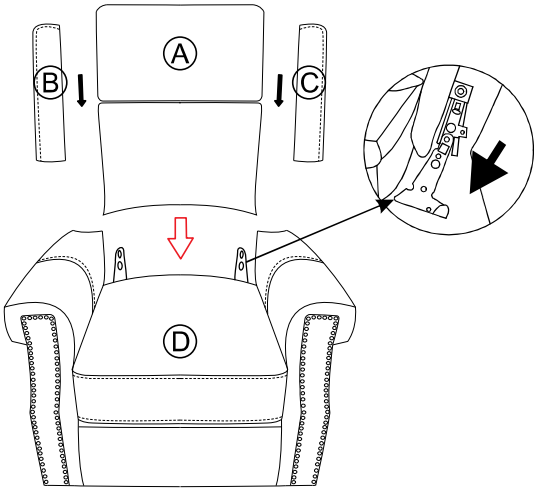


STEP 2: Install the legs (E) by screws (F), then attach the leg pad (G).

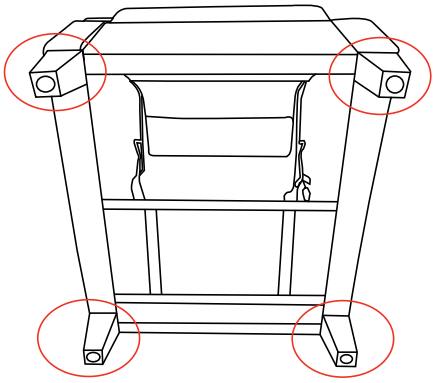


POWER CONNECTIONS

STEP 3: Lift velcroed flap located at the bottom back of the recliner chairs. Latch male wire plug from backrest (headrest motor wire) to female wire receirver located in the back bottom of the reciner undemeath the flap. Locate the wire plug on recliner and latch it to the female wire-receiver on plug transformer, then connect plug transformer to wall outlet.

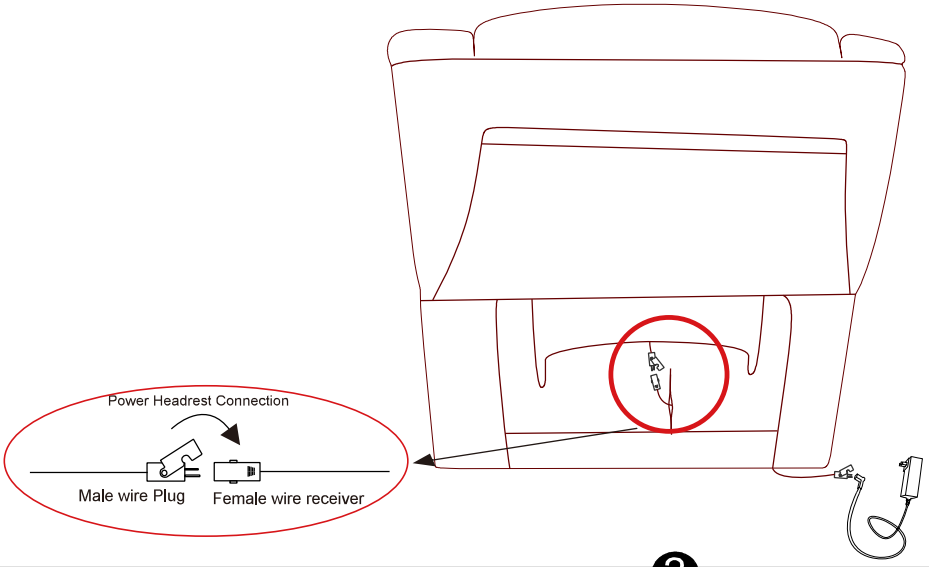


POWER CONNECTIONS

STEP 3: Lift velcroed flap located at the bottom back of the recliner chairs. Latch male wire plug from backrest (headrest motor wire) to female wire receirver located in the back bottom of the reciner undemeath the flap. Locate the wire plug on recliner and latch it to the female wire-receiver on plug transformer, then connect plug transformer to wall outlet.

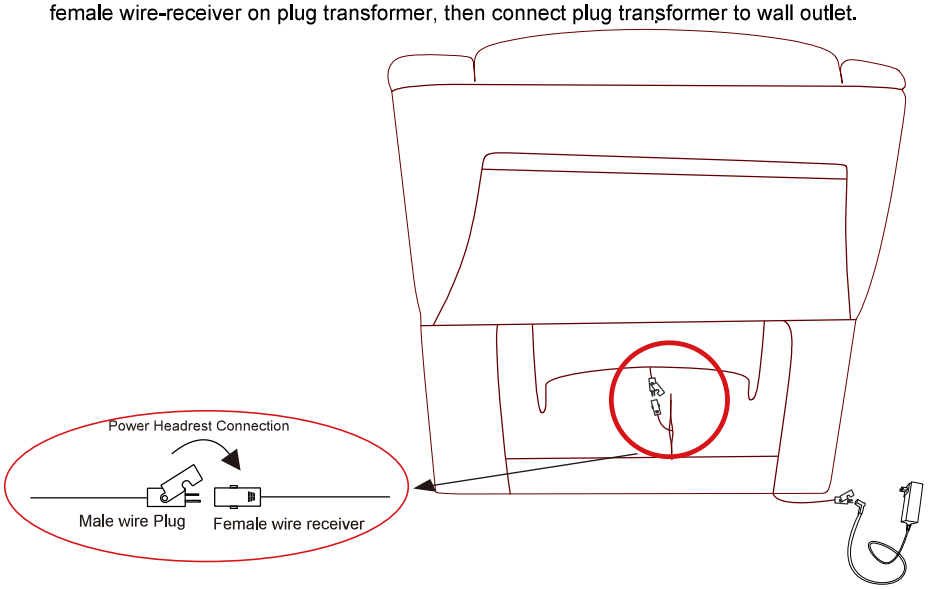


ELECTRICAL CONTROLS

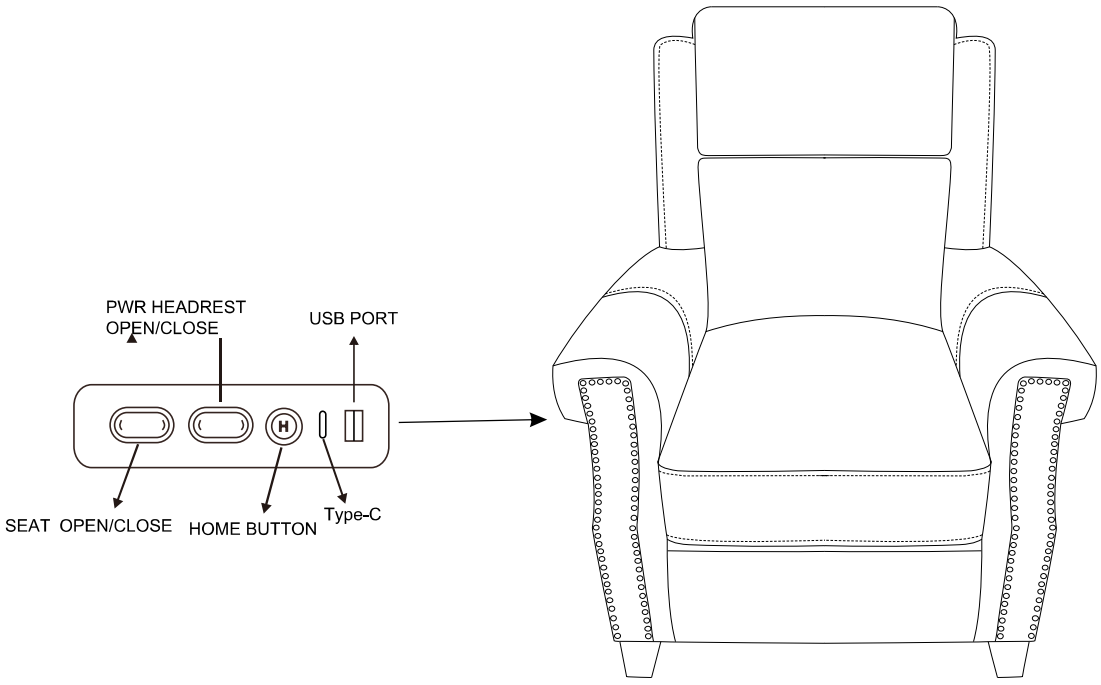


WARNINGS

*Clearance to the wall 30 cm



*Avoid placing unit in areas where unit can be exposed to direct sunlight other powerful light sources,
*Keep unit at least 24" from all heat sources.


as fading or discoloration may occur.



*Do not reach under seat when mechanism is operating or serious injury may occur.
*Reclining mechanism should only be operated while seated properly.



Do not sit on arms or backrest
Do not jump or roughhouse on furniture




*If unit must be moved, do not drag. Unit must be lifted in order to be moved.



*Do not continuously operate mechanism for more than one minute or unit may go into protection mode by shutting down to prevent overheating.
*Unplug unit from power source prior to cleaning mechanism.
*Do not allow electrical components to come into contact with any liquids.

CARE AND CLEANING

*Upholstered furniture is packaged tightly to protect it during transit. This packaging can sometimes cause creases or misshaped cushions when the furniture comes out of the packaging. These issues will correct themselves over time as the fibers of the cushions are exposed to air.However, shaping the cushions with your hands can alleviate the creases and compressed fibers more quickly.

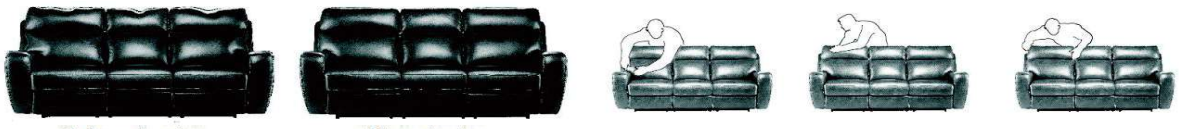

Before shaping After shaping

*Dust often and use a vacuum cleaner to remove debris from seams and crevasses.
*Use a soft damp cloth to gently clean soiled areas and wipe clean. Do not rub.
*Do not use household cleaners or solvents. Such cleaners may cause damage and/or discoloration.
*Do regularly use dedicated leather care product onto the leather furniture to prevent built up of body oils.