


# ITEM: 622-2W

 **INNOVATIONS LIGHTING**  
CREATIVITY MEETS EVOLUTIONARY DESIGN®  
DESIGN COPYRIGHT – 11/04/2022  
ALL RIGHTS RESERVED AND MAY  
NOT BE DUPLICATED WITHOUT OUR  
WRITTEN PERMISSION

PLACE THE COVER PLATE  
ONTO THE FIXTURE MOUNTING  
SCREWS AND SECURE IT INTO  
PLACE USING THE DECORATIVE  
NUTS PROVIDED.

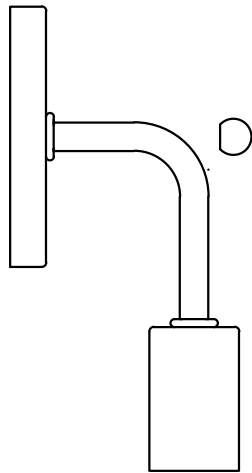


SCREW LIGHT BULBS INTO THE  
SOCKETS AND MAKE SURE THEY  
DO NOT EXCEED THE MAXIMUM  
WATTAGE SPECIFIED ON THE  
FIXTURE'S WATTAGE RATING LABEL

THE LAMP BODY EXCLUDE  
LIGHT BULBS

TO CLEAN, WIPE FIXTURE WITH A  
SOFT CLOTH. CLEAN GLASS WITH  
A MILD SOAP. DO NOT USE ABRASIVE  
MATERIALS SUCH AS SCOURING PADS  
OR POWDERS, STEEL WOOL OR  
ABRASIVE PAPER

# STANDARD MOUNTING PLATE INSTALLATION INSTRUCTIONS

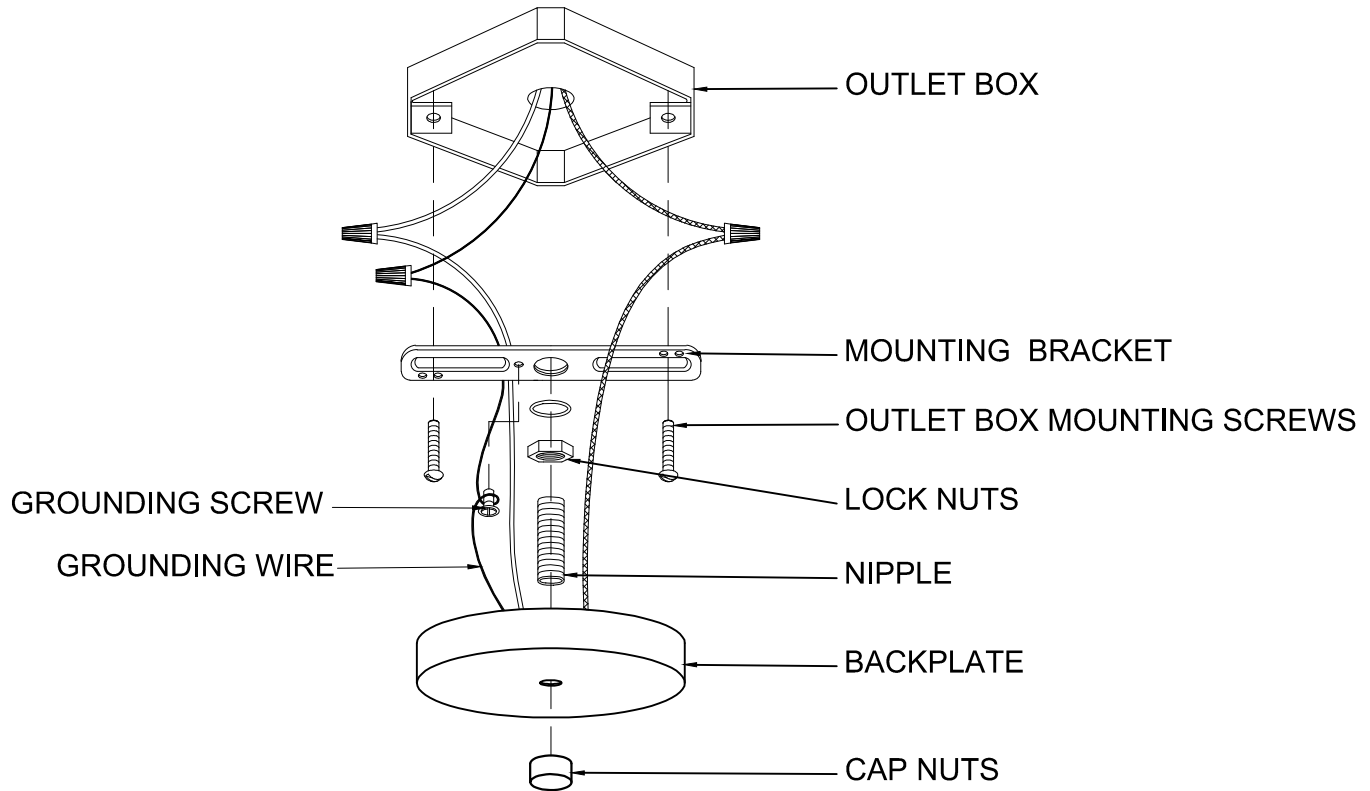

## CAUTION: DISCONNECT POWER DURING INSTALLATION

- 1.) If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring from the outlet box.
- 2.) Thread the nipple into the opposite side of the mounting bracket from the green ground screw, lock the machine screws into place with lock nuts.
- 3.) Fasten the mounting bracket to the outlet box using the two screws supplied with the outlet box.
- 4.) Spread the electrical wires so that the black wires are on one side of the outlet box and the white wires are on the other side.
- 5.) Grounding instructions:
  - A.) On fixtures where mounting bracket is provided with a green ground screw and two raised dimples, Wrap ground wire from outlet box around green ground screw and tighten.

- B.) On fixtures where mounting bracket is provided with a green ground wire attached. Connect mounting bracket ground wire to ground wire from outlet box with wire connector(not provided).  
If fixture is provided with ground wire. Connect fixture ground wire to ground wire from outlet box with wire connector (not provided). After following the above steps. Never connect ground wire to black or white power supply wires.
- 6.) To make electrical connections:  
Connect the white wire(s) from the fixture to the white wire of this outlet box. Connect the black wire(s) from the fixture to the black wire of the outlet box. NOTE: Black outlet box wire may be red, round & smooth and/or have copper conductor. White outlet box wire may be square & ridged and/or have a silver conductor.
- 7.) Place fixture against mounting bracket allowing the machine nipple to pass through the fixture backplate. Secure with cap nuts.